

5-PIN MALE EURO
QD CONNECTOR

18.9
[.74]

17.5-20.3
[0.69-0.8]

FIRST BEAM

4X M4 X 0.7
19 in-lbs [1.6 ft-lbs]
RECOMMENDED TORQUE

42.0
[1.65]

LAST BEAM

609.98
[24.015]

32.5
[1.28]

42.3
[1.67]

39.6
[1.56]

38.2
[1.5]

48.7
[1.92]

4X 8.5
[.33]

6X 4.5
[.18]


3X 25.0
[.98]

PLACE BRACKETS TO ENSURE
THE UNSUPPORTED LENGTH IS
LESS THAN 900mm

68.2
[2.68]

7.5
[.3]

(25.0)
[.98]

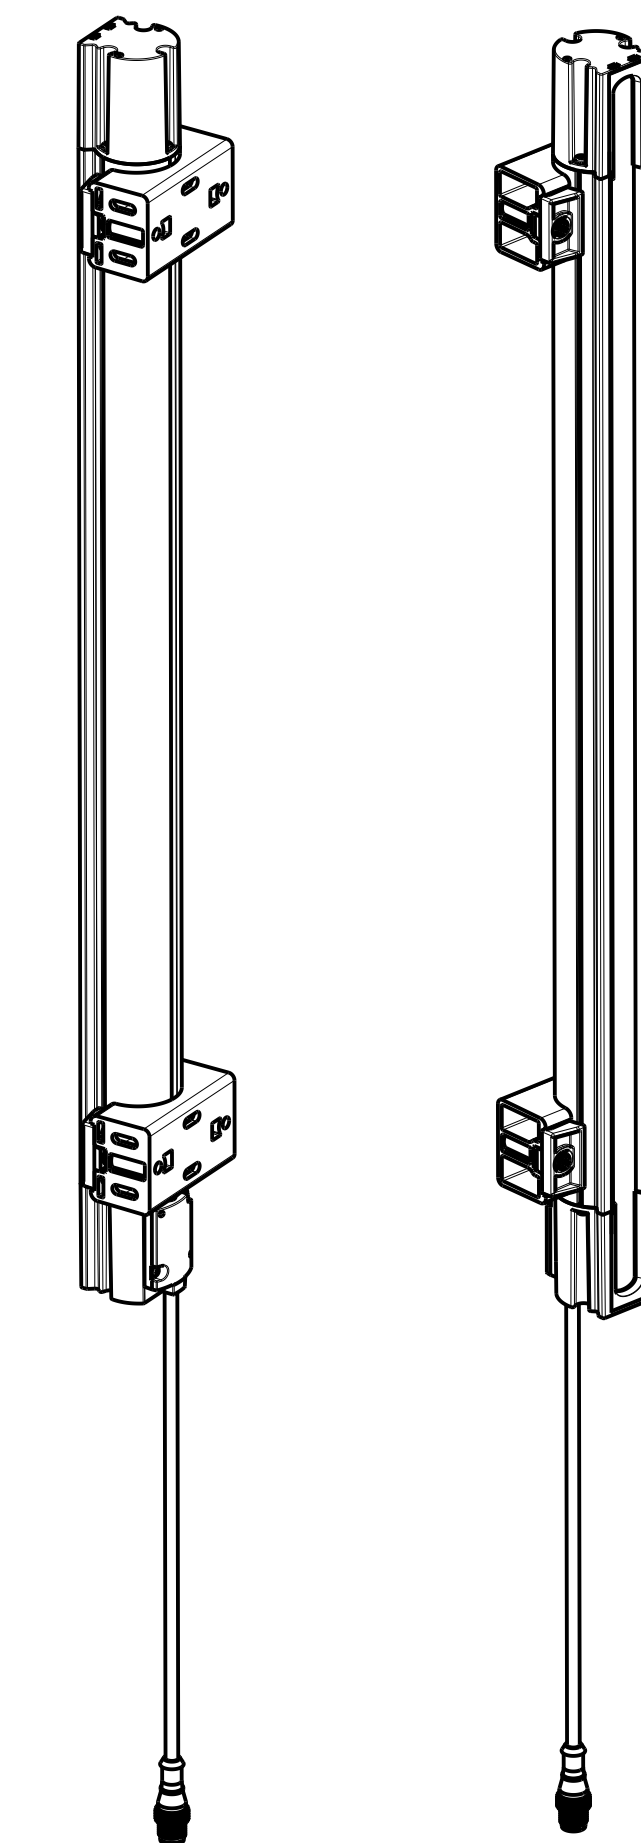


ISOMETRIC VIEW
SCALE 3:10

ISOMETRIC VIEW
SCALE 3:10

NOTES:
1. ALL DIMENSIONS ARE MILLIMETERS [INCHES] UNLESS OTHERWISE NOTED.
2. REFER TO "www.bannerengineering.com" FOR ADDITIONAL DATA AND SPECIFICATIONS.

This drawing is the property
of BANNER ENGINEERING CORP.
Any use or reproduction,
in any form, without prior
written permission of
Banner is prohibited.
© 2015 Banner Engineering Corp.

THIRD ANGLE PROJECTION



BANNER BANNER ENGINEERING CORP.
www.bannerengineering.com

TITLE
S4BR30 SLC 600MM

SIZE D DRAWING NO. **228984** REV. **A**

SCALE 4:5 SHEET 1 OF 1

CREO