


Safety Solutions



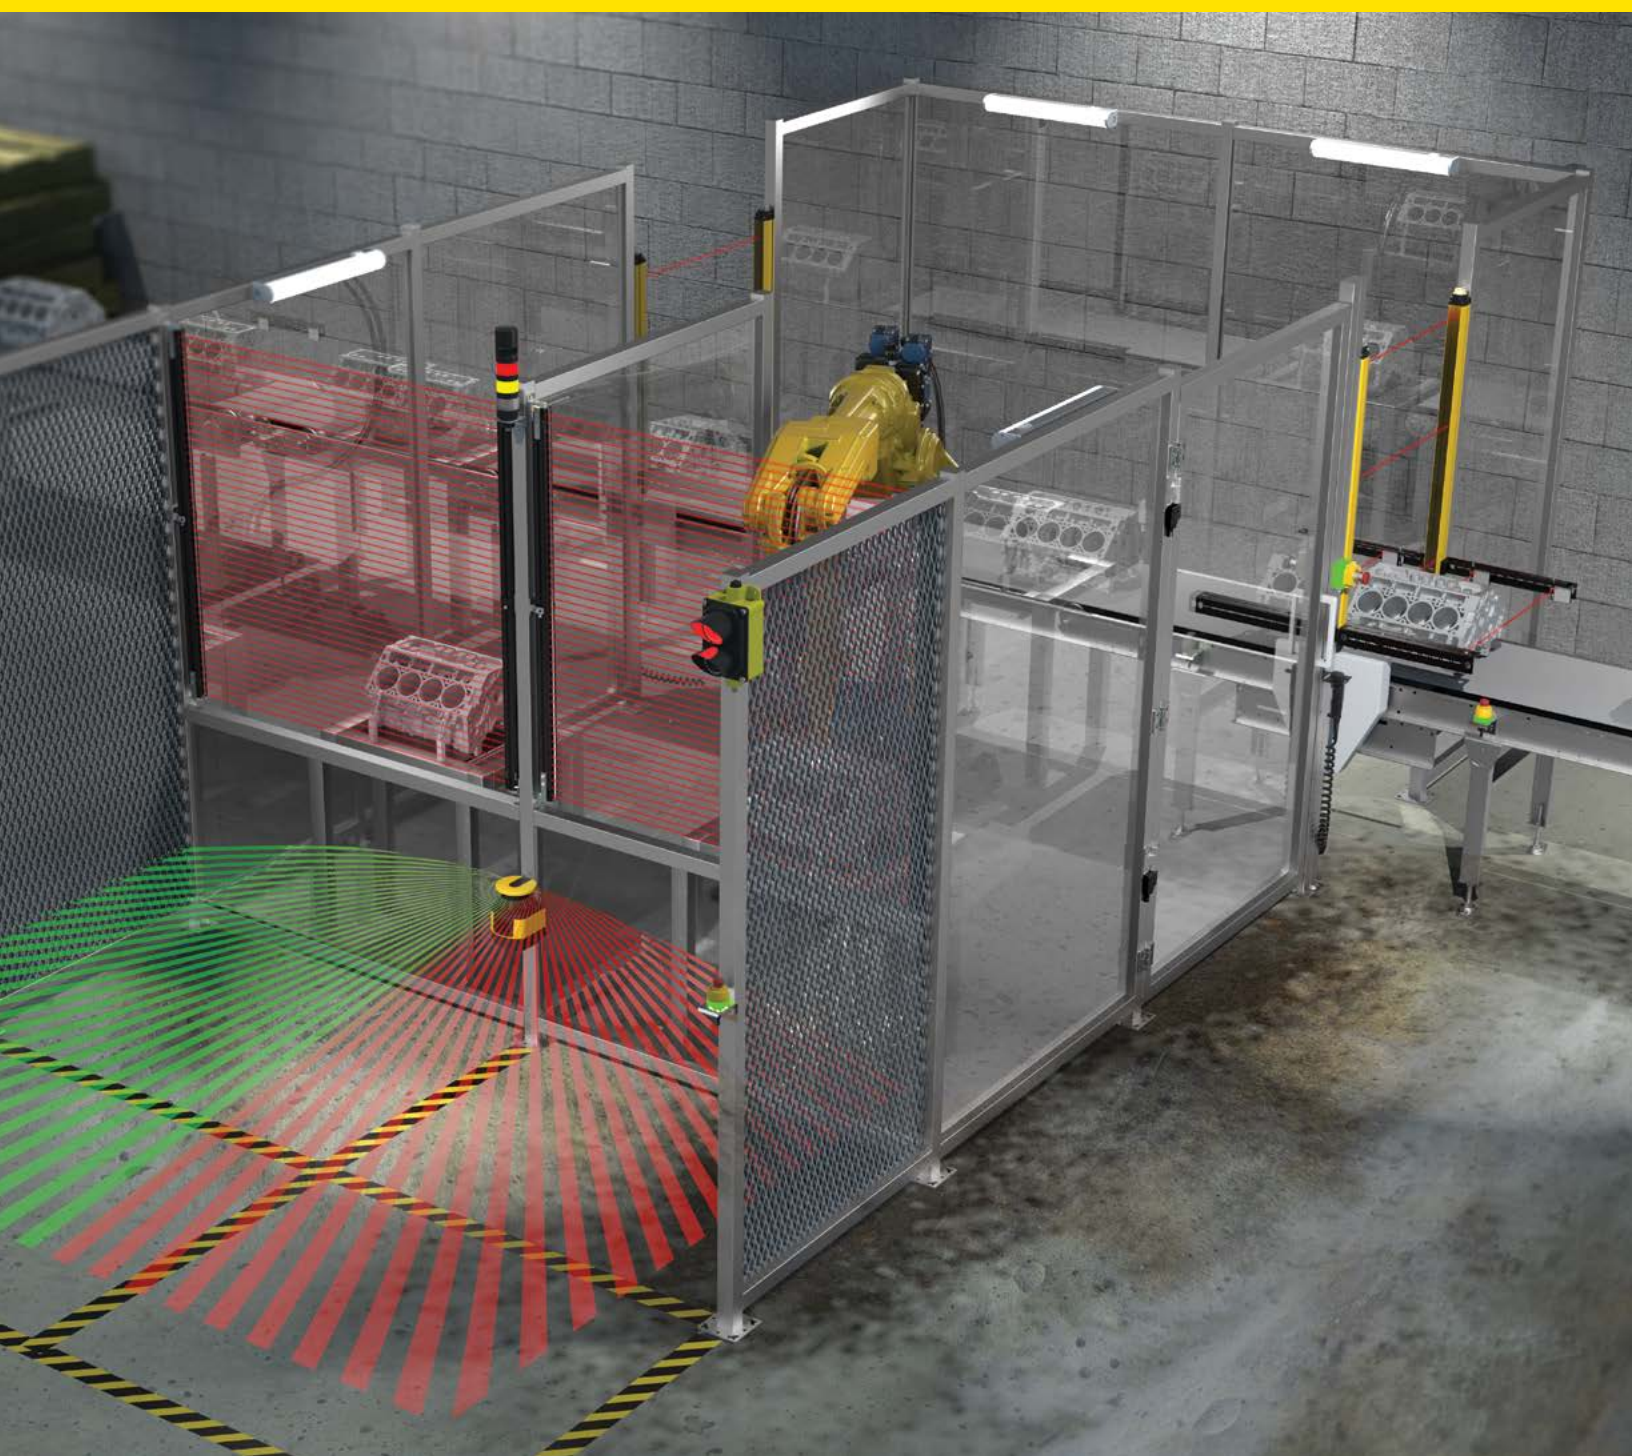

Contents

| | |
|---|---|
| Complete Safety Solutions from Banner | 4 |
| Network Technology Down to the Device Level | 6 |
| Banner In-Series Diagnostics (ISD) | 8 |

Hand, Finger and Body Detection

| | |
|---|----|
| Choosing a Safety Light Curtain | 10 |
| S4B Type 4 Heavy-Duty Light Curtains | 12 |
| EZ-SCREEN LS Type 4 Heavy-Duty Light Curtains | 16 |
| EZ-SCREEN 14/30 Type 4 Light Curtains | 20 |
| EZ-SCREEN LP Type 4 Compact Light Curtains | 22 |
| EZ-SCREEN LS2 Type 2 Light Curtains | 24 |
| SGS Type 4 Safety Light Grids | 26 |

Area Detection

| | |
|--|----|
| Choosing a Safety Scanner | 30 |
| Safety Scanner System | 32 |
| Safety Scanner Software | 35 |
| Safety Scanner Fixed Applications | 36 |
| Safety Scanner Mobile Applications | 37 |

Safety Relays and Controllers

| | |
|--|----|
| Choosing a Relay and Controller | 38 |
| Safety Relays and Safety Controllers | 40 |
| In-Series Diagnostics Functionality | 43 |
| System Software | 44 |
| Safety Relay Models | 46 |
| Safety Controller Models | 47 |

Safety Switches

| | |
|--|----|
| Choosing a Safety Switch | 48 |
| Safety Switches | 50 |
| Non-Contact RFID Safety Switches | 52 |
| Enabling Devices | 53 |
| Safety Switch Models | 54 |

Operator Controls

| | |
|---|----|
| Choosing an Emergency Stop Device | 58 |
| E-Stop Device Models | 60 |

Complete Safety Solutions from Banner



Safety Light Curtains

- Intuitive and easy-to-use and set up
- End-to-end sensing
- Heavy-duty aluminum housing and recessed window to avoid damage in harsh environments
- Highly visible alignment and diagnostic indicators
- IP69 hygienic models available for washdown environments
- Cascade capable models available
- See page 10




Safety Controllers

- Up to eight expansion I/O modules can be added as your safety application grows or changes
- Configuration software is so simple that you will be programming in minutes
- Simulator functionality allows users to test their configurations without being connected to a controller
- Available with ISD, which provides an array of data including device status, voltage, temperature, RFID tag value, sensing distance, and more
- View and configure your controller remotely using Banner's network access feature
- See page 38




Safety Laser Scanners

- Two-dimensional laser scanner with easy-to-use software
- Programming of irregular shaped warning and detection zones
- 275° scanning angle with selectable resolutions and 5.5 m range
- See page 30

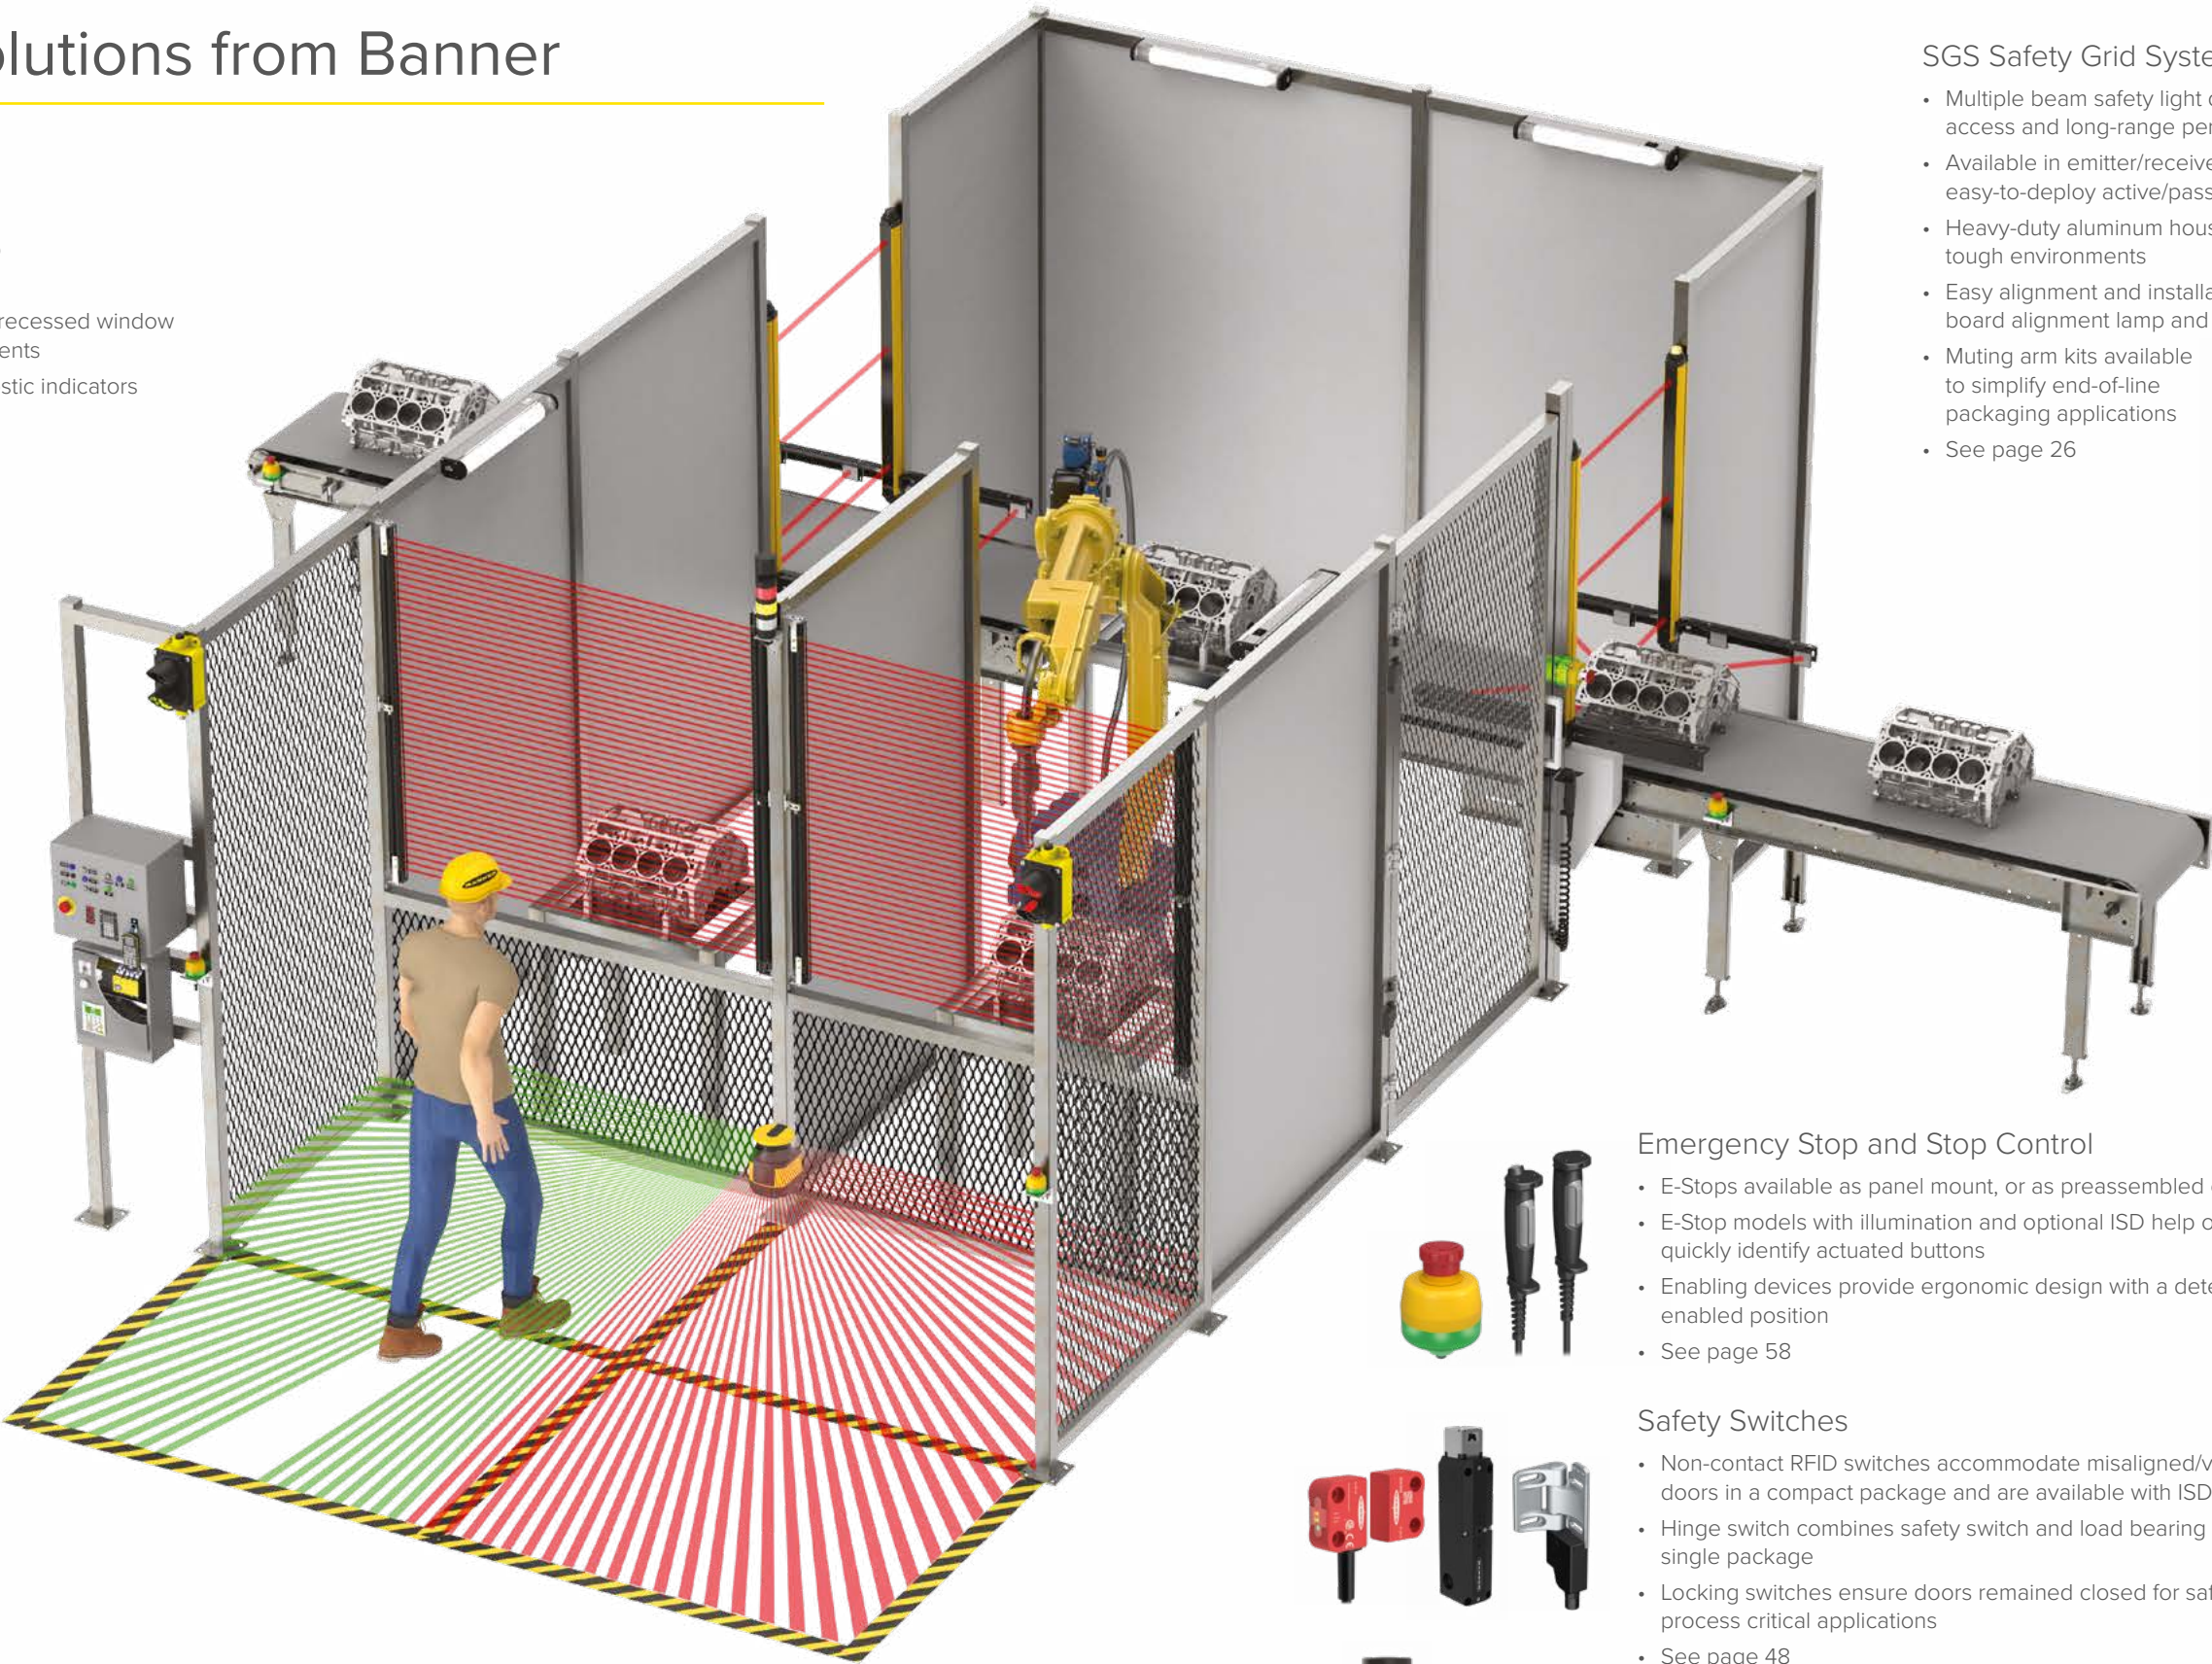

SGS Safety Grid Systems

- Multiple beam safety light devices for access and long-range perimeter guarding
- Available in emitter/receiver models and in easy-to-deploy active/passive models
- Heavy-duty aluminum housing for tough environments
- Easy alignment and installation with on-board alignment lamp and indicators
- Muting arm kits available to simplify end-of-line packaging applications
- See page 26

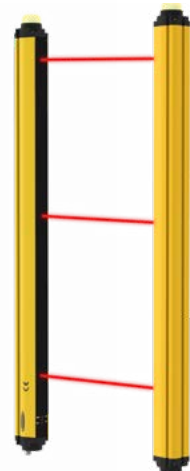

Emergency Stop and Stop Control

- E-Stops available as panel mount, or as preassembled enclosures
- E-Stop models with illumination and optional ISD help operators quickly identify actuated buttons
- Enabling devices provide ergonomic design with a detent enabled position
- See page 58



Safety Switches

- Non-contact RFID switches accommodate misaligned/vibrating doors in a compact package and are available with ISD
- Hinge switch combines safety switch and load bearing hinge in a single package
- Locking switches ensure doors remained closed for safety and process critical applications
- See page 48





Lighting and Indication

- Preassembled and preconfigured multi-segment LED tower light indicators
- Programmable multicolor LED indicators, panel mount models available
- Pro Editor software offers a wide variety of color and animation options



Network Technology Down to the Device Level

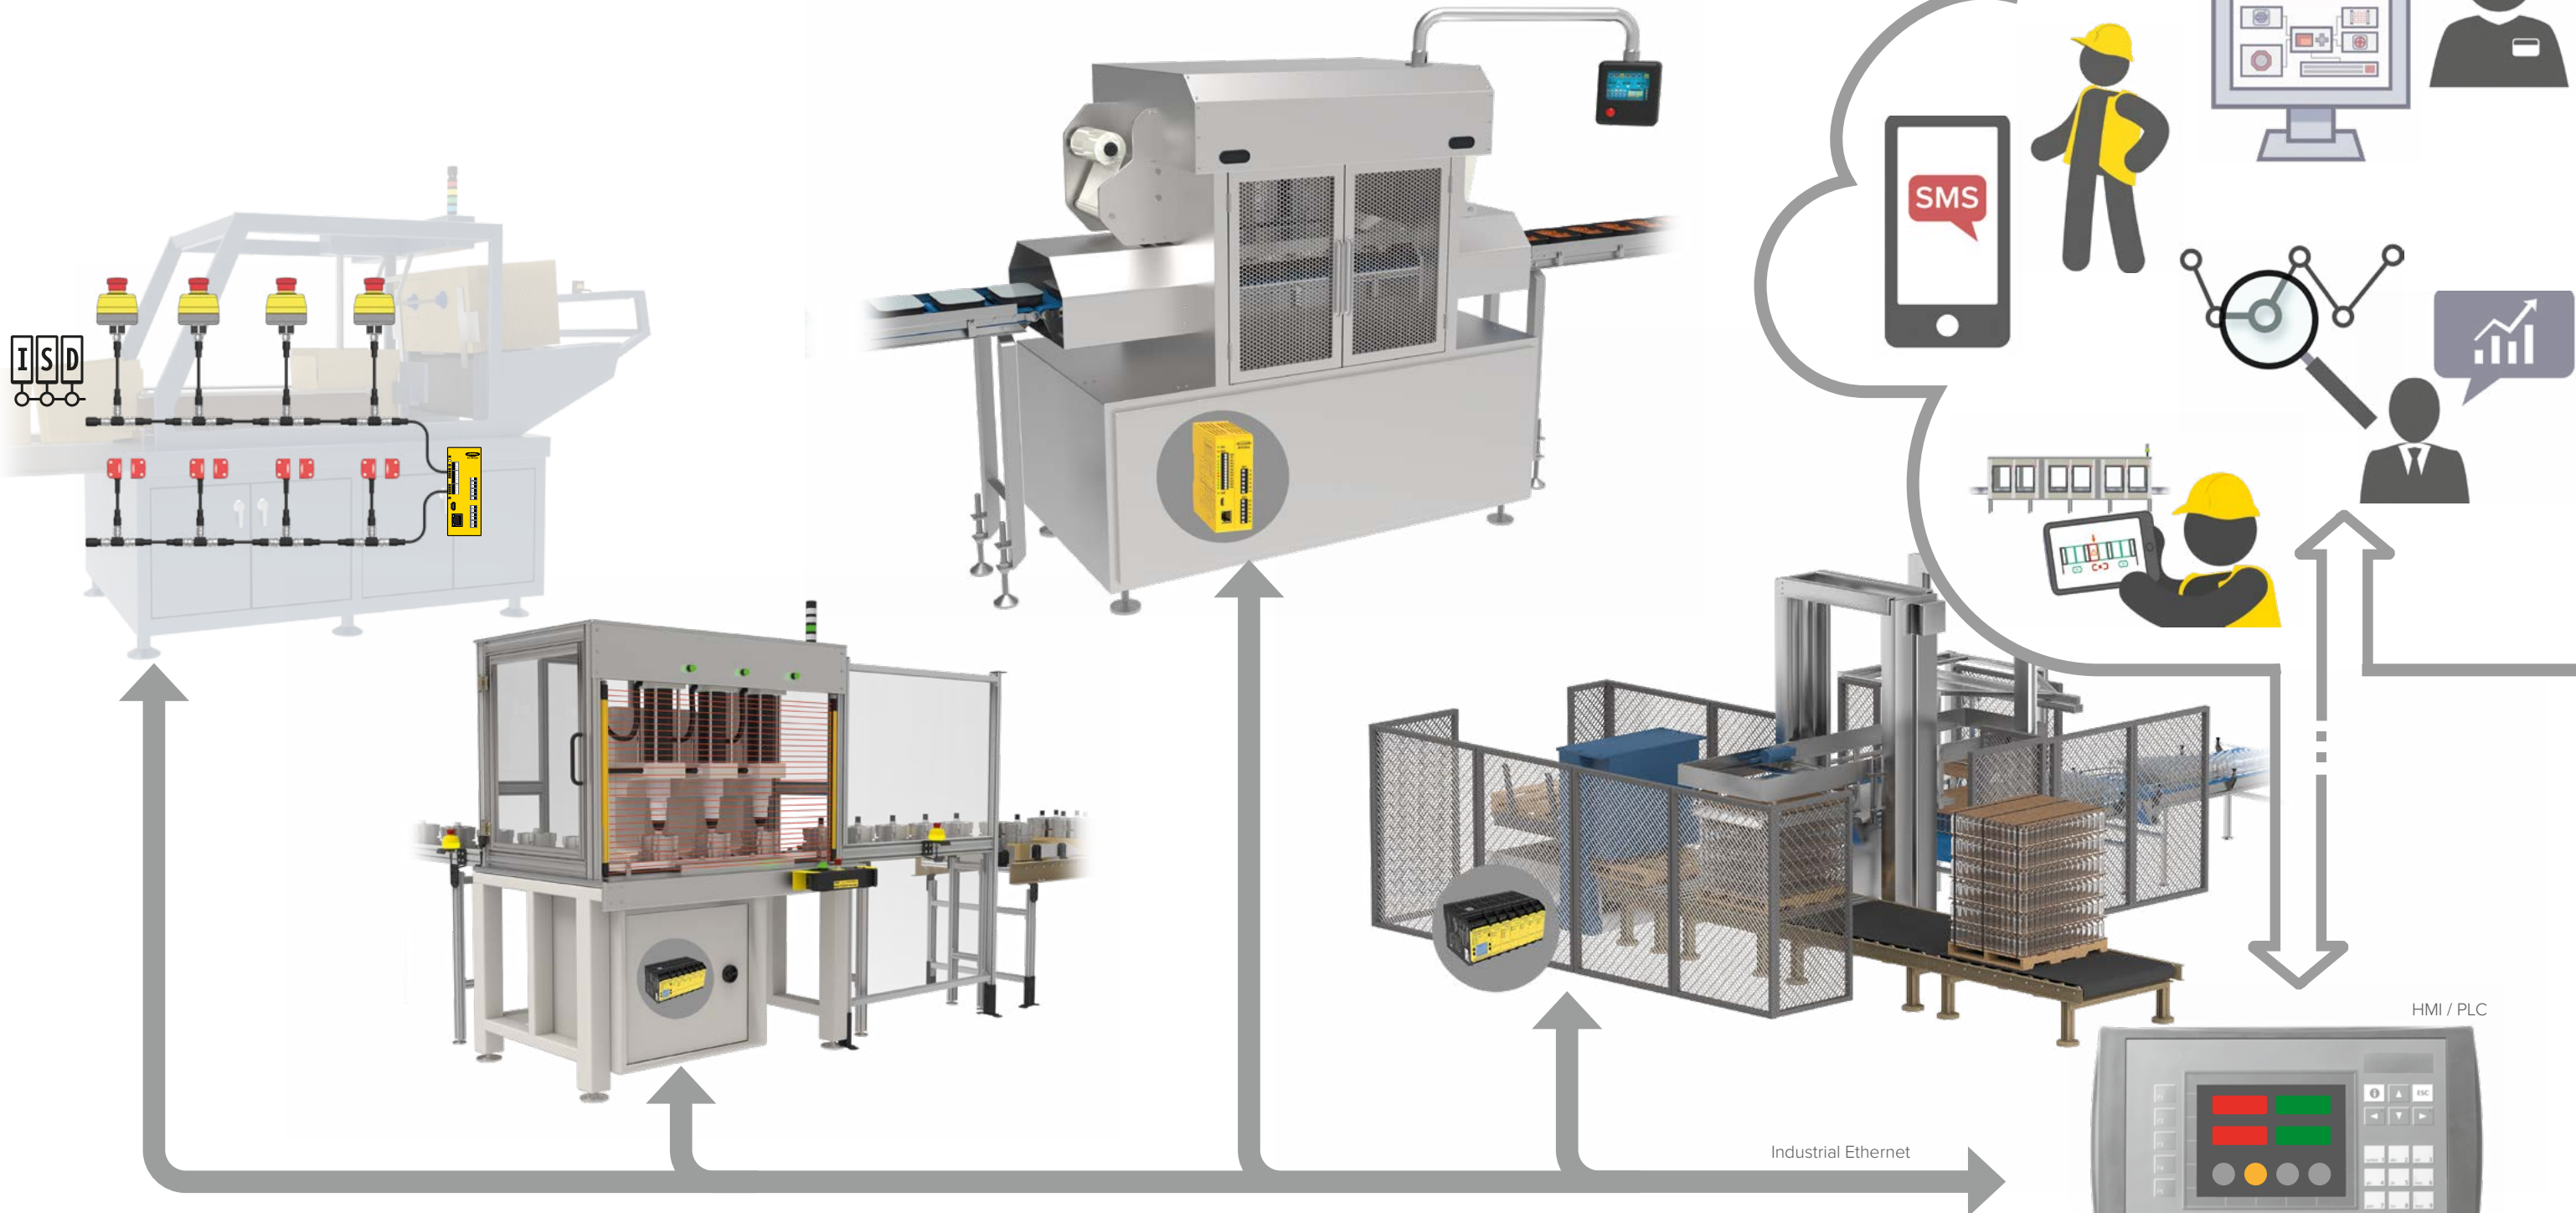

Banner In-Series Diagnostics

- Up to 32 ISD devices connected with one in-series cable communicate directly with PLC/HMI
- ISD provides an array of data including device status, voltage, temperature, RFID tag value, sensing distance, and more

1234567890

74.5°C

13.7v

Status: ON

Alignment: OK

08.0mm

Safety System Diagnostics

- Reduce downtime by quickly diagnosing safety events and displaying them on the HMI
- Prevent downtime with ISD preventive maintenance alerts

Virtual Reset

- Eliminate physical button & wires
- Reset from touch screen HMI over Industrial Ethernet

EtherNet/IP

Modbus TCP/IP

PROFINET

EtherCAT



Intuitive setup and PLC integration

Free, easy-to-use PC software

- Export tag feature for easy tag creation in a PLC (patent pending)

ISD Banner In-Series Diagnostics (ISD)

Easy-to-Implement Diagnostic Capabilities for Complex Safety Systems

In-Series Diagnostics allows connection of up to 32 devices with one in-series connection and communicate directly with the most commonly used PLCs.

When a safety event occurs the system receives an alert that includes information about which safety device tripped, making troubleshooting a breeze.

In-Series Diagnostics provides an array of additional data points for each in-series device used, including a unique tag value, internal temperature, voltage, and more, along with device-specific details such as the alignment and distance between a safety switch's sensor and actuator.

Additionally, the system sends warning alarms if devices are near to tripping, so issues can be addressed before your machine shuts down.




Cut Costs







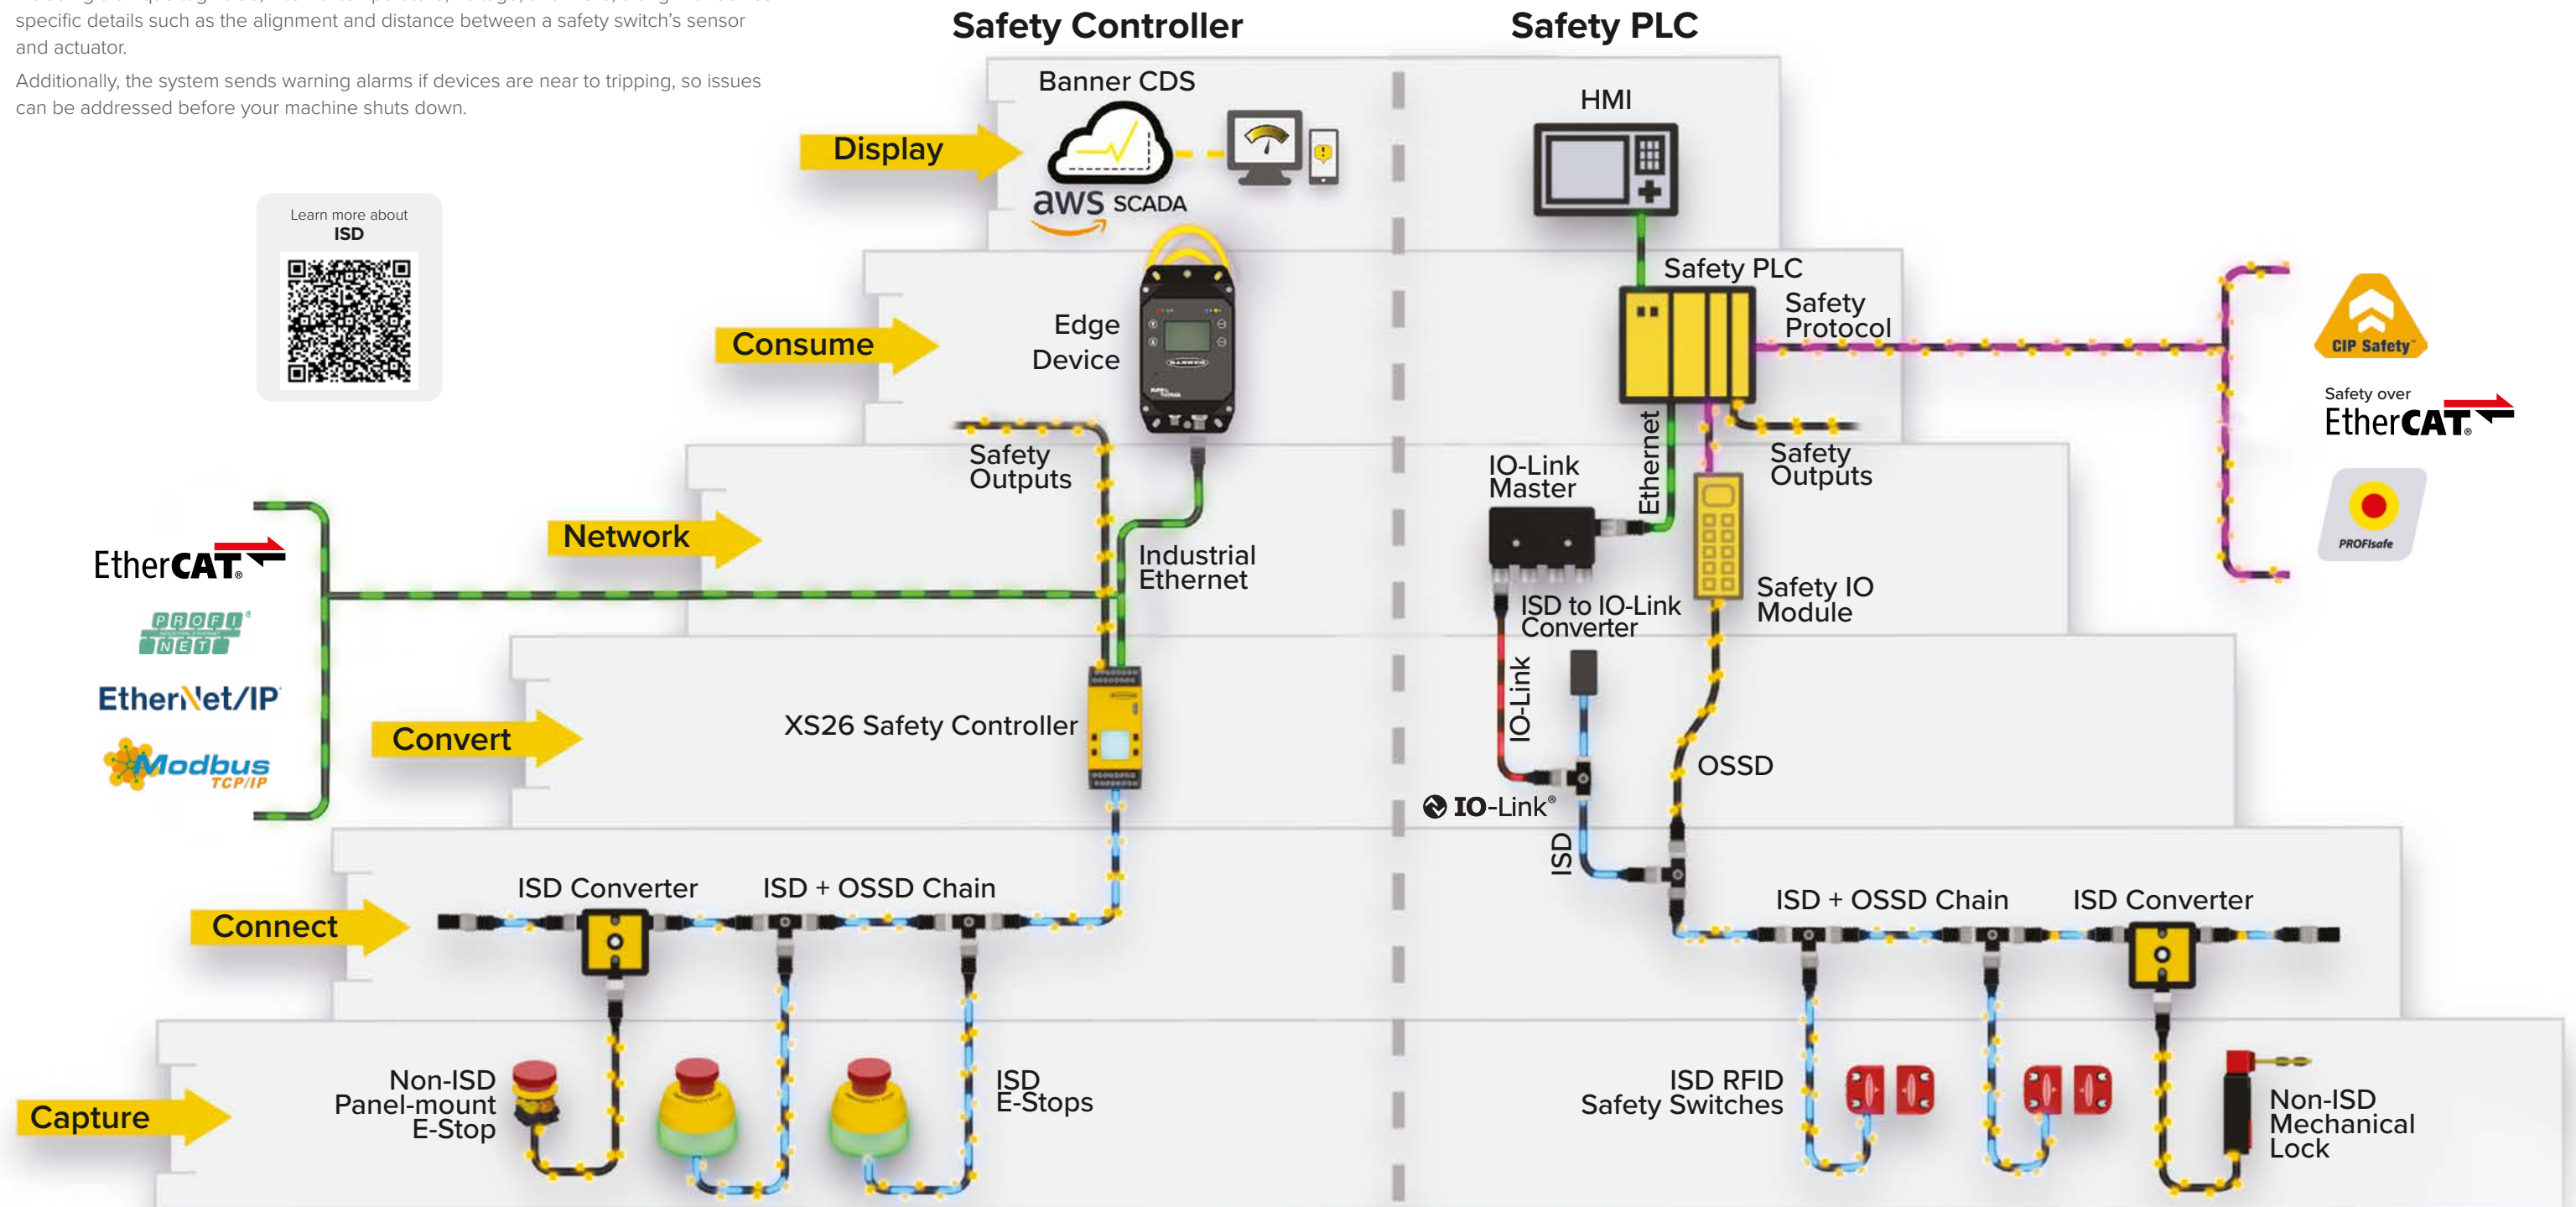

Simplify Installation & Troubleshooting



Prevent & Reduce Downtime




Safety Light Curtain Selection Guide

| | | | | | | | | | | | | | |
|---|--|--|--|--|--|---|--|---|--|---|--|---|--|
|  | | | |  | |  | |  | |  | |  | |
| S4B | | | | EZ-SCREEN LS | | EZ-SCREEN 14/30 | | EZ-SCREEN LP | | EZ-SCREEN LS2 | | SGS Grids | |
| | p. 12 | | | p. 16 | | p. 20 | | p. 22 | | p. 24 | | p. 26 | |
| Type IEC 61496-1, -2 | Type 4 | | | Type 4 | | Type 4 | | Type 4 | | Type 2 | | Type 4 | |
| Safety Rating EN ISO 13849-1; IEC 61508; IEC 62061 | Category 4 PL e; SIL3 | | | Category 4 PL e; SIL3 | | Category 4 PL e; SIL3 | | Category 4 PL e; SIL3 | | Category 2 PL c | | Category 4 PL e; SIL3 | |
| IP Rating | IP65 | | | IP65, IP67, IP69K option | | IP65 | | IP54, IP65 | | IP65 | | IP65 | |
| Dimensions W x D (mm) | 38 x 38 | | | 36 x 45 | | 36 x 45 | | 28 x 26 | | 25 x 32 | | 52 x 56.9 | |
| Resolution (mm) | 14, 30 | | | 14, 23, 40 | | 14 30 | | 14, 25 | | 30 | | 300, 400, 500 | |
| Max Sensing Range (m) | 12 | | | 12 | | 6 18 | | Basic: 4 Standard: 7 | | 15 | | Standard: 30 Long Distance: 60 | |
| Defined Area (mm) | 14 mm: 300 to 1200 30 mm: 300 to 1800 | | | 14 mm: 280 to 1820 23 mm: 280 to 2380 40 mm: 280 to 1820 | | 150 to 1800 150 to 2400 | | Basic: 270, 410, 550, 690 Standard: 270 to 1250 | | 150 to 1800 | | 500 to 1200 | |
| Increments (mm) | 150 | | | 70 | | 150 | | Standard: 140 | | 150 | | 2, 3, 4 Beams | |
| Functions | | | | | | | | | | | | | |
| Hand Detection | ✓ | | | ✓ | | ✓ | | ✓ | | ✓ | | | |
| Finger Detection | ✓ | | | ✓ | | ✓ | | ✓ | | | | | |
| Body Detection | | | | | | | | | | | | ✓ | |
| Cascade | ✓ | | | SLLC | | SLSC | | SLPC | | | | | |
| Scan Codes | ✓ | | | ✓ | | ✓ | | ✓ | | | | ✓ | |
| Fixed Blanking | | | | ✓ | | ✓ | | ✓ | | | | | |
| Reduced Resolution | | | | | | ✓ | | ✓ | | | | | |
| EDM | ✓ | | | ✓ | | ✓ | | ✓ | | ✓ | | ✓ | |
| Reset | | | | | | ✓ | | ✓ | | ✓ | | ✓ | |
| Integrated Muting | | | | | | | | ✓ | | | | ✓ | |
| LED on Top | | | | Accessory | | | | | | | | ✓ | |

S4B Type 4 Heavy-Duty Light Curtains

Designed for a broad range of applications, the next generation of safety light curtains has essential features including remote indication for predictive maintenance.

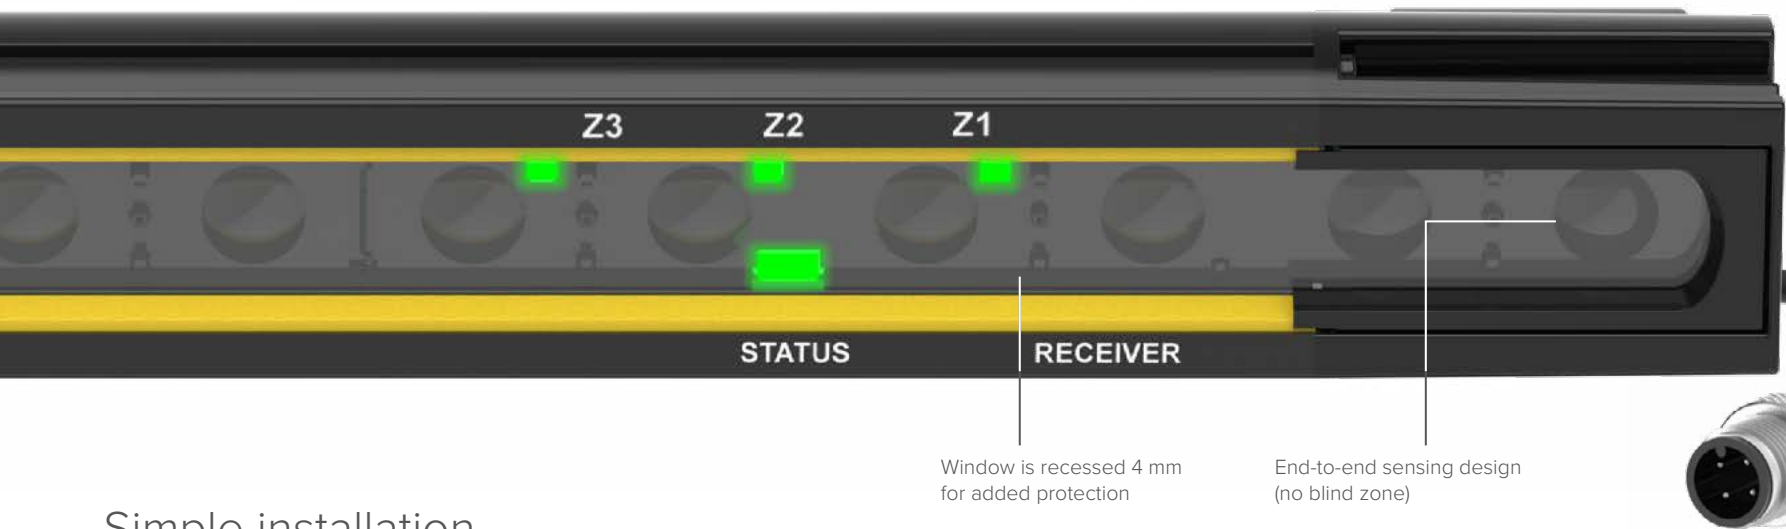

Simple installation

The S4B gives you more flexibility when deciding how to mount light curtains on your machine. Choose from either center-mount brackets or end cap brackets, both offering up to 15 degrees of freedom to align the emitter and receiver. Once the light curtains are mounted, alignment is further simplified with the onboard alignment zone indicators as shown below.



Alignment Zone Indicators




Intuitive Setup and Swap-out

Select and save scan code setting without a PC for easy setup and swap-out



Prevent Downtime

Yellow indicates a weak signal due to a dirty lens.
A weak beam strength output is sent via pin 5 to a PLC or HMI alerting operators to preventive maintenance needs.

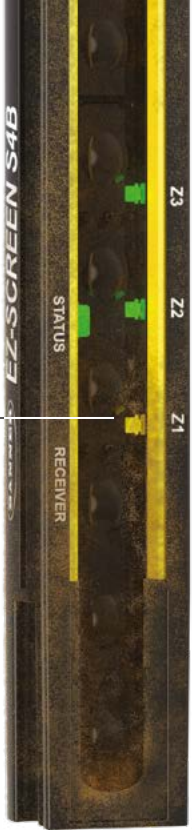

Reliable Finger Detection

The S4B is available with 14-millimeter resolution for reliable finger detection



Reliable Hand Detection

The S4B is available with 30-millimeter resolution for reliable hand detection

1. Select Emitter and Receiver

| Series | Device Type | Resolution | Defined Area | | Termination |
|---------------------------------------|-------------|--------------------------|--|--|--|
| S4B | E | 30 | — | 900 | S |
| E = Emitter only R = Receiver only | | 14 = 14 mm 30 = 30 mm | 300 = 300 mm 450 = 450 mm 600 = 600 mm 750 = 750 mm 900 = 900 mm 1050 = 1050 mm | 1200 = 1200 mm 1350 = 1350 mm* 1500 = 1500 mm* 1650 = 1650 mm* 1800 = 1800 mm* | S = Single Emitter or Receiver (S4B Bracket(s) and S4B Cordset(s) sold separately) |

*Only available in 30 mm resolution

2. Add S4B Brackets (required)



3. Add S4B Cordsets (required)





Cascading Options

Save Installation and Setup Time with Auto Cascading

Auto cascading in the S4B speeds setup and installation, automatically recognizing the next light curtain as it is connected. The minimal response time impact when cascaded allows the S4B to be installed closer to the equipment being guarded, making more efficient use of valuable floor space.

Simplify Installation and Maintenance with Specially Designed Cordsets

Cordsets determine if the light curtain is used as a standalone pair or as part of a cascade. Specific connection genders and color-coded cordsets simplify and error-proof installation, using yellow for connecting multiple light curtain sticks while black runs back to the controller. Up to four pairs can be connected, including pairs of different resolutions or lengths.

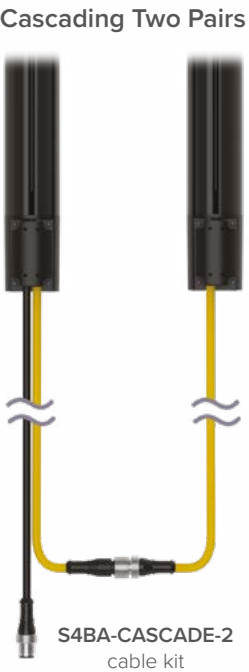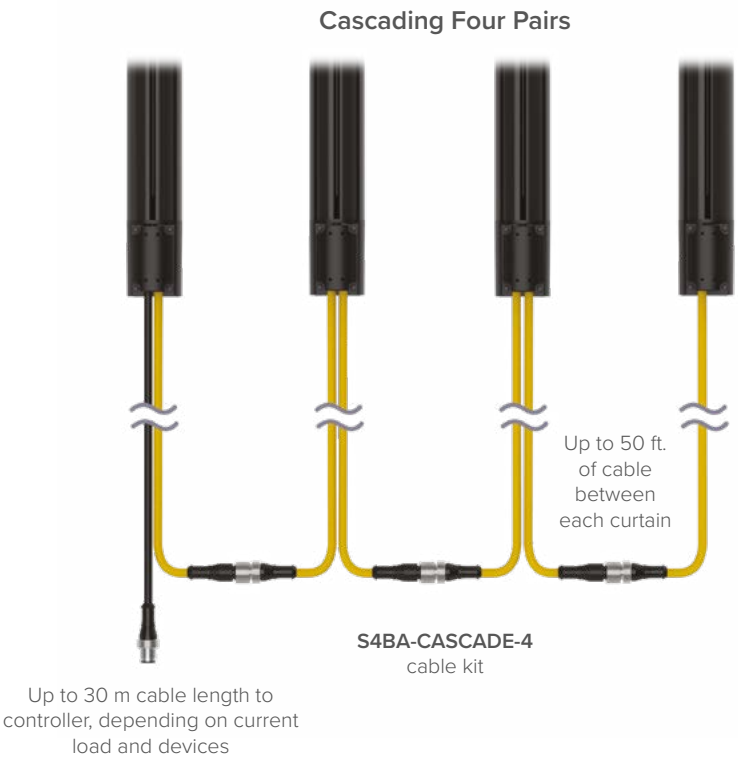


Muting Accessories

Muting allows objects to pass through operational light curtains by temporarily suspending their safety function, then resuming after the object has passed through the light curtain's beams. Mute arms protect sensors from damage and misalignment. Flexible mounting options for photoelectric sensors accommodate a wide range of object sizes passing through. The S4B muting junction box consolidates wiring by combining the S4B light curtains and non-safety sensors into one block.



R95-6M125-M128-S4BM
S4B Muting Junction Box

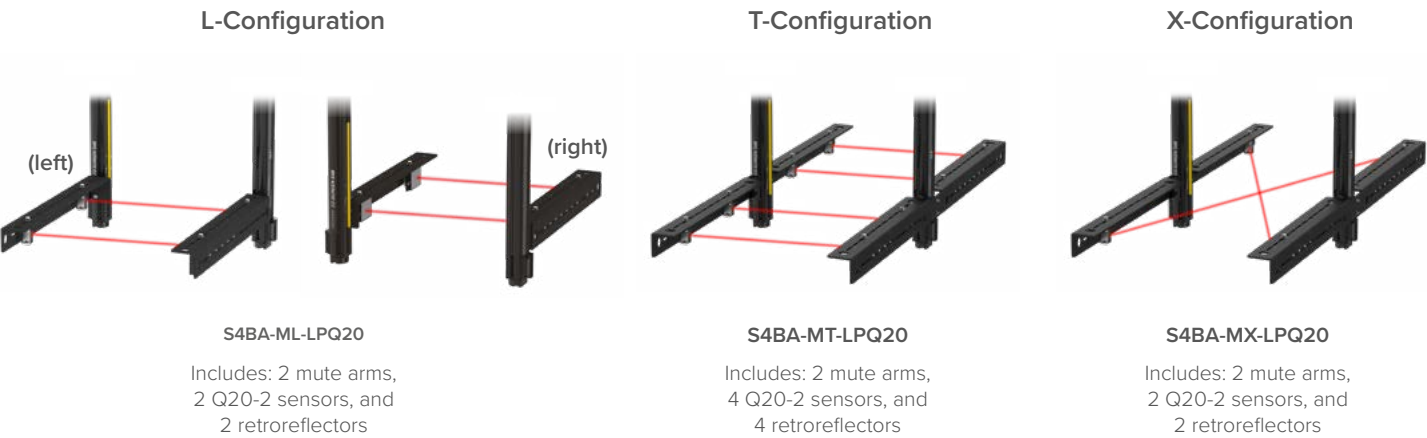

| Mute Arm Kit | Box or Pallet Muting | | |
|------------------|----------------------|---------------|----------------------|
| | Enter/Exit Direction | Width & Shape | Position on Conveyor |
| L-Configuration | One-way (exit) | Varying | Varying |
| X- Configuration | Bi-Directional | Consistent | Consistent |
| T-Configuration | Bi-Directional | Varying | Varying |

Remote Fixed Blanking Accessories



With the turn of a key, Remote Fixed Blanking allows users to quickly configure portions of the S4B light curtain's sensing field to ignore fixed objects such as brackets, tooling, or part supports—enabling fast teaching or reteaching to adapt to changes in fixture configuration or layout without accessing concealed DIP switches or cycling power. When changes have to happen, this keeps them short, simple, and controlled—so the line can recover fast. If a defined object is moved or removed, the system halts operation to maintain safety—and with another quick key turn, coverage is updated. Enable the built-in beam tolerance feature to prevent false trips caused by minor movement of fixed objects in high-vibration environments. When using the S4BA-RFB Remote Fixed Blanking Configuration Tool with a standalone emitter/ receiver pair, a cascade cable is required—even if no additional light curtain segments are connected.





S4BA-RFB
Includes: Configuration tool, keys, and termination plug

DES4-M51-F51-D
Cable required for standalone S4B pair

EZ-SCREEN LS Type 4 Heavy-Duty Light Curtains

The LS is a full-feature family of light curtains providing greater capabilities for cascading, blanking, EDM and more.

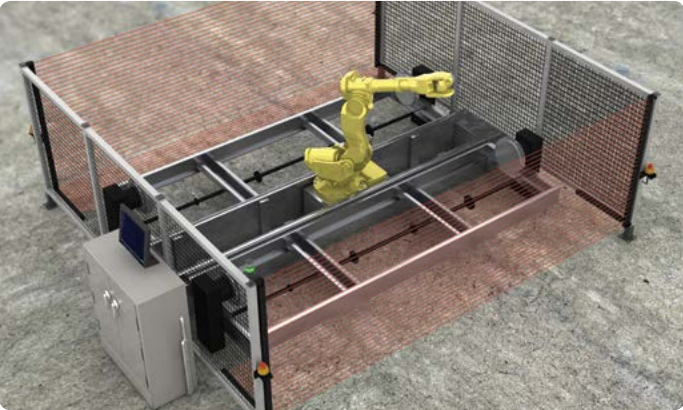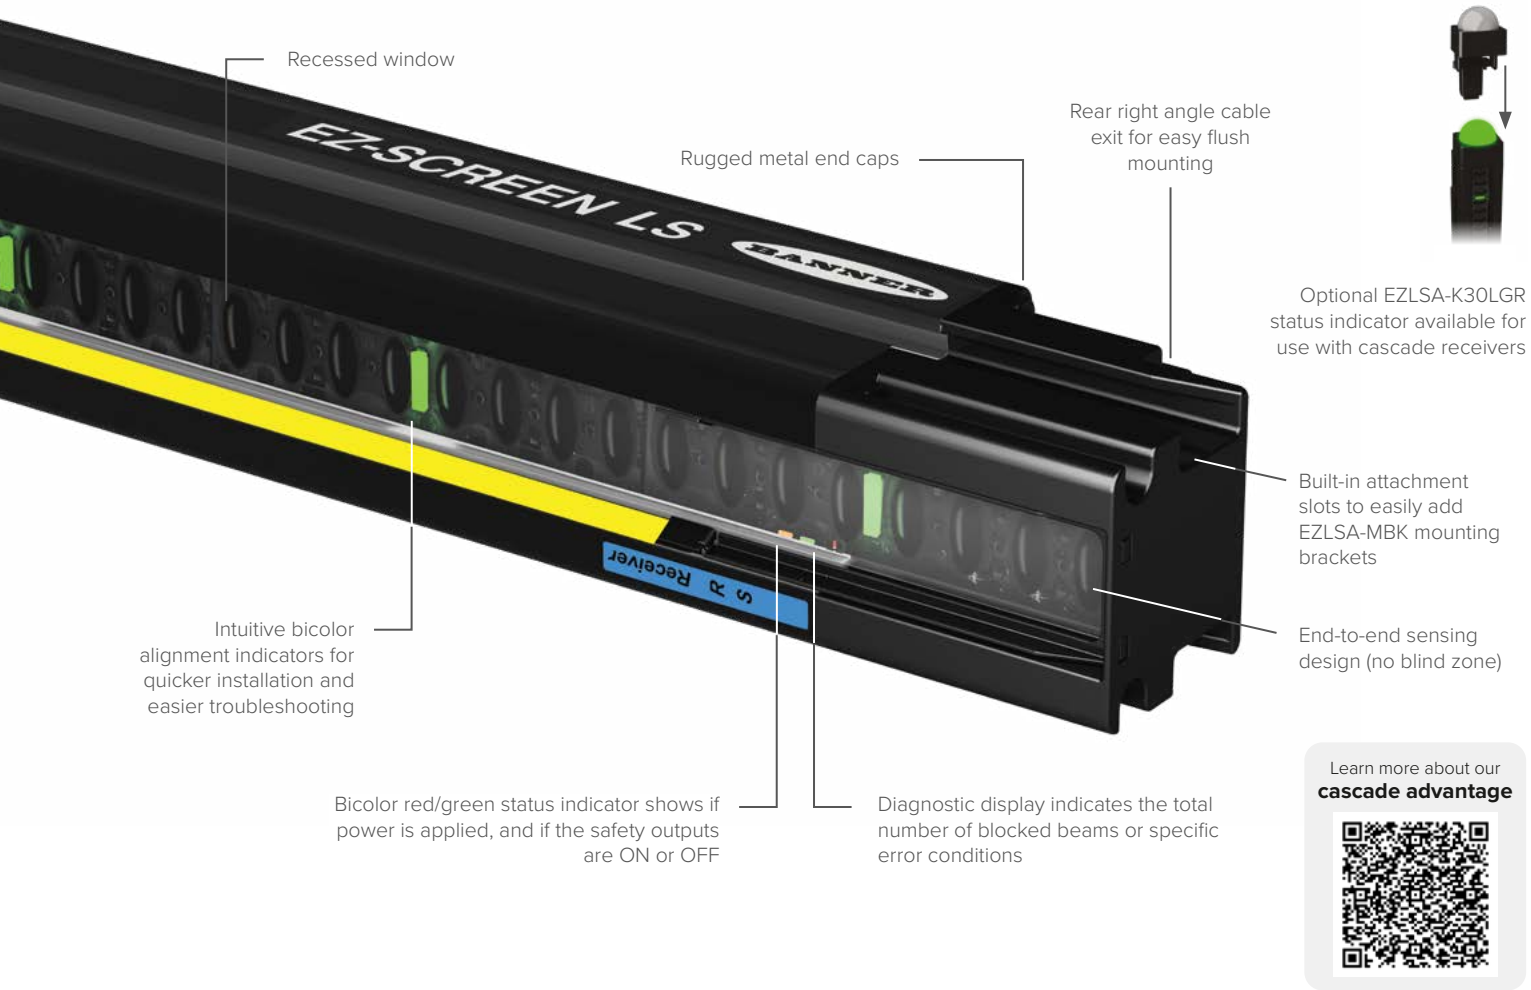

Due to its robust design, the EZ-SCREEN LS is the perfect fit in large robotic cell applications that require sturdy safety devices and heavy duty enclosures.



EZ-SCREEN LS light curtains in hygienic tubular enclosures successfully protect operators from injury and remain hygienic for easy cleaning procedures.

1. Select Emitter, Receiver, or Pair

| Family | Cascade | System Type | Resolution | Defined Area | | Termination |
|---|---------|---|---|--|---|---|
| SLL | | E | 14 | — | 910 | S |
| Blank = Standard C = Cascade | | E = Emitter only R = Receiver only P = Pair (Emitter and Receiver) | 14 = 14 mm 23 = 23 mm 40 = 40 mm | 280 = 280 mm* 350 = 350 mm 420 = 420 mm 490 = 490 mm 560 = 560 mm 630 = 630 mm 700 = 700 mm 770 = 770 mm 840 = 840 mm | 910 = 910 mm 980 = 980 mm 1050 = 1050 mm 1120 = 1120 mm 1190 = 1190 mm 1260 = 1260 mm 1330 = 1330 mm 1400 = 1400 mm 1470 = 1470 mm | 1540 = 1540 mm 1610 = 1610 mm 1680 = 1680 mm 1750 = 1750 mm 1820 = 1820 mm 1960L = 1960 mm** 2100L = 2100 mm** 2380L = 2380 mm** |

S = emitter or receiver only (LS bracket(s) and LS cordset(s) ordered separately)
P5 = Emitter or receiver includes one LS M12 double ended cordset (5-pin) and LS brackets (-11 and -12)
P55 = Pair includes two LS M12 double ended cordsets (5-pin) and LS brackets (-11 and -12)
P8 = Emitter or receiver includes one LS M12 double ended cordset (8-pin) and LS brackets (-11 and -12)
P88 = Pair includes two LS M12 double ended cordsets (8-pin) and LS brackets (-11 and -12)
Blank = Emitter, receiver or pair includes LS brackets (-11 and -12), LS cordset ordered separately

2. Add LS Brackets (for "-S" termination)

| | | | |
|--|--|---|---|
|  |  |  |  |
| EZLSA-MBK-11 | EZLSA-MBK-12 | EZLSA-MBK-16 | EZLSA-MBK-20 |
| <ul style="list-style-type: none">• End mount slotted steel bracket• Rotation: 360° in 23° increments• Includes two brackets• Slotted mounting holes spaced 20 mm on-center | <ul style="list-style-type: none">• Center mount steel bracket• Rotation: +/- 15°• Includes one bracket• Use with EZLSA-MBK-11/-20 with a max of 980 mm unsupported | <ul style="list-style-type: none">• Side mount die-cast bracket• Rotation: +15° and -20°• Includes one bracket• Use one or multiple with a max of 980 mm unsupported | <ul style="list-style-type: none">• End mount universal steel bracket• Rotation: 360° in 23° increments• Includes two brackets• Universal mounting slots |

3. Add LS Cordsets (for "-S" or "Blank" termination)

| | | |
|---|---|---|
|  |  |  |
| LS-Custom to M12 Double Ended | Single Ended LS-Custom to Flying Leads | Double-Ended RD to RD Cordsets for Cascade Systems |
| DELSE-51D (5-Pin) 0.3 m (1') | RDLS-515D (5-Pin) 4.6 m (15') | DELS-111E 0.3 m (1') |
| DELSE-81D (8-Pin) 0.3 m (1') | RDLS-815D (8-Pin) 4.6 m (15') | DELS-113E 1 m (3.3') |
| | RDLS-825D (8-Pin) 8 m (26') | DELS-1115E 4.6 m (15.1') |
| | RDLS-850D (8-Pin) 15.3 m (50') | |

IP69 Hygenic

Family

EZLSA-HTE

System Type

R

Resolution

23

Defined Area

910

Termination

E = Emitter
R = Receiver

23 = 23 mm

280 = 280 mm*
350 = 350 mm
420 = 420 mm
490 = 490 mm
560 = 560 mm
630 = 630 mm

700 = 700 mm
770 = 770 mm
840 = 840 mm
910 = 910 mm
980 = 980 mm
1050 = 1050 mm

*Not available with remote fixed blanking option

Blank = 7.6 m, 8-wire high durometer PVC cordset
F = Remote Fixed Blanking Receiver model with additional 7.6 m cordset for blanking configuration

Brackets

EZLSA-MBK-HTE-1

Stamped stainless steel bracket
360° rotation for IP69 enclosure models
Two brackets per optional kit

EZLSA-MBK-HTE-2


Hygienic stainless steel bracket
360° rotation for IP69 enclosure models
Two brackets per optional kit

Mute Arm Kits


Create a turn-key muting solution for your EZ-SCREEN LS Safety Light Curtain

With a 300 mm (1 ft) PVC cable with a 8-pin M12 male quick disconnect


Needs EZ-SCREEN LS Hardware Adaptor Kit EZLSA-MCB-HW

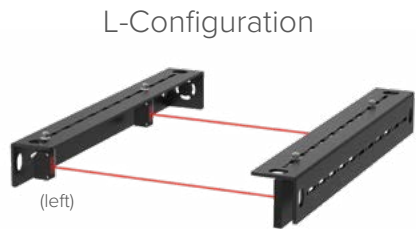


SGSA-ML-L-LPQ20
Includes 2 mute arms, 2 SGSA-Q20PLPQ5 mute sensors, and 2 retroreflectors

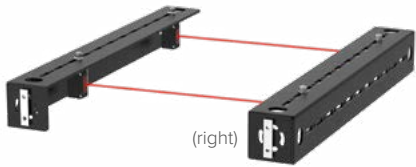

SGSA-ML-R-LPQ20
Includes 2 mute arms, 2 SGSA-Q20PLPQ5 mute sensors, and 2 retroreflectors

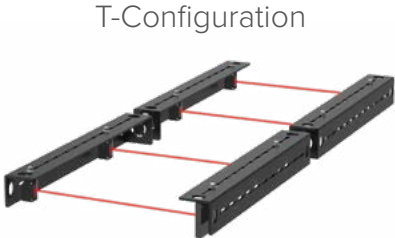


SGSA-MT-LPQ20
Includes 4 mute arms, 4 SGSA-Q20PLPQ5 mute sensors, and 4 retroreflectors

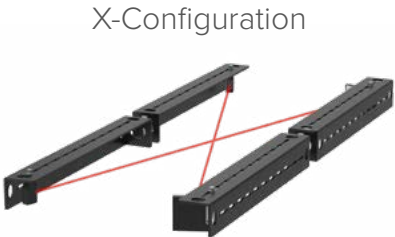

SGSA-MX-LPQ20
Includes 4 mute arms, 2 SGSA-Q20PLPQ5 mute sensors, and 2 retroreflectors

Muting System Diagram

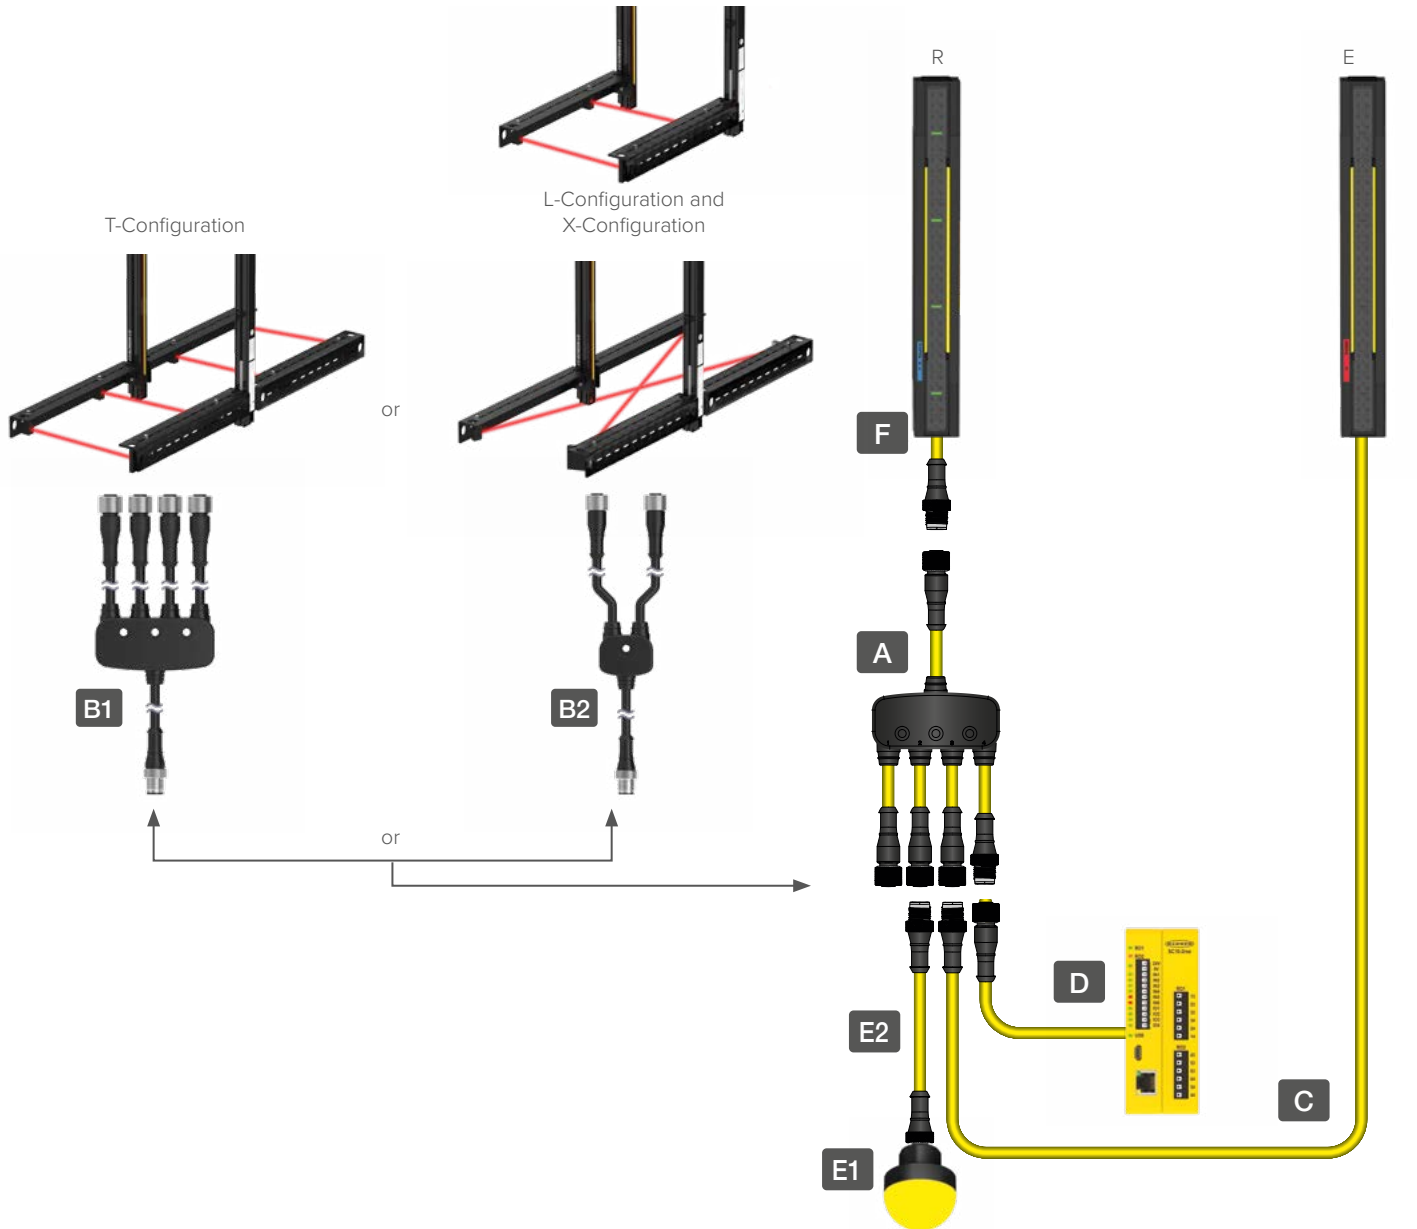

| Connection Cables | | Mute Lights and Cables | |
|-------------------|---|---------------------------------|--|
| A | CSM4-M1281M1251M1281 LS muting connection cable | E1 | TL50WQ, TL50YQ, K50LWXXPQ, K50LYXXPQ Mute lights (xx is the length in feet) |
| B | SGS mute arm kit connection cable (select one) B1: T-Muting: CSA4-M1251M1251M1251M1251 B2: L-Muting or X-Muting: CSA-M1241M1241 | E2 | DEE2R-5xx Mute light cable (xx is the length in feet) |
| C | DEE2R-8xxD LS emitter connection cable (xx is the length in feet) | Interface options | |
| D | QDEG-12xxE Safety controller connection cable (xx is the length in feet) | Interface Modules (see page 46) | |
| F | DELSE-81D (8-Pin) LS receiver connection cable (M12) | | |

EZ-SCREEN 14/30 Type 4 Light Curtains

Banner's traditional light curtain, the EZ-Screen 14/30 provides the longest sensing range, reduced resolution, and includes trip or latch/reset functionality.



Learn more about our
cascade advantage

1. Select Emitter and Receiver


| Family | Cascade | System Type | Resolution | Defined Area | | Finish | Termination |
|--|----------|--|--|---|--|--------|-------------|
| SLS | C | P | 14 | — | 150 | | Q88 |
| C = Cascade Blank = No cascading | | E = Emitter R = Receiver P = Pair | 14 = 14 mm 30 = 30 mm | 150 = 150 mm* 300 = 300 mm 450 = 450 mm 600 = 600 mm 750 = 750 mm 900 = 900 mm 1050 = 1050 mm 1200 = 1200 mm | 1350 = 1350 mm 1500 = 1500 mm 1650 = 1650 mm 1800 = 1800 mm 1950 = 1950 mm** 2100 = 2100 mm** 2250 = 2250 mm** 2400 = 2400 mm** | | |
| <p>*Not available in cascade models **Only available in 30 mm resolution</p> <p>Blank = Yellow powder coat N = Nickel-plated ESD (ESD-safe models are not available with pigtail QD) A = Clear anodized aluminium</p> | | | | | | | |
| <p>Q8 = 8-pin M12 QD (individual Emitter or Receiver models) P8 = 8-pin M12 pigtail QD (individual Emitter or Receiver models) Q88 = For Pair – Emitter with 8-pin M12 QD, Receiver with 8-pin QD P88 = For Pair – Emitter with 8-pin M12 pigtail QD, Receiver with 8-pin M12 pigtail QD</p> | | | | | | | |

2. Add Brackets

| | | | |
|---|---|--|--|
| | | | |
| EZA-MBK-11 <ul style="list-style-type: none">Standard mounting L-bracket | EZA-MBK-12 <ul style="list-style-type: none">Center mounting bracket | EZA-MBK-20 <ul style="list-style-type: none">Retrofit bracket for mounting to engineered/slotted aluminum framing | EZA-MBK-21 <ul style="list-style-type: none">Mounting bracket system for L configuration of two cascaded light screensOne EZA-MBK-21 kit contains brackets for one side of an L-mounting configuration |

EZ-SCREEN LP Type 4 Compact Light Curtains

Banner's compact full-feature family of light curtains providing capabilities for cascading, blanking, integral muting, latch/reset, EDM, and more.

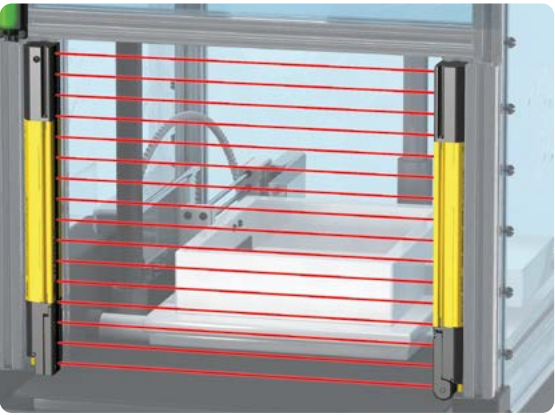

The EZ-SCREEN LP safety light screen is compact and mounts in tight spaces with its continual end-to-end sensing that leaves no gaps.

1. Select Emitter and Receiver

EZ Screen LP

| Family | Cascade | System Type | Resolution | Defined Area | | Termination |
|--|---|--|--------------------------|--|--|-------------|
| SLP | C | P | 14 | — | 410 | P88 |
| | C = Cascade* Blank = Standard VA = LP Basic | P = Pair (Emitter and Receiver) E = Emitter only R = Receiver only | 14 = 14 mm 25 = 25 mm | 270 = 270 mm** 410 = 410 mm 550 = 550 mm 690 = 690 mm | 830 = 830 mm* 970 = 970 mm* 1110 = 1110 mm* 1250 = 1250 mm* | |
| Note: LP Basic contains individual emitter and/or receiver only. Brackets and cordset ordered separately | | | | | | |
| P8 = 300 mm 8-Pin M12 pigtail QD (individual Emitter or Receiver models) P88 = 300 mm 8-Pin M12 pigtail QD (on BOTH Emitter and Receiver models) Blank = no pigtail, RD connection (for RDLP-8..D cordset) | | | | | | |
| *8-pin connection required for cascade models and to enable EDM, Aux Output and Reset features **Not available in cascade models *Not available in LP Basic models | | | | | | |

EZ Screen LP with Muting

| Family | Resolution | Defined Area | | Finish | Termination |
|--|--------------------------|--|--|---|---|
| SLPMP | 14 | — | 410 | | |
| SLPE = Emitter SLPMR = Receiver SLPMP = Pair | 14 = 14 mm 25 = 25 mm | 410 = 410 mm 550 = 550 mm 690 = 690 mm 830 = 830 mm | 970 = 970 mm 1110 = 1110 mm 1250 = 1250 mm | Blank = Yellow powder coat N = Nickel-plated ESD A = Clear anodized aluminium | Blank = Integral Removable Disconnect P8 = 8-pin pigtail QD (SLPE) P12 = 12-pin pigtail QD (SLPMR) P128 = For SLPMP (Pair) Emitter with 8-pin M12 pigtail QD Receiver with 12-pin M12 pigtail QD |

2. Add Brackets

| | | | | | |
|--|--|---|--|--|---|
| | | | | | |
| LPA-MBK-10 | LPA-MBK-11 | LPA-MBK-12 | LPA-MBK-16 | LPA-MBK-21 | LP-Custom to M12 Male QD |
| <ul style="list-style-type: none">End mount bracketRotation: 40°Includes 2 brackets and hardware14 ga. steel, black zinc-plated | <ul style="list-style-type: none">Standard end mount bracketRotation: 360°Includes 2 brackets and hardware14 ga. steel, black zinc-plated | <ul style="list-style-type: none">Standard side mount bracketRotation: +10° and -30°Includes 1 bracket and hardware14 ga. steel, black zinc-plated | <ul style="list-style-type: none">Side mount bracketRotation: +15° and -20°Includes 1 bracket and hardwareBlack zinc die-cast | <ul style="list-style-type: none">Pivoting cascade mounting bracketIncludes 2 brackets and hardware14 ga. steel, black zinc-plated | <ul style="list-style-type: none">DELPE-51D (5-pin) 0.3 m (1 ft)DELPE-81D (8-pin) 0.3 m (1 ft) |

3. Add Cordsets

EZ-SCREEN LS2 Type 2 Light Curtains





Designed for lower-risk applications such as bump or bruise, knock-down, trapping but not crushing, or minor cuts and abrasions.



1. Select Emitter and Receiver


| Family | System Type | Resolution | Defined Area | | Termination |
|--------|---|------------|--|--|--|
| LS2 | TP | 30 | — | 150 | Q88 |
| | E = Emitter TR = Trip Receiver TP = Trip Pair LR = Latch Receiver LP = Latch Pair | 30 = 30 mm | 150 = 150 mm 300 = 300 mm 450 = 450 mm 600 = 600 mm 750 = 750 mm 900 = 900 mm | 1050 = 1050 mm 1200 = 1200 mm 1350 = 1350 mm 1500 = 1500 mm 1650 = 1650 mm 1800 = 1800 mm | Q8 = 8-pin QD (individual Emitter or Receiver models) Q88 = For pair: Emitter with 8-pin M12 QD, Receiver with 8-pin M12 QD |

2. Add Brackets

| | | | |
|---|--|---|---|
|  |  |  |  |
| USMB-5 <ul style="list-style-type: none">Retrofit mounting bracket2.3 mm thickness, black zinc-plated, chromate dip finishMounting hardware included: 1 kit required per emitter or receiver | USMB-6 <ul style="list-style-type: none">Universal mounting bracket kit2.3 mm thickness, black zinc-plated, chromate dip finishMounting hardware included: 1 kit required per emitter or receiver | USMB-8 <ul style="list-style-type: none">Low profile mounting plate for 90° sensor directionBlack anodized aluminumUses two M4 screws (user supplied) for through-hole mounting1 kit required per emitter or receiver | 8-Pin M12 with Flying Leads <ul style="list-style-type: none">QDE-815D 4.5 m (15')QDE-825D 7.6 m (25')QDE-850D 15.2 m (50') |





The Type 2 EZ-SCREEN safety light screen protects hands and fingers from being bumped, bruised, or pinched by the moving parts of a carousel.

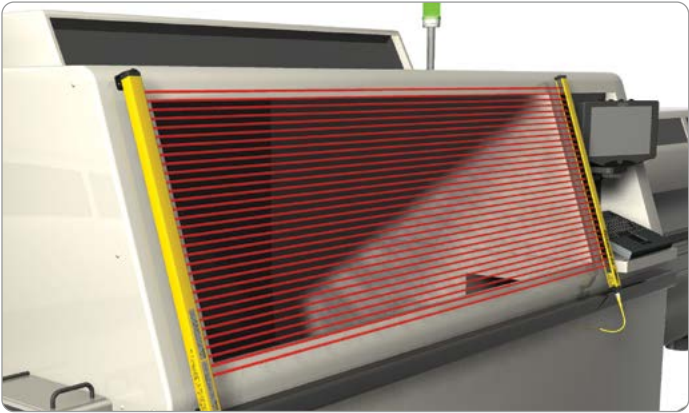

The Type 2 EZ-SCREEN safety light screen guards the opening to a chip shooter, which has moving parts that can cause painful but usually temporary injuries.

SGS Type 4 Safety Light Grids

Two to four beam Type 4 safety light grids protect personnel from injury and machines from damage by guarding access, areas, and perimeters. Able to detect a body in a cost-effective and heavy-duty safety light curtain package.

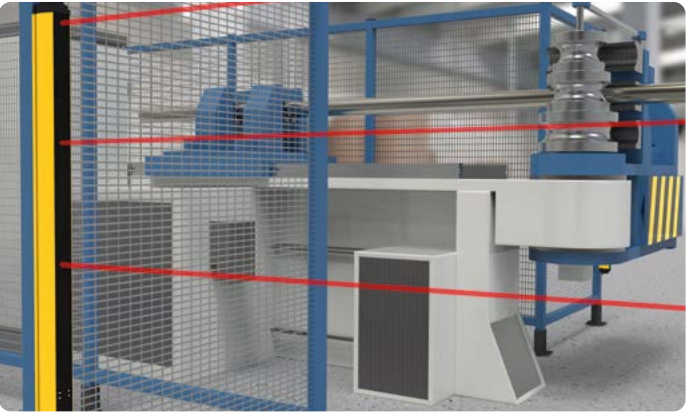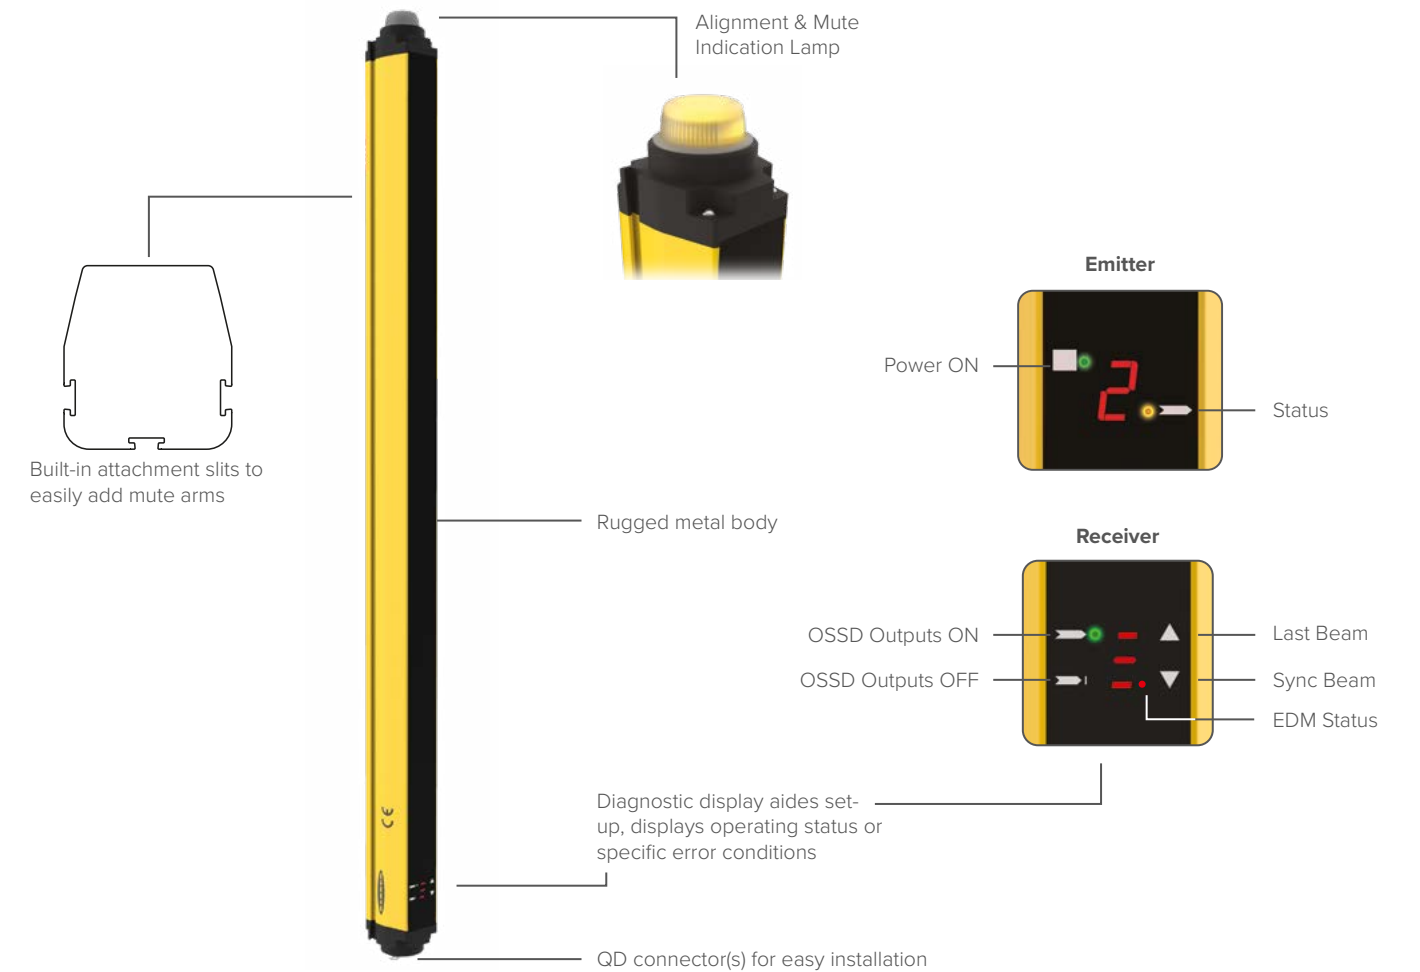

SGS Safety Grid Systems, with two, three, or four beams, are used to monitor the perimeter of the work area.



SGS Safety Grid Systems are available in Emitter/Receiver models capable of safeguarding over very long distances and in easy-to-deploy Active/Passive models.

SGS Emitter/Reveiver

- When compared to higher resolution light screens, a lower cost option for body detection applications
- Available with integral muting
- Long range, up to 60 m

| Type | Range (m) | Integral Muting | Protective Height (mm) | Models |
|--------------------|-----------|-----------------|------------------------|----------------|
| Emitter & Receiver | 6 to 60 | No | 500 (2 beams) | SGSXP2-500Q88 |
| | | | 800 (3 beams) | SGSXP3-400Q88 |
| | | | 900 (4 beams) | SGSXP4-300Q88 |
| | | | 1200 (4 beams) | SGSXP4-400Q88 |
| | 0.5 to 30 | No | 500 (2 beams) | SGSSP2-500Q88 |
| | | | 800 (3 beams) | SGSSP3-400Q88 |
| | | | 900 (4 beams) | SGSSP4-300Q88 |
| | | | 1200 (4 beams) | SGSSP4-400Q88 |
| | 0.5 to 30 | Yes | 500 (2 beams) | SGSMP2-500Q128 |
| | | | 800 (3 beams) | SGSMP3-400Q128 |
| | | | 900 (4 beams) | SGSMP4-300Q128 |
| | | | 1200 (4 beams) | SGSMP4-400Q128 |

SGS Active/Passive

- Active transceiver contains emitter and receiver
- Reduces overall wiring costs
- Available with integral muting
- Up to 8 m range

The image shows a diagram and two photographs of sensor components. On the left, a diagram illustrates an 'Active Transceiver' (labeled 'A') and a 'Passive Mirror' (labeled 'P'). Red arrows indicate the transceiver's range-finding mechanism: one arrow points from the transceiver to the mirror, and another points from the mirror back to the transceiver. To the right of the diagram are two photographs of the physical components. The first is a black cylindrical 'Active Transceiver' with a yellow band near the bottom. The second is a yellow cylindrical 'Passive Mirror' with a black band near the bottom.


| Type | Range (m) | Muting | Protective Height (mm) | Models |
|-------------------------|--|------------------------|------------------------|----------------------|
| Active Transceiver | 0.5 to 8 | No | 500 (2 beams) | SGSSA2-500Q8 |
| | | | 800 (3 beams) | SGSSA3-400Q8 |
| | | | 900 (4 beams) | SGSSA4-300Q8 |
| | | | 1200 (4 beams) | SGSSA4-400Q8 |
| | 0.5 to 8 | Yes | 500 (2 beams) | SGSMA2-500Q12 |
| | | | 800 (3 beams) | SGSMA3-400Q12 |
| | | | 900 (4 beams) | SGSMA4-300Q12 |
| | | | 1200 (4 beams) | SGSMA4-400Q12 |
| Passive Mirror | | | | |
| Type | Range (m) | Protective Height (mm) | Models | |
| Passive Mirror Assembly | Pair with Active Transceivers with matching beams and protective heights | 500 (2 beams) | SGSB2-500 | |
| | | 800 (3 beams) | SGSB3-400 | |
| | | 900 (4 beams) | SGSB4-300 | |
| | | 1200 (4 beams) | SGSB4-400 | |

Mute Arm Kits

Preassembled (with mounting hardware) for plug-and-play connection to the SGS grid and LS Safety Light Curtains

- Wiring connection block or cable accessories available
- Adjusts easily for line changes
- Hardware kit to attach mute arms to LS curtains, EZLSA-MCB-HW, ordered separately from mute arm kits

L-Configuration

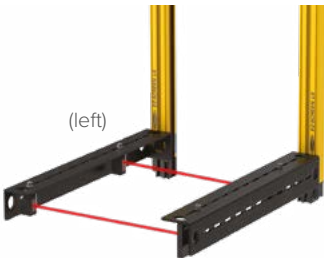

SGSA-ML-L-LPQ20

Includes 2 mute arms, 2 SGSA-Q20PLPQ5 mute sensors, and 2 retroreflectors

T-Configuration



SGSA-MT-LPQ20


Includes 4 mute arms, 4 SGSA-Q20PLPQ5 mute sensors, and 4 retroreflectors

X-Configuration



SGSA-MX-LPQ20

Includes 4 mute arms, 2 SGSA-Q20PLPQ5 mute sensors, and 2 retroreflectors

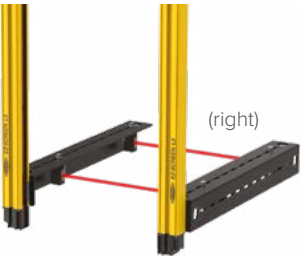

SGSA-ML-R-LPQ20

Includes 2 mute arms, 2 SGSA-Q20PLPQ5 mute sensors, and 2 retroreflectors



Integral muting models have muting technology built into the device eliminating the need for an external muting controller. Preassembled muting arm kits are available in T, L and X configurations. The muting kits use premounted hardware and Q20 retroreflective sensors and reflectors.

Benefits of Muting

- Maintain high safety standards while allowing for a predetermined object to break a beam
- Limit downtime by not unnecessarily shutting down a conveyor or robot cell

Applications

- Assembly and packaging machines
- Automated production equipment
- Robotic work cells
- Automated warehouses
- Palletizers

Mute Connection Options

| Description | Models |
|---|-------------|
| Connection box for X, L or T mute arm kits | SGSA-MCB |
| Connection cable for X and L mute arm kits | SGSA-MCS-2 |
| Connection cable for T mute arm kits | SGSA-MCS-4 |
| Optional hardware kit for mounting mute connection box, or mute connection cable to the t-slot of SGS Receiver or Active Unit | SGSA-MCB-HW |

Stands and Corner Mirrors



| SGSA-S Series Enclosures | | | | | |
|--------------------------|--------------|------------------|--------------------------------------|------------------------|--|
| Fits SGS Models | # of Windows | Enclosure Height | Distance from Floor to Bottom Window | Distance between Beams | Enclosure Models |
| SGS..4-300Q.. | 4 | 1543 mm (60.75") | 300 mm (11.8") | 300 mm (11.8") | SGSA4-S300 SGSA4-S300-M SGSA3-S400 SGSA3-S400-M |
| SGS..3-400Q.. | 3 | 1238 mm (48.78") | 300 mm (11.8") | 400 mm (15.8") | SGSA4-S400 SGSA4-S400-M SGSA2-S500 SGSA2-S500-M |
| SGS..4-400Q.. | 4 | 1618 mm (63.69") | 300 mm (11.8") | 400 mm (15.8") | |
| SGS..2-500Q.. | 2 | 1035 mm (40.75") | 400 mm (15.8") | 500 mm (19.7") | |



| SSM Series Corner Mirrors | | | | |
|---------------------------|-----------------|-----------------|-----------------|---------------|
| Fits SGS Models | Reflective Area | Mounting Area | Mirror Height | Mirror Models |
| SGS..2-500.. | 550 mm (21.7") | 661 mm (26.0") | 628 mm (24.7") | SSM-550 |
| SGS..3-400.. | 825 mm (32.5") | 936 mm (36.9") | 903 mm (35.6") | SSM-825 |
| SGS..4-300.. | 975 mm (38.4") | 1086 mm (42.8") | 1053 mm (41.5") | SSM-975 |
| SGS..4-400.. | 1275 mm (50.2") | 1386 mm (54.6") | 1353 mm (53.3") | SSM-1275 |



| MSA Series Stands | | |
|-------------------|---------------------|--------------|
| Pole Height | Usable Stand Height | Stand Models |
| 1676 mm (66") | 1550 mm (61") | MSA-S66-1 |
| 2134 mm (84") | 2007 mm (79") | MSA-A84-1 |
| 2667 mm (105") | 2667 mm (100") | MSA-S105-1 |

Cables



8-Pin M12 with Flying Leads

QDE-815D
4.5 m (15')
QDE-825D
7.6 m (25')
QDE-850D
15.2 m (50')



12-Pin M12 with Flying Leads



QDE-1215E
4.5 m (15')
QDE-1225E
7.6 m (25')
QDE-1250E
15.2 m (50')




Brackets



SA-MBK-10-4
End-mount bracket

Safety Scanner Selection Guide


| | | |
|---|---|---|
| |  |  |
| | SX5-B6 | SX5-M10 |
| | p. 32 | p. 32 |
| Dimensions W x D x H (mm) | 102 x 112 x 152 | 102 x 112 x 152 |
| Presence Detection | 50/70 mm | 50/70 mm |
| Body Detection | 70/150 mm | 70/150 mm |
| Hand Detection | 30/40 mm | 30/40 mm |
| Range (depending on resolution) | 30 mm = 2.5 m 40 mm = 3 m 50 mm = 4 m 70/150 mm = 5.5 m | 30 mm = 2.5 m 40 mm = 3 m 50 mm = 4 m 70/150 mm = 5.5 m |
| Max. Zone Sets (depending on configuration) | 6 | 10 |
| Master Remote | Master (up to 3 remotes) | |
| Removable Memory | | SXA-RM-10 |
| Speed Monitoring | | |
| Max. OSSD Outputs (depending on configuration) | 1x 2 OSSD | 2x 2 OSSD |
| Inter Device Connection | | 8-Pin M12 |
| Integral Muting | ✓ | ✓ |
| Programmable Dust Filter | ✓ | ✓ |
| Measurement Data | ✓ | ✓ |
| Field-replaceable Window | ✓ | ✓ |
| Muting/bypass | | |

| | | |
|---|---|---|
|  |  |  |
| SX5-M70 | SX5-ME70 | SX5-R |
| p. 32 | p. 32 | p. 32 |
| 102 x 112 x 152 | 102 x 112 x 152 | 102 x 112 x 152 |
| 50/70 mm | 50/70 mm | 50/70 mm |
| 70/150 mm | 70/150 mm | 70/150 mm |
| 30/40 mm | 30/40 mm | 30/40 mm |
| 30 mm = 2.5 m 40 mm = 3 m 50 mm = 4 m 70/150 mm = 5.5 m | 30 mm = 2.5 m 40 mm = 3 m 50 mm = 4 m 70/150 mm = 5.5 m | 30 mm = 2.5 m 40 mm = 3 m 50 mm = 4 m 70/150 mm = 5.5 m |
| 70 | 70 | depending on master |
| Master (up to 3 remotes) | Master (up to 3 remotes) | Remote |
| SXA-RM-70 | SXA-RM-70 | |
| | ✓ | |
| 3x 2 OSSD | 3x 2 OSSD | |
| 8-Pin M12 | 8-Pin M12 | 8-Pin M12 |
| ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ |
| ✓ | ✓ | |

Safety Scanner System

Horizontal or vertical monitoring of both personnel and stationary or mobile systems

SX Series safety laser scanners protect personnel, equipment, and mobile systems by continuously scanning a user-defined area of up to 275° to create a two-dimensional protected zone.

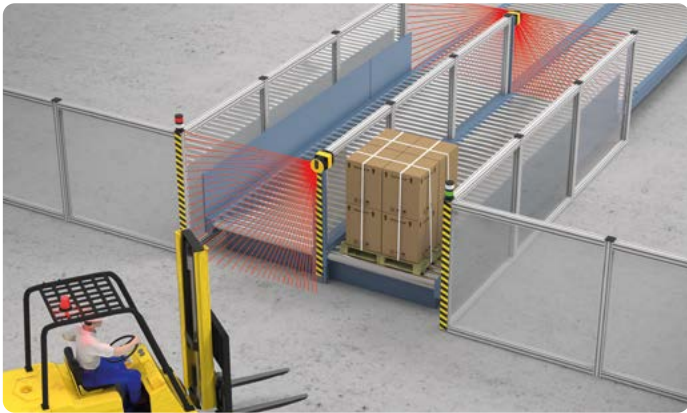

SX5 software configuration allows zone switching for full, right-side and left-side safety protection during this forklift access application.




Software interface makes it easy to create custom safety and warning zones to safeguard large, complex, and irregularly shaped areas.

Increased Machine Uptime


The SX5 has on-board LED indicators and a large multi-segment color display that provide at-a-glance system status information so users can quickly identify zone breaches and resolve issues with a minimal amount of equipment downtime.



Compact, one-piece safety device installs easily above and away from area hazards without requiring time-consuming alterations to area infrastructure.

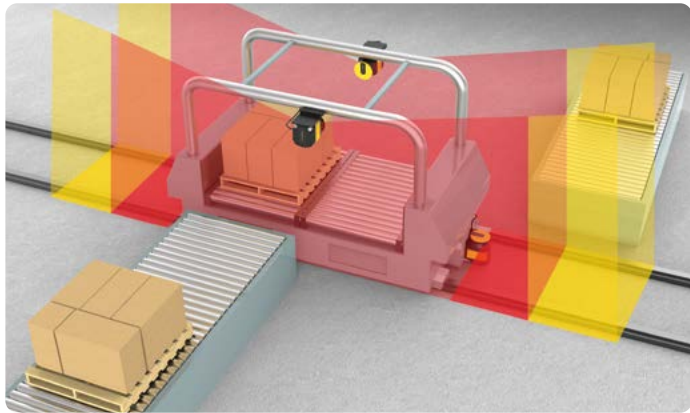

An alert is triggered if an object enters the warning zone and equipment will come to a stop if the safety zone is breached.

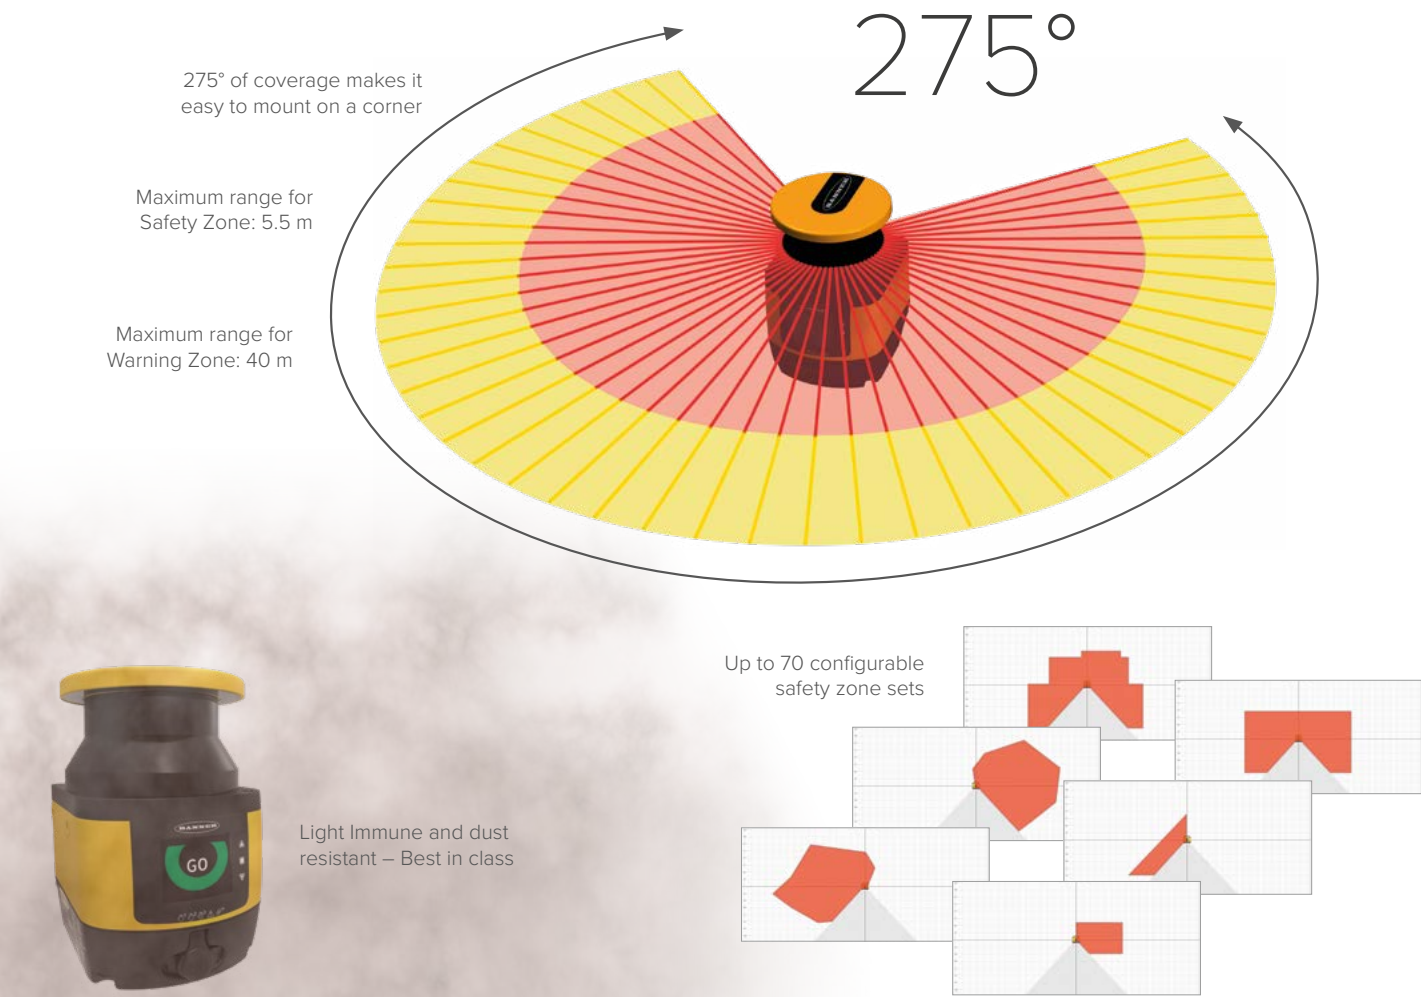

Rugged design for reliable industrial use

Numerous status, diagnostic, warning, and error displays

Dynamic Muting available and selectable detection capability for vertical applications

1

2

3

4

5

LED 1: Object Detection in Safety Zone (OSSD)

LED 2: Not Available

LED 3: Assigned to Warning Zone 2

LED 4: Assigned to Warning Zone 1

LED 5: Interlock Status (waiting for Reset)


Keypad

M12 Ethernet connector cover for standalone models

Safety Scanner System

Removable memory for fast scanner replacement


The system configuration is backed up in a removable memory unit. Install your replacement scanner fast and easy, without needing to reconfigure your system. The machine interface cables attach to this memory unit on the Master models.

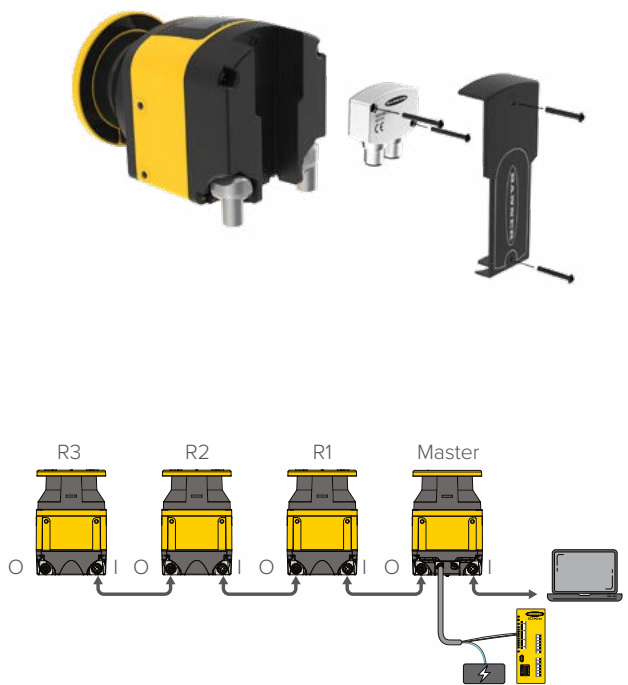

Master and Remote connection reduces wiring

For applications that require monitoring multiple sides of an AGV, up to four scanners can be easily connected through an Ethernet-based safe communications bus, working as a single system.


Each remote unit is connected to the master by a single cable that provides them with power, and the memory of the entire system is stored in the master.

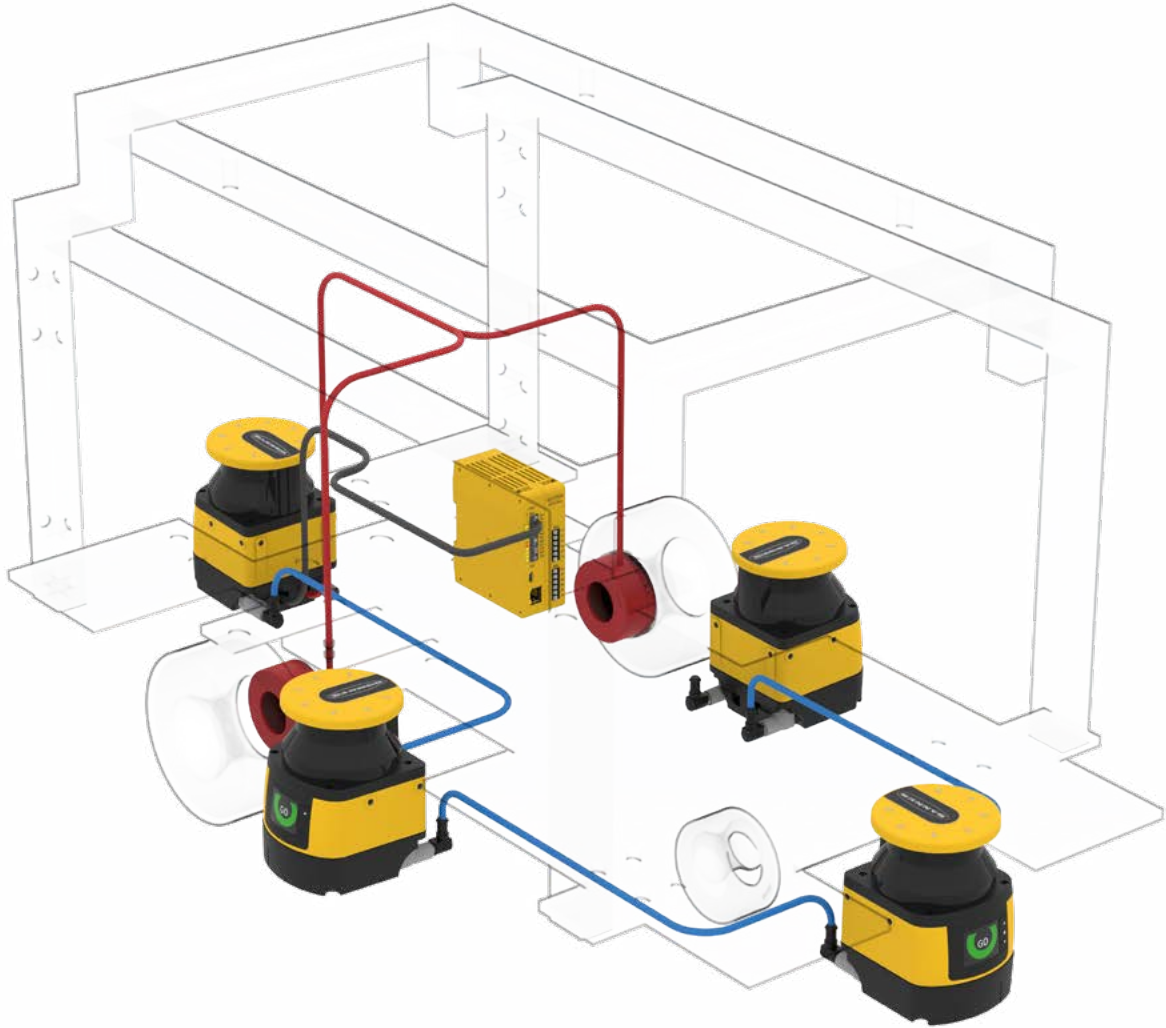

Safety Scanner Software

Simple setup for rapid deployment

The SX5 can be set up in just a few simple steps using Banner's free configuration software. This robust software features menu-driven tools that guide users through setup and make it easy to design custom safety and warning zones to accommodate existing infrastructure and meet the specific needs of any application.

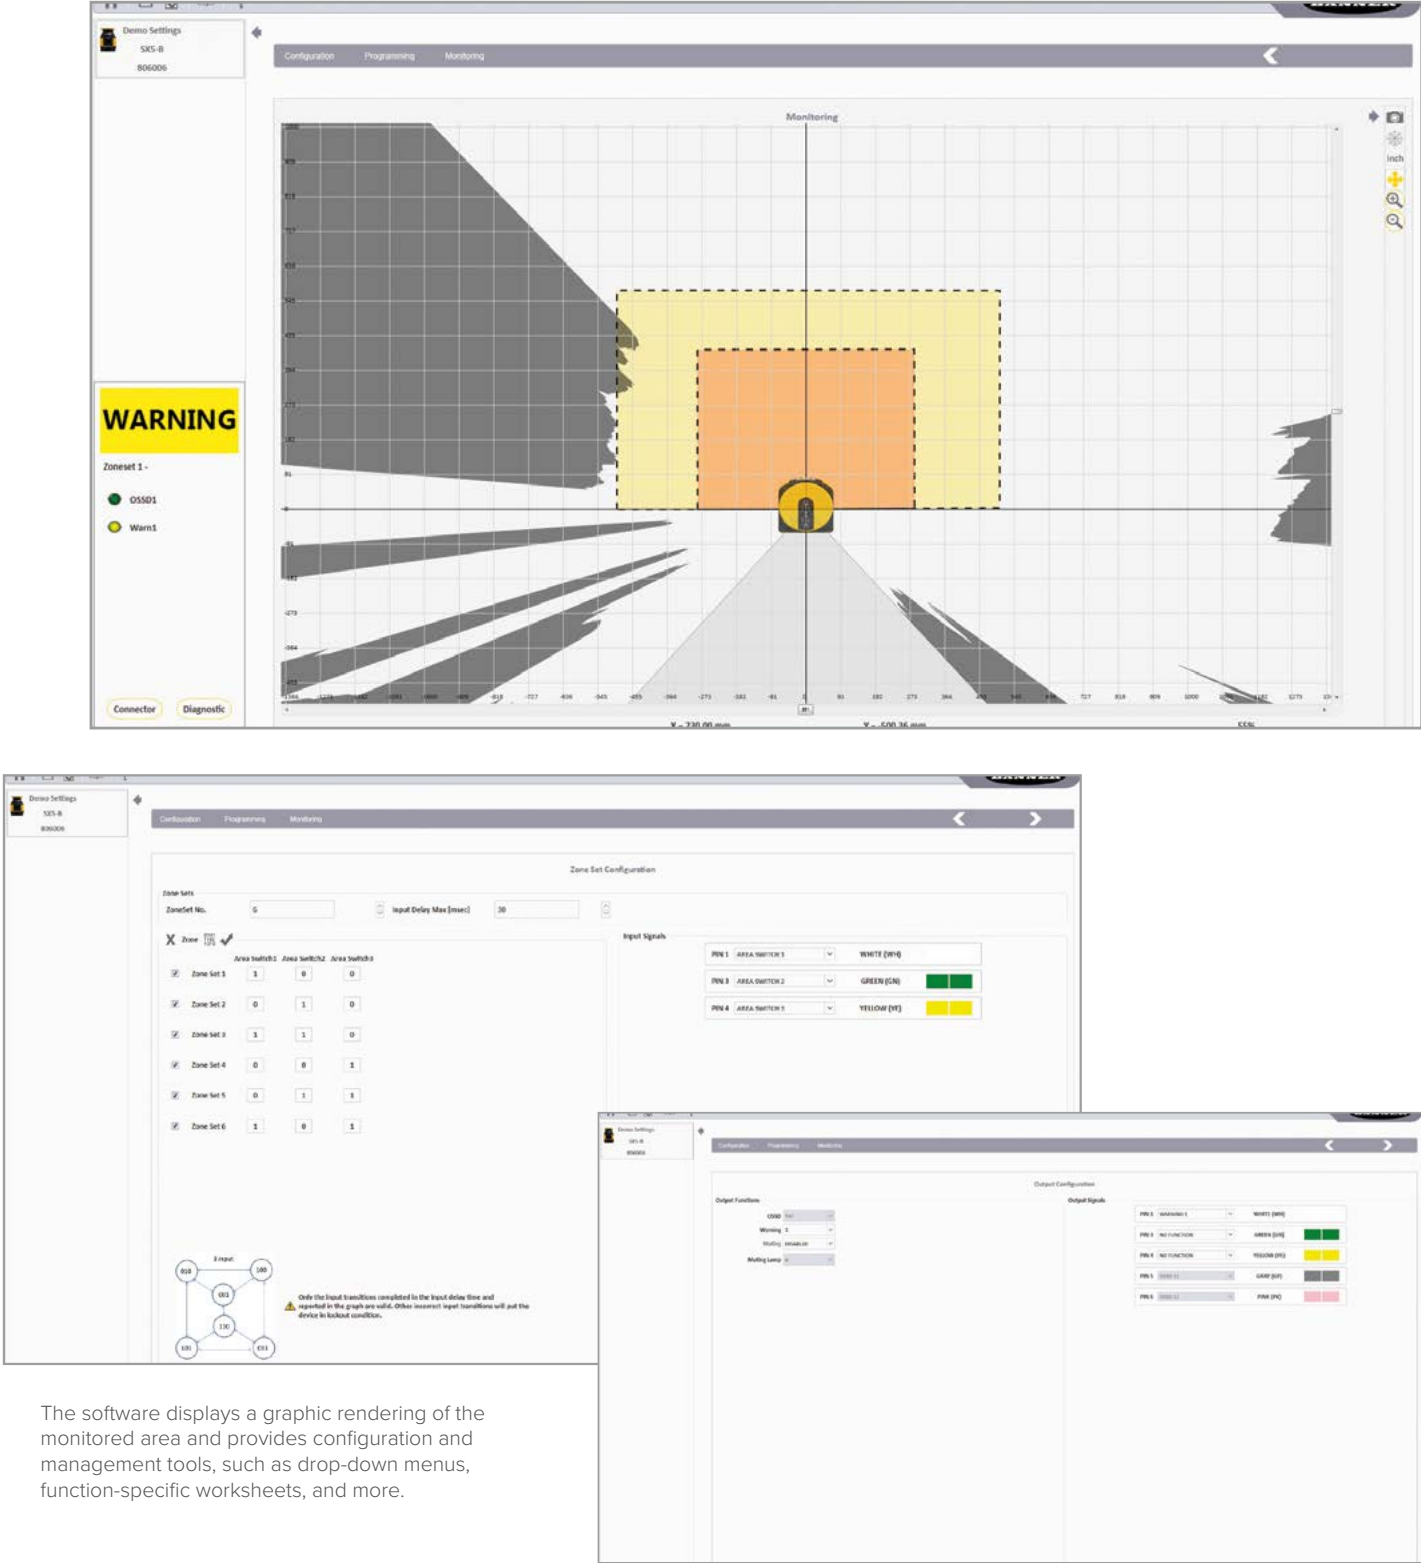

The software displays a graphic rendering of the monitored area and provides configuration and management tools, such as drop-down menus, function-specific worksheets, and more.

Safety Scanner Fixed Applications

Stationary area guarding

Stationary area guarding uses sensing fields such as safety or warning zones to continually sense an individual within a safeguarded area. Stationary area guarding can reduce or eliminate the possibility of a pass-through hazard that could result in an individual being exposed to unexpected machine startup or motion.



Single-zone safeguarding

The safety scanner detects when a person approaches a hazard. When the person enters a warning zone, the hazardous motion is controlled safely. When the person enters the safety zone, the hazard is stopped.




Multi-zone safeguarding

Up to three safety zones can be monitored simultaneously and independently. This way, safety in the entire plant is optimized, ensuring increased productivity and improved ergonomics in the entire plant.



Multi-zone safeguarding via master-remote

Manage multiple areas with master-remote architecture. Multiple safety zones stop different parts of the dangerous machine, without the need of an external controller.

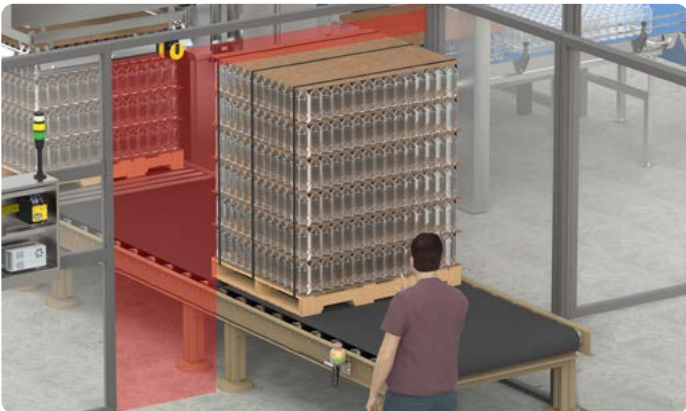


Safeguarding with dynamic and partial muting

Muting sensors can be directly connected to the SX5, creating a tightly protected area around the muted object while muting is active. Each safety output can be configured with its own muting requirements.

Safety Scanner Mobile Applications


Mobile area guarding

On mobile applications, the SX5 monitors the area directly ahead of the vehicle using both the warning and the safety zones. The vehicle slows down if something is detected in the warning zone and the vehicle stops when something is detected in the safety zone. If the speed increases or decreases, alternate zone sets can be used to adjust for varying stopping distances.

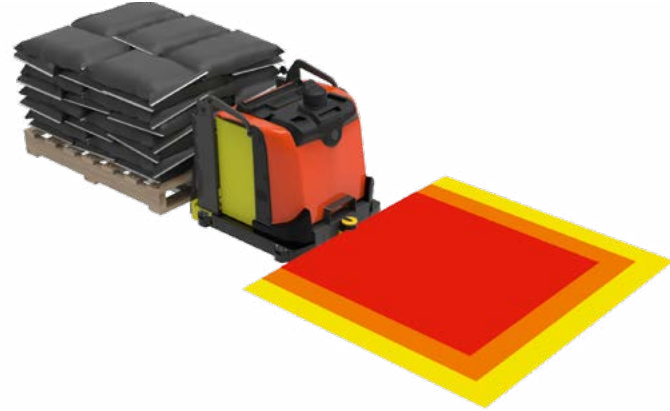


Automated guided vehicle collision avoidance

Warning and safety zones can be used to alert operators, slow down the vehicle, or stop it. Up to 70 different zones can be set and activated per position, speed and movement of the vehicle.

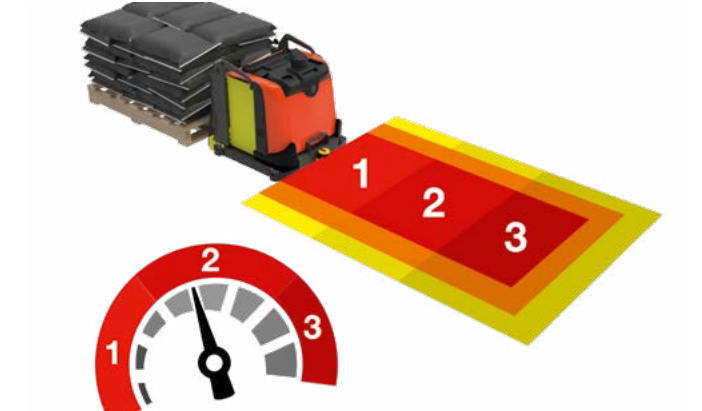


Safe speed monitoring

Incremental encoders inputs can be directly read by the SX5 scanner in order to select the appropriate slow-down and stopping areas, based on the speed of the vehicle.

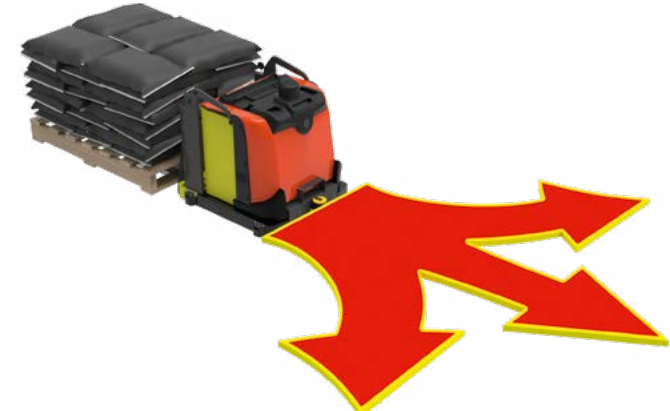

Advanced measurement data for direct navigation



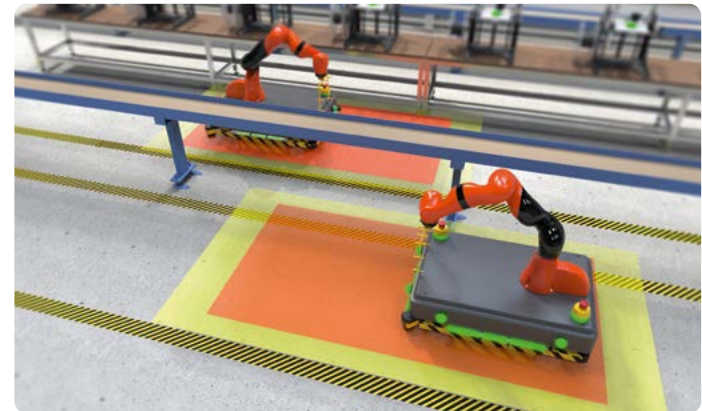






The SX5 has a direct transmission protocol over Ethernet. It can be used to read measurement data for vehicle navigation. Data includes active zone, I/O status, measured speed, intensity of beams, and diagnostic.









Collaborative robot monitoring

Mobile collaborative robots (cobots) have built-in safety features that enable them to work alongside humans. Cobots can be programmed to slow down or stop when a human enters the warning or safety zone.

Relay and Controller Selection Guide

| |  |  |  |  |  |
|---|---|---|--|---|---|
| | GM/ES | UM | SM | AT | MMD |
| | p. 40 | p. 40 | p. 40 | p. 40 | p. 40 |
| Device Type | Preconfigured Safety Relay Modules | | | | |
| Self Testing Safety Device | | ✓ | | | ✓ |
| Self Testing Safety Device with EDM Function | | ✓ | | | ✓ |
| E-Stop | ✓ | ✓ | | | ✓ (secondary function) |
| Rope Pull | ✓ | ✓ | | | ✓ (secondary function) |
| Gate Switch (potential free contacts) | ✓ | ✓ | | | ✓ |
| RFID Gate Switch (OSSD contacts) | | ✓ | | | ✓ |
| ISD Functionality | | | | | |
|    | | | | | |
|  | | | | | |
| Network Access and View | | | | | |
| Safety Mat Monitoring | | | ✓ | | |
| Two-Hand Control | | | | ✓ | |
| Enabling Device | ✓ | ✓ | | | |
| Expandable | | | | | |
| Muting | | | | | ✓ |
| ON/OFF Delay | | | | | |
| Speed Monitoring | | | | | |
| Safety Standard | Cat. 4 PL e, per EN ISO 13849-1; SIL 3 per IEC 61508 and IEC 62061 | | | | |
| Inputs | 1 NC and 1 NO (single or dual) 1 NC (single) 2 NC (dual) | 1 NC (single) or 2 NC (dual) or 2 PNP | 1 (or multiple in series) 4-wire safety mat | 2 STB or buttons with complementary contacts | 2 NC mutable (dual) and 2 NC SSI (dual) |
| Safety Outputs | 2 NO, 3 NO, 4 NO | 2 NO or 3 NO | 4 NO | 2 NO | 2 PNP OSSD or 2 NO |
| Maximum Safety Output Rating | 6A, 7A | 7A | 6A | 6A | 6A |
| Auxiliary Outputs | 1 NC or 1 NC and 2 PNP | 1 NC, depending on model | 1 NC and 2 PNP | | 1 PNP or 1 NC |
| Power Supply | 24 V AC/DC 115 V AC and 12-24 V DC or 230 V AC and 12-24 V DC | 24 V AC/DC | 115 V AC and 12-24 V DC or 230 V AC and 12-24 V DC | 24 V AC/DC | 24 V DC |

|  |  |  |  |  |  |
|---|---|---|---|---|---|
| SSM | SR | IM | EM | SC10 | SC26/XS26 |
| p. 40 | p. 40 | p. 40 | p. 40 | p. 42 | p. 42 |
| Preconfigured Safety Relay Modules | | | | Configurable Controllers | |
| | | | | ✓ | ✓ |
| | ✓ | ✓ | | ✓ | ✓ |
| | | | | ✓ | ✓ |
| | | | | ✓ | ✓ |
| | | | | ✓ | ✓ |
| | | | | 2 chains | 8 chains |
| | | | | ✓ | ✓ |
| | | | | | ✓ (XS Series only) |
| | | | | | ✓ |
| | | | | ✓ | ✓ |
| | | | | ✓ | ✓ |
| | | | ✓ | ✓ | ✓ |
| | | | OFF delay available | ✓ | ✓ |
| ✓ | | | | | |
| Cat. 4 PL e, per EN ISO 13849-1; SIL 3 per IEC 61508 and IEC 62061 | | | | 10 | SC26: up to 26 XS26: up to 154 |
| 2 PNP | 2 NC (dual) or 2 PNP | 2 NC (dual) or 2 PNP | 1 NC (single) or 2 NC (dual) | 2x 3 NO | SC: 2 XS: up to 68 |
| 2 NO | 2 NO, 3 NO | 2 NO, 3 NO | 4 NO or 4 NO with delay | 6A each | 0.5A each |
| 4A | 6A | 6A | 6A | depends on configuration | depends on configuration |
| 1 NC | 1 NC | 1 NC, depending on model | | 24 V DC | 24 V DC |
| 24 V DC | 24 V DC | 24 V DC | 24 V DC or 24 V AC/DC, depending on model | | |


Safety Relays and Controllers



Industrial safety controllers and relays provide an interface between safety devices and the machines and processes those devices monitor for a complete and easy-to-use safety control solution.



Safety controllers can be tailored for a wide variety of machines, including machines with multiple processes.

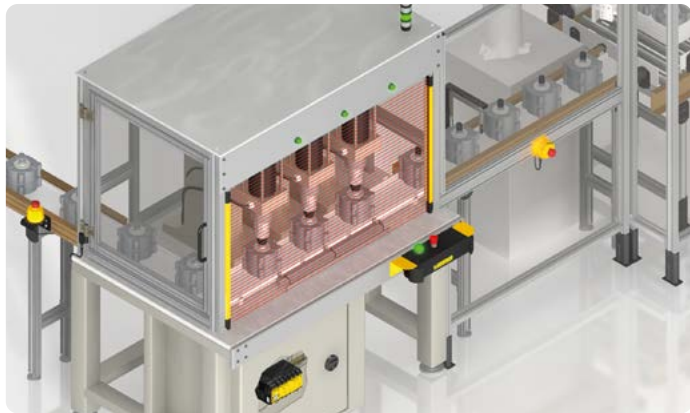

Configurable controllers monitor multiple safety devices, such as E-stop buttons, safety switches, safety light screens, two-hand controls, and rope pull switches.

Safety Relays



- Cost-effective for simple safety circuits
- Preset functionality: Configuration not required
 - Safety inputs: 1
 - Independently controlled safety outputs: 1; 4 to 7A
 - Choose from a variety of models:
 - Universal input safety relays
 - E-stop monitoring safety relays
 - Muting safety relays
 - Safe speed monitoring relays
 - Safety mat relays
 - Safety extension relays
 - Interface relays

Hybrid Safety Controller Plus 2 Safety Relays







- Flexible and cost-effective solution for machines typically using 2 safety relays
- PC configurable: Flexible and easy-to-use
 - Safety inputs: up to 10; up to 70 with ISD
 - Independently controlled safety outputs: 2; 6A each
 - Convertible safety inputs: 4
 - Terminal LEDs for easy troubleshooting
 - Industrial Ethernet
 - Each output contains 3 NO redundant safety contacts

Expandable Safety Controller



- Expandable for complex safety applications where 3 or more safety relays are typically used
- PC configurable: flexible and easy-to-use
 - Network accessible: configure and live view via an Ethernet connection (Ethernet enabled XS26 and SC26 models only)
 - Safety inputs: 26 (base unit) up to 154
 - Independently controlled safety outputs: up to 68; 0.5A to 6A each
 - Convertible safety inputs: 8 (Base Unit) up to 40
 - LCD screen for easy troubleshooting
 - Industrial Ethernet


Connect safety devices easily to the safety controller

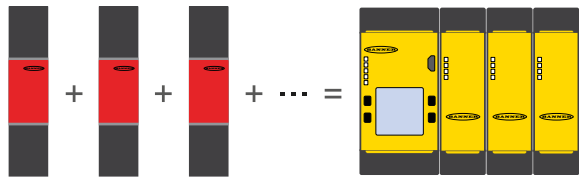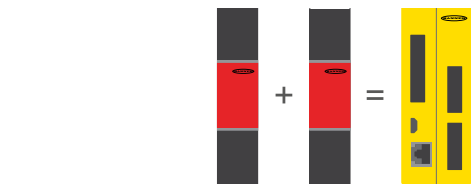

Safety Controllers

XS26 Expandable Safety Controller

26 to 154 Safety Inputs



Safety Outputs
Safety Zones: 2 to 4

- 6A Relay 2 NO
- 0.5A Solid State


- Optional display screen allows local diagnostics for efficient troubleshooting
- Up to eight expansion I/O modules can be added as automation requirements grow or change
- Choose from six expansion module models with a variety of safety inputs, solid-state safety outputs and safety relay outputs
- Controller and input modules allow safety inputs to be converted to status outputs for efficient terminal use

Industrial Ethernet

EtherNet/IP Modbus TCP/IP EtherCAT

SC10 Safety Controller

10 Safety Inputs

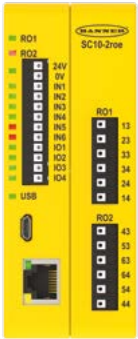

Safety Outputs
Safety Zone 1: 6A Relay 3 NO

Safety Zone 2: 6A Relay 3 NO



- 10 safety inputs
- 4 safety inputs allowed to be converted to status outputs for efficient terminal use
- 2 redundant safety outputs
- LED indication next to each output
- Industrial Ethernet two-way communication
- Programmable via USB connection
- In-Series Diagnostic capable

Industrial Ethernet

EtherNet/IP Modbus TCP/IP EtherCAT

Easy to Configure and Integrate with a PLC

Store SC-XM3 memory card directly on controller




SC-XM3 Fast Programming and Swapout

- Backup copy of configuration, password, network settings
- Download configuration without a PC
- Save time during panel build
- Fast swapout minimizes downtime


Free Software

Intuitive PLC Integration



In-Series Diagnostics Functionality

In-Series Diagnostics allows you to connect up to 32 devices with one in-series connection and communicate directly with the most commonly used PLCs. Achieves up to CAT4, SIL3, PLe safety rating.

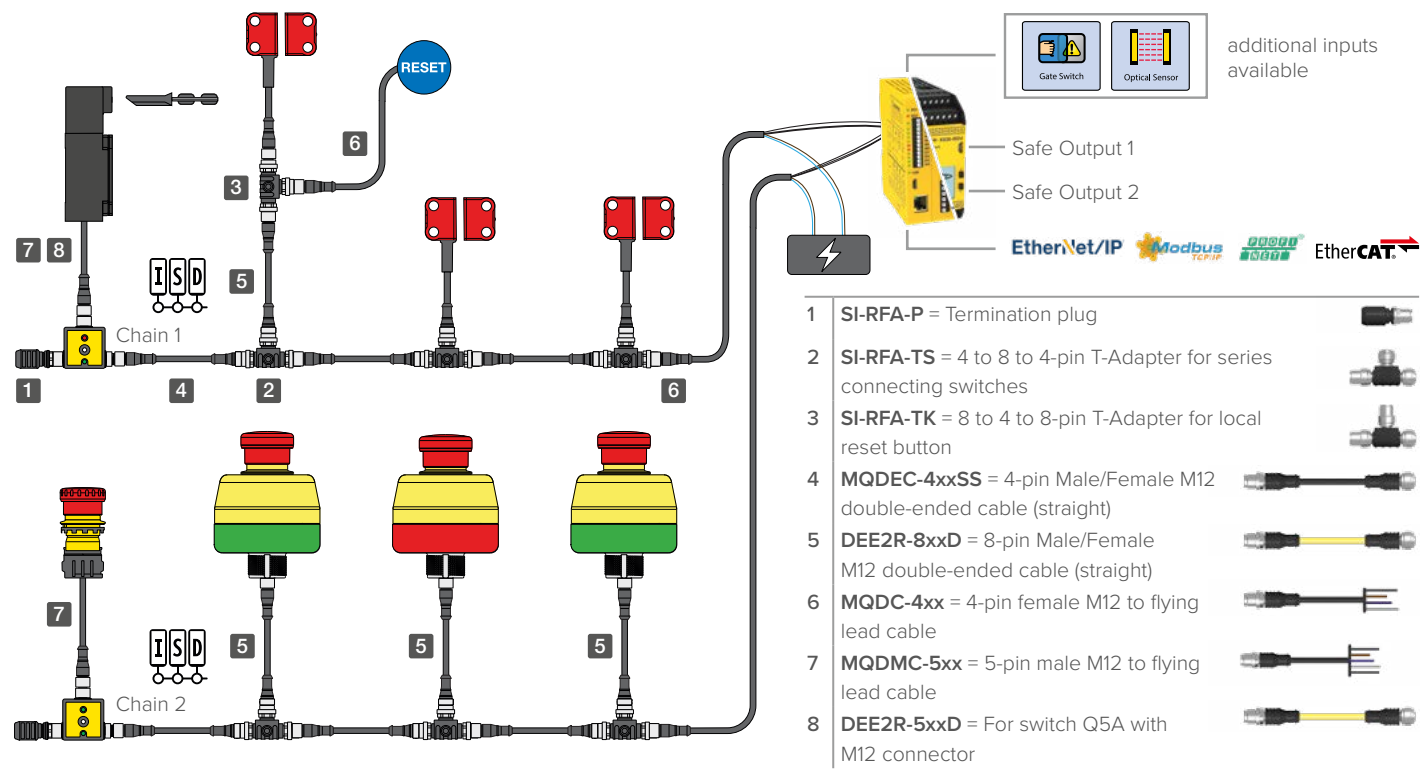

Compatible Devices

Family: SI-RF

System Type: D

Reset: T

Coding: U

Connection: P8

RFID Safety Door Switch

D = Cascade with (ISD)

T = Automatic (Trip)
L = Manual (Latch)

L = Low
H = High
U = Unique

P8 = 250 mm 8-pin M12 pigtail QD

Family: SSA-EB1PL

Color Armed: Y

Color Pressed: R

Options: Blank

Outputs: OD

Enclosure Style: ECQ8

Reset: R

Illuminated E-Stop

X = Off
Y = Yellow Solid
G = Green Solid

R = Red Flashing

Blank = Standard
S1 = Shroud Style 1

OD = OSSD Outputs with ISD

ECQ8 = 30 mm Round
ED1Q8 = Flush Mount (square)

Blank = Without Local Reset
R = With Local Reset

Family: SSA-ISD

Device Input Type: TC

Input Pin Configuration: A

ISD Connect

TC = 2 NC Sets of Dry Contacts

A = 5-Pin Config A

| Pin | 1 | 2 | 3 | 4 | 5 |
|----------|------|------|-----|------|------|
| Config A | Ch1a | Ch1b | N/C | Ch2a | Ch2b |

Configure Your System in Minutes

The feature-rich SC10 and SC/XS26 safety controller software provides a seamless user interface for setting up and managing safety systems. The software features an intuitive icon-based, drag-and-drop user interface to reduce the learning curve and speed up commissioning.


- Complex configurations made easy
- Simulate configurations before implementation
- Auto configure Industrial Ethernet for remote monitoring and diagnostics
- Use the same software to access and configure the controller (Ethernet enabled XS26 and SC26 models only)

Start using the **free software** today. Go to www.bannerengineering.com/safetycontroller

1. Choose Controller




2. Equipment View

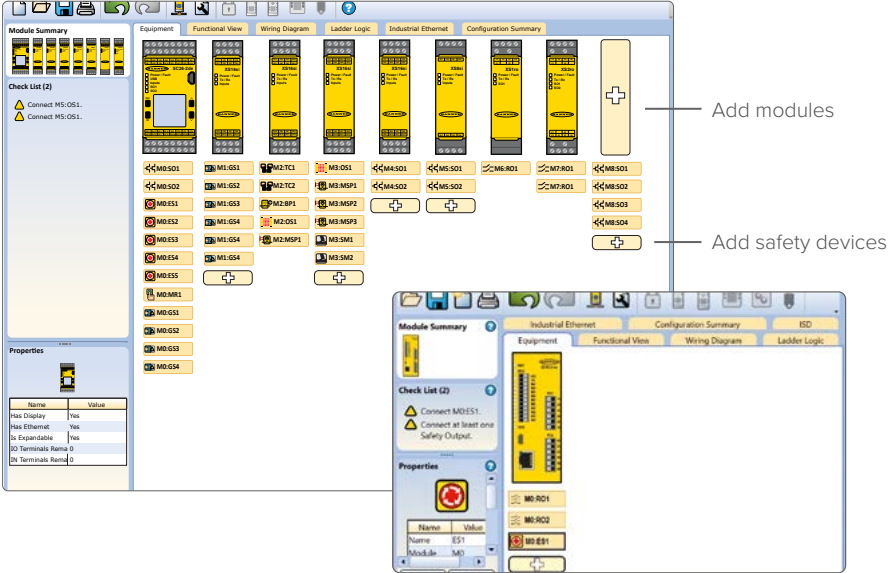


3. Add safety devices



4. Select safety device properties

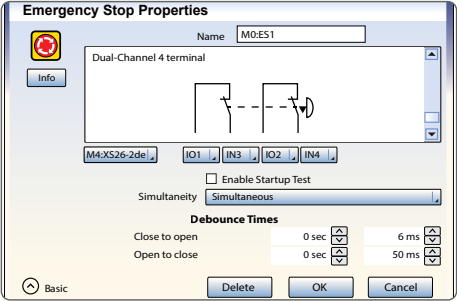


5. Add virtual non-safety inputs

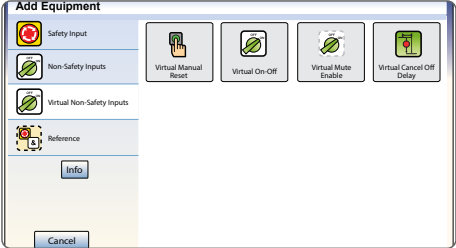


Intuitive setup and PLC integration


- Expedite PLC Integration with Tag Export Feature
- Eliminates error-prone manual entries
- Import tags to PLC via .csv or .xml files
- Defines actionable In-Series Diagnostic data within the PLC
- For more information visit bannerengineering.com/safetycontroller

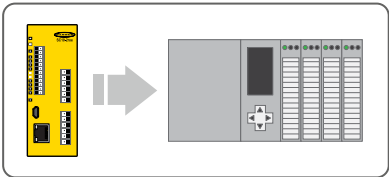

System Software

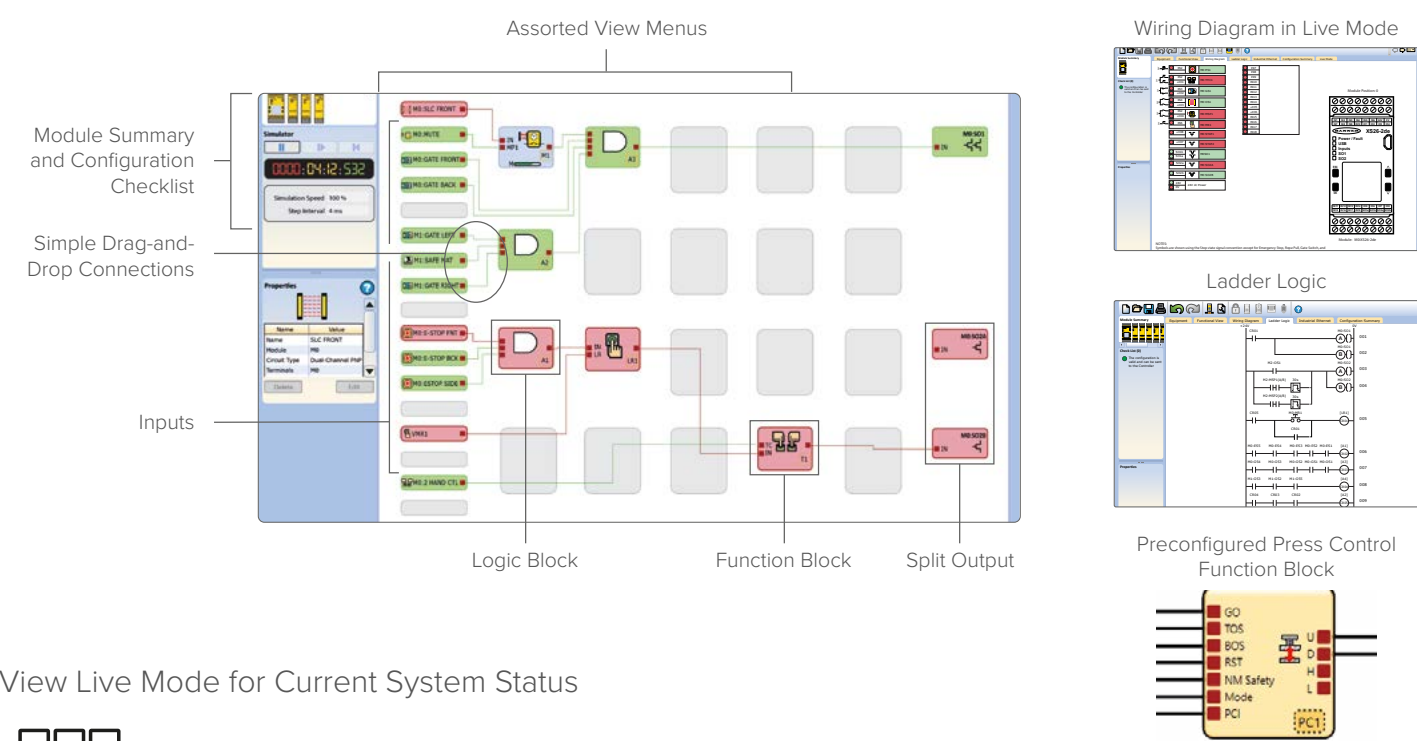


View Live Mode for Current System Status

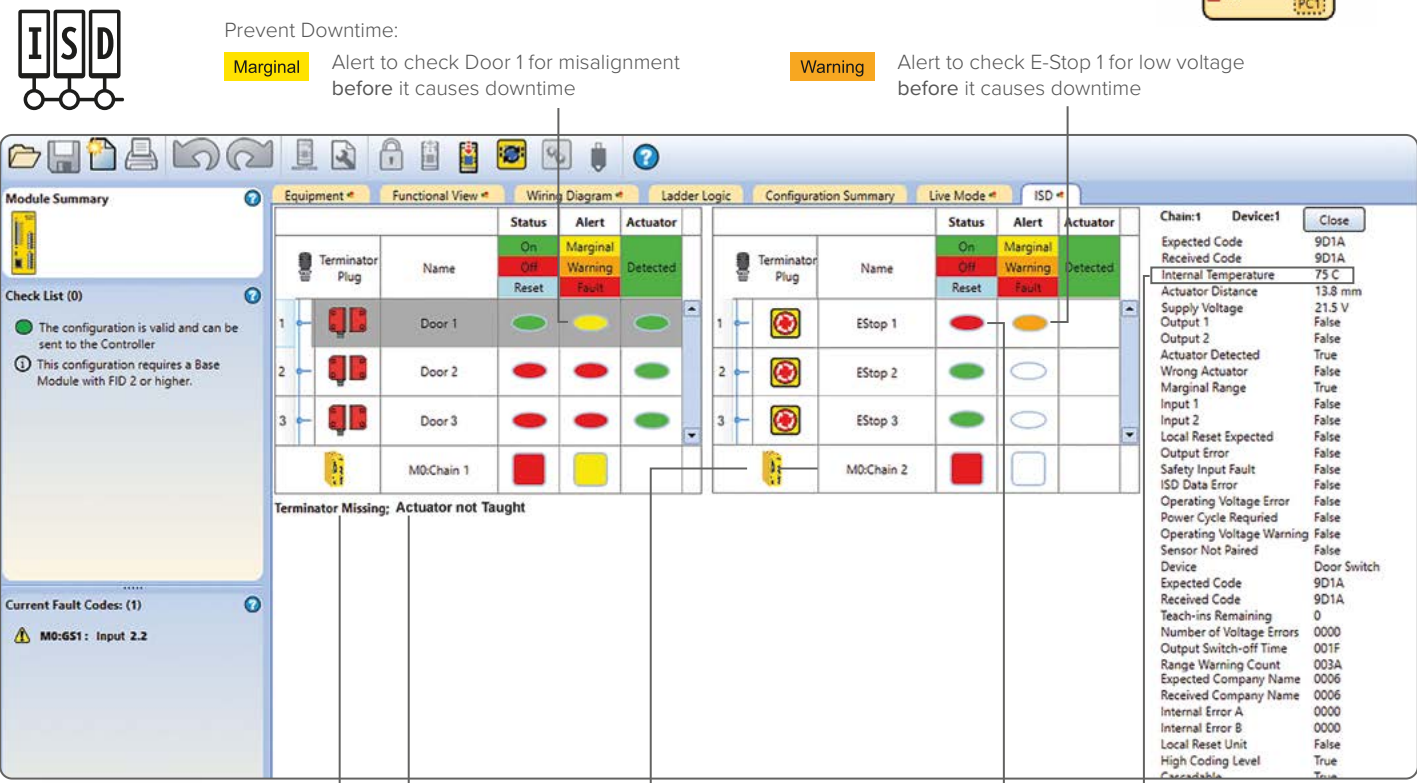

Troubleshooting Made Easy:

Terminator missing




Actuator not taught



Up to 32 ISD safety devices in any order per chain

Reduce Downtime: Local operator guidance to activated E-Stop




Additional uses for ISD


- Rotation/Indexing
- Tool Identification
- Position Verification

Safety Relays

E-Stop and Guard Safety Modules

|  | Supply Voltage | Inputs | Safety Outputs | Aux. Outputs | Output Rating | Output Response Time | Models |
|---|-----------------------|------------------------------|----------------|--------------|---------------|----------------------|-------------------|
| | 24 V AC/DC | 1 NC & 1 NO (single or dual) | 2 NO | – | 6 A | 35 ms | GM-FA-10J |
| | | 1 NC (single) or 2 NC (dual) | 3 NO | – | 6 A | 25 ms | ES-FA-9AA |
| | | 1 NC (single) or 2 NC (dual) | 2 NO | 1 NC | 7 A | 25 ms | ES-FA-11AA |
| | | 1 NC (single) | 3 NO | 1 NC | 6 A | 35 ms | ES-FA-6G |
| | 115 V AC & 12-24 V DC | 1 NC (single) or 2 NC (dual) | 4 NO | 1 NC & 2 PNP | 6 A | 25 ms | ES-UA-5A |
| | 230 V AC & 12-24 V DC | | | | | | ES-VA-5A |


Universal Safety Input Modules

|  | Supply Voltage | Inputs | Safety Outputs | Aux. Outputs | Output Rating | Output Response Time | Models |
|---|----------------|---------------------------------------|----------------|--------------|---------------|----------------------|------------------|
| | 24 V AC/DC | 1 NC (single) or 2 NC (dual) or 2 PNP | 3 NO | – | 6 A | 25 ms | UM-FA-9A |
| | | | 2 NO | 1 NC | 7 A | | UM-FA-11A |


Modules for Specific Monitoring Applications

|  | Supply Voltage | Inputs | Safety Outputs | Aux. Outputs | Output Rating | Output Response Time | Models |
|--|-----------------------|---|----------------|--------------|---------------|----------------------|------------------|
| | 115 V AC & 12-24 V DC | 1 (or multiple in series) 4-wire safety mat | 4 NO | 1 NC & 2 PNP | 6 A | 50 ms | SM-GA-5A |
| | 230 V AC & 12-24 V DC | | | | | | SM-HA-5A |
| | 24 V AC/DC | 1 (2x2 complementary) for two-hand control | 2 NO | – | 6 A | 35 ms | AT-FM-10K |


Muting Modules

|  | Supply Voltage | Input Device | Inputs | Safety Outputs | Aux. Outputs | Output Rating | Output Response Time | Models |
|---|----------------|---------------------------------|--|----------------|--------------|---------------|----------------------|-------------------|
| | 24 V DC | Electromechanical & solid state | 2 NC muteable (dual) & 2 NC SSI (dual) | 2 PNP OSSD | 1 PNP | 0.5 A | 10 ms | MMD-TA-12B |
| | | | | 2 NO | 1 NC | 6 A | 20 ms | MMD-TA-11B |

Safe Speed Monitoring Modules


|  | Supply Voltage | Inputs | Safety Outputs | Aux. Outputs | Output Rating | Ranges (impulses/minute) | Models |
|---|----------------|--------|----------------|--------------|---------------|-------------------------------------|---------------------|
| | 24 V AC/DC | 2 PNP | 2 NO | 1 NC | 4 A | 5-40, 35-340, 300-2700, 1200-10500 | SSM-FM-11A10 |
| | | | | | | 10-80, 80-650, 600-5300, 2400-20000 | SSM-FM-11A20 |

Interface Modules

|  | Supply Voltage | Inputs | Safety Outputs | Aux. Outputs | Output Rating | Output Response Time | Models |
|---|----------------|--------|----------------|--------------|---------------|----------------------|------------------|
| | 24 V DC | 2 NC | 3 NO | – | 6 A | 20 ms | SR-IM-9A |
| | | | 2 NO | 1 NC | | | SR-IM-11A |
| | | | 3 NO | – | | | IM-T-9A |
| | | | 2 NO | 1 NC | | | IM-T-11A |

Safety Controllers


Non-expandable Safety Controllers
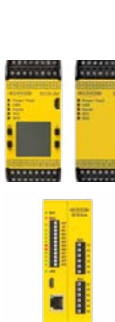
|  | Description | Housing H x W x D (mm) | Inputs/Convertible | Independently Controlled Safe Outputs | Maximum Safety Output Rating | Features | Models (24 V DC) |
|---|------------------------|------------------------|--------------------|---------------------------------------|-------------------------------|-------------------|------------------|
| | SC26 Safety Controller | 110 x 45 x 128 | 26/8 | 2 Dual Channel PNP | 0.5A at 24 V DC | Display | SC26-2d |
| | SC10 Safety Controller | 115 x 45 x 100 | 10/4 | 2 Dual Channel Relays | 2x 3 NO: 6A 250 V AC/ 24 V DC | Display, Ethernet | SC26-2de |
| | | | | | | – | SC26-2 |
| | | | | | | Ethernet | SC26-2e |
| | | | | | | ISD, Ethernet | SC10-2roe |

Expandable Safety Controllers

|  | Description | Housing H x W x D (mm) | Inputs/ Convertible | Independently Controlled Safe Outputs | Maximum Safety Output Rating | Features | Models (24 V DC) |
|--|--|------------------------------|------------------------|---|---------------------------------|-------------------|---------------------|
| | XS26 Expandable Safety Controller | 110 x 45 x 128 | 26/8 | 2 Dual Channel PNP | 0.5A at 24 V DC | Display | XS26-2d |
| | | | | | | Display, Ethernet | XS26-2de |
| | | | | | | – | XS26-2 |
| | | | | | | Ethernet | XS26-2e |
| | | | | | | ISD | XS26-ISD |
| | Safety Input Module | W: 22.5 mm | 8/2 | – | – | – | XS8si |
| | | | 16/4 | – | – | – | XS16si |
| | Safety Output Module | | – | 2 Dual Channel PNP | 0.75A at 24 V DC | – | XS2so |
| | | | – | 4 Dual Channel PNP | 0.5A at 24 V DC | – | XS4so |
| | Safety Relay Output Module | | – | 1 Dual Channel Relay | 6A; 2 NO, 1 NC Aux (2.5A) | – | XS1ro |
| | | | – | 2 Dual Channel Relays | 6A; 2x 2 NO, 2x 1 NC Aux (2.5A) | – | XS2ro |
| | Network Expansion Module | | – | – | – | Ethercat | XSeCAT |

Expansion Modules

|  | Supply Voltage | Inputs | Safety Outputs | Output Rating | Aux. Outputs | Output Response Time | Delay | Models |
|---|----------------|------------------------------|----------------|---------------|--------------|----------------------|-------|------------------|
| | 24 V DC | 1 NC (single) or 2 NC (dual) | 4 NO | 6 A | – | 20 ms | – | EM-T-7A |
| | 24 V AC/DC | 1 NC (single) | 4 NO w/delay | | – | 35 ms | – | EM-F-7G |
| | | | | | – | – | 0.5 s | EM-FD-7G2 |
| | | | | | – | – | 1.0 s | EM-FD-7G3 |
| | | | | | – | – | 2.0 s | EM-FD-7G4 |

Accessories



SC-USB2
USB Cable



SC-XM2
Memory Card for XS26 and SC26



SC-XM3
Memory Card for SC10



SC-XMP2
SC-XM2/3 Configuration Tool

Safety Switches Selection Guide



| | |
|--|-------------|
| | SI-MAG |
| | p. 50 |
| Device Type | Magnetic |
| Switch Style | Non-Contact |
| Non-Locking | ✓ |
| Locking | |
| Position | ✓ |
| Contacts | 1 NC, 1 NO |
| Locking or Unlocking Power | |
| Straight Rigid Inline | |
| Rigid Inline | |
| Flexible Inline | |
| High-Force Accessory | |
| LED Status Indication | |
| Cascadable | |
| ISD (In-Series Diagnostics) | |
| Coding level/ Manipulation protection EN ISO 14119 | Low coding |
| Housing Material | Plastic |
| Locking | |
| Actuation Extraction Force | |
| Resettable Switching Point | |



| | |
|--|------------------------|
| | SI-RF |
| | p. 52 |
| Device Type | RFID |
| Switch Style | Non-Contact |
| Non-Locking | ✓ |
| Locking | |
| Position | ✓ |
| Contacts | OSSD PNP |
| Locking or Unlocking Power | |
| Straight Rigid Inline | |
| Rigid Inline | |
| Flexible Inline | |
| High-Force Accessory | |
| LED Status Indication | ✓ |
| Cascadable | ✓ |
| ISD (In-Series Diagnostics) | ✓ |
| Coding level/ Manipulation protection EN ISO 14119 | Unique/Low/High coding |
| Housing Material | Plastic |
| Locking | |
| Actuation Extraction Force | |
| Resettable Switching Point | |



| | |
|--|----------------------------------|
| | SI-LS |
| | p. 50 |
| Device Type | Mechanical |
| Switch Style | Separate Actuator |
| Non-Locking | ✓ |
| Locking | |
| Position | |
| Contacts | 2 NC, 1 NO 1 NC, 1 NO 2 NC |
| Locking or Unlocking Power | |
| Straight Rigid Inline | ✓ |
| Rigid Inline | ✓ |
| Flexible Inline | ✓ |
| High-Force Accessory | |
| LED Status Indication | |
| Cascadable | |
| ISD (In-Series Diagnostics) | |
| Coding level/ Manipulation protection EN ISO 14119 | Low coding |
| Housing Material | Plastic |
| Locking | |
| Actuation Extraction Force | 10 N |
| Resettable Switching Point | |



| | |
|--|---|
| | SI-QS |
| | p. 50 |
| Device Type | Mechanical |
| Switch Style | Separate Actuator |
| Non-Locking | ✓ |
| Locking | |
| Position | |
| Contacts | 1 NC, 1 NO 2 NC 2 NC, 1 NO 1 NC |
| Locking or Unlocking Power | |
| Straight Rigid Inline | |
| Rigid Inline | ✓ |
| Flexible Inline | ✓ |
| High-Force Accessory | ✓ |
| LED Status Indication | |
| Cascadable | |
| ISD (In-Series Diagnostics) | |
| Coding level/ Manipulation protection EN ISO 14119 | Low coding |
| Housing Material | Plastic |
| Locking | |
| Actuation Extraction Force | 10 N High-Force models: adjust. from 50-100 N |
| Resettable Switching Point | |



| | |
|--|--|
| | SI-GL42 |
| | p. 50 |
| Device Type | Mechanical |
| Switch Style | Separate Actuator |
| Non-Locking | ✓ |
| Locking | |
| Position | |
| Contacts | 1 NO 1 NC 1 NC, 1 NO 2 NC 2 NC, 1 NO 3 NC |
| Locking or Unlocking Power | |
| Straight Rigid Inline | ✓ |
| Rigid Inline | ✓ |
| Flexible Inline | ✓ |
| High-Force Accessory | |
| LED Status Indication | |
| Cascadable | |
| ISD (In-Series Diagnostics) | Compatible with ISD connect |
| Coding level/ Manipulation protection EN ISO 14119 | Low coding |
| Housing Material | Head: Metal Body: Plastic |
| Locking | |
| Actuation Extraction Force | Spring lock Solenoid lock 1500 N when locked |
| Resettable Switching Point | |



| | |
|--|---|
| | SI-LS42 |
| | p. 50 |
| Device Type | Mechanical |
| Switch Style | Separate Actuator |
| Non-Locking | ✓ |
| Locking | |
| Position | |
| Contacts | 1 NC, 1 NO 2 NC, 1 NO 1 NC 2 NC 3 NC |
| Locking or Unlocking Power | |
| Straight Rigid Inline | ✓ |
| Rigid Inline | |
| Flexible Inline | ✓ |
| High-Force Accessory | |
| LED Status Indication | |
| Cascadable | |
| ISD (In-Series Diagnostics) | |
| Coding level/ Manipulation protection EN ISO 14119 | Low coding |
| Housing Material | Plastic |
| Locking | |
| Actuation Extraction Force | Spring lock Solenoid lock 2000 N when locked |
| Resettable Switching Point | |



| | |
|--|--|
| | SI-LS83 |
| | p. 50 |
| Device Type | Plunger, Roller, Spindle-mount, Lever |
| Switch Style | Limit |
| Non-Locking | ✓ |
| Locking | |
| Position | |
| Contacts | 1 NC, 1 NO 2 NC 2 NC, 1 NO |
| Locking or Unlocking Power | |
| Straight Rigid Inline | |
| Rigid Inline | |
| Flexible Inline | |
| High-Force Accessory | |
| LED Status Indication | |
| Cascadable | |
| ISD (In-Series Diagnostics) | |
| Coding level/ Manipulation protection EN ISO 14119 | Uncoded |
| Housing Material | Plastic |
| Locking | |
| Actuation Extraction Force | |
| Resettable Switching Point | |



| | |
|--|--------------------------------|
| | SI-HG63 |
| | p. 50 |
| Device Type | Hinge |
| Switch Style | Hinge |
| Non-Locking | ✓ |
| Locking | |
| Position | |
| Contacts | 2 NC, 1 NO |
| Locking or Unlocking Power | |
| Straight Rigid Inline | |
| Rigid Inline | |
| Flexible Inline | |
| High-Force Accessory | |
| LED Status Indication | |
| Cascadable | |
| ISD (In-Series Diagnostics) | Compatible with ISD connect |
| Coding level/ Manipulation protection EN ISO 14119 | Uncoded |
| Housing Material | Metal |
| Locking | |
| Actuation Extraction Force | |
| Resettable Switching Point | |



| | |
|--|--------------------------------|
| | SI-HG80 |
| | p. 50 |
| Device Type | Hinge |
| Switch Style | Hinge |
| Non-Locking | ✓ |
| Locking | |
| Position | |
| Contacts | 1 NC, 1 NO |
| Locking or Unlocking Power | |
| Straight Rigid Inline | |
| Rigid Inline | |
| Flexible Inline | |
| High-Force Accessory | |
| LED Status Indication | |
| Cascadable | |
| ISD (In-Series Diagnostics) | Compatible with ISD connect |
| Coding level/ Manipulation protection EN ISO 14119 | Uncoded |
| Housing Material | Metal |
| Locking | |
| Actuation Extraction Force | |
| Resettable Switching Point | |

Safety Switches



The SI-GL42D fail-safe guard locking switch has several guard locking options: manual, spring-to-lock, or power-to-lock.

The safety switch can manually be unlocked using a tool in case of maintenance work. Emergency or escape release are additional functions that allow for quick intervention when required.

In spring-to-lock models, the guard is locked by spring force. To unlock, the solenoid must be energized.

In power-to-lock models, the guard is locked when the solenoid is energized. To unlock, power must be switched off.

Hinge Switches



- One-piece sensor and actuator with hinge function
- Fast installation and setup with repositionable safety switch point
- Stainless steel and IP69 available
- Matching hinges without sensing available for additional door support
- Available with up to 270° safety switch point operation range

Non-Contact Switches



- Two-piece design where sensor and actuator do not contact
- Coded magnets/tags minimize the potential for intentional defeat
- A single pair can achieve up to Category 4/PLe safety rating
- Accommodating to misalignment
- Non contact solution minimizes device wear and tear, even in applications with persistent use
- Up to IP69 solutions available

Mechanical Switches



- Two-piece design with mechanical operator feedback
- Flexible actuator options for misalignment
- Rotatable heads for flexible installation
- Mechanically coded actuator to minimize tampering
- Up to 15N latching force to reduce downtime due to vibrating doors
- One-piece limit switches available

Locking Switches



- Two-piece design with up to 2000N locking force for safety or process critical applications
- Flexible actuator options for misalignment
- Rotatable heads for flexible installation
- Mechanically coded actuator to minimize tampering
- Up to 15N latching force to position door prior to locking

Limit Switches



- Cost effective one piece sensor
- No actuator allows for fewer alignment issues
- Hideable making them more tamper resistant
- Rotating head and top or side engagement allows for eight different actuator positions
- Design meets positive opening requirements for safety switches



Rotatable actuator heads enable a variety of mounting positions: standard, vertical, horizontal, slight vertical/horizontal offset, small actuating radius




Emergency release enables immediate opening from outside dangerous area




Lock/unlock mechanism

M12 connector options are available

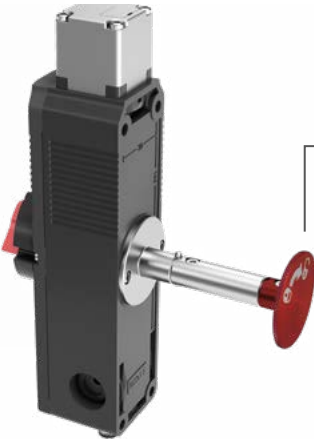

Escape release enables immediate opening from within the dangerous area

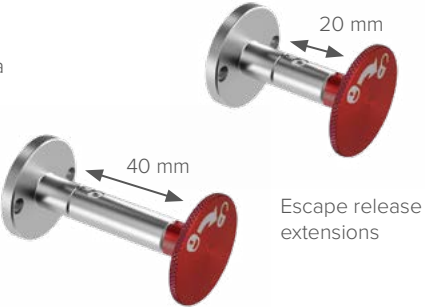

Non-Contact RFID Safety Switches



Safety switches respond when a mechanical guard is opened. They feature “positive opening” contacts for high reliability regardless of environmental conditions and withstand attempts to override the switch and defeat the system.

RFID SI-RF Switches



- Single door RFID non-contact gate/door sensing solution
- Basic, medium, and high tamper resistance
 - Misalignment tolerance of 10 mm
 - Resistant to high vibration and operations with metallic shavings
 - On-board LED for status and diagnostics

RFID SI-RF Switches – Cascade



- Multiple door RFID non-contact gate/door sensing solution
- Basic, medium, and high tamper resistance
 - Misalignment tolerance of 10 mm
 - Resistant to high vibration and operations with metallic shavings
 - On-board LED for status and diagnostics
 - Connect up to 32 sensors in cascade while maintaining the highest level of safety
 - 4-pin QD connections for cost-effective, simple, error-free installation
 - RFID cascade with In-Series Diagnostics available



Enabling Devices




A two-hand control safeguarding system will prevent the operator from approaching the machine while a hazard is present. Duo-Touch Run Bar provides an all-in-one solution.




Handheld grip-styled switches are used for manual control of machine functions including visual observations, minor adjustments, calibration, and more.

Two-Hand Control



| STB Self-Checking Touch Buttons | | | | | |
|--|------------------------|--|---------------|-----------|--|
| Connection | Touch Surface Material | Output | Power Supply | Models | |
| 2 m cable | Polyetherimide (PEI) | Solid-state 2 Complementary PNP (1 ON, 1 OFF) | 10-30 V DC | STBVP6 | |
| 4-pin M12 QD | | | | STBVP6Q5 | |
| 2 m cable | | E/M Relay 2 Complementary SPST (1 NC, 1 NO) | 20-30 V AC/DC | STBVR81 | |
| 5-pin M12 QD | | | | STBVR81Q6 | |
| STB buttons include yellow field cover to prevent unintended switching. To comply to safety standards, STB buttons must be used with appropriate Two-Hand control modules, SC26, XS26 or SC10 Safety Controller or comparable Type IIIC Two-Hand system. | | | | | |



| DUO-TOUCH Two-Hand Control Kits with STB Touch Buttons 2 NO safety outputs, no auxiliary outputs, 24 V AC/DC, Cat 4 and Type IIIC | | | | | |
|--|-----------|------------------------|-----------|--------------|------------------|
| Module | IP Rating | STB Buttons (2 pieces) | IP Rating | Connection | Kits |
| AT-FM-10K | IP20 | STBVP6 | IP66 | 2 m cable | ATK-VP6 |
| | | STBVP6Q5 | | 4-pin M12 QD | ATK-VP6Q5 |
| Kit does not include run bar | | | | | |

Two-Hand Control Run Bars

| Run Bars with STBVP6 | | | | | |
|----------------------|-----------|---------------|-----------|----------------|--------------|
| Models | IP Rating | Models | IP Rating | Connection | E-Stop |
| STBVP6-RB1 | IP20 | STBVP6-RB2 | IP65 | Terminal strip | Not included |
| STBVP6-RB1Q8 | | STBVP6-RB2Q8 | | 8-pin 7/8 QD | Not included |
| STBVP6-RB1E02 | | STBVP6-RB2E02 | | Terminal strip | SSA-EBM-02L |


Enabling Devices



| ED1G Enabling Devices | | |
|-----------------------|-----------------------|-----------------------|
| Contact Configuration | Momentary Push Button | Models |
| 2 NO & 1 NC Aux | – | ED1G-L21SM-1N |
| 2 NO & 1 NC Aux | 1 NO | ED1G-L21SMB-1N |
| 2 NO | 2 NO | ED1G-L20MB-1N |

Safety Switches


Magnetic Switches



| Family | Housing | Device Type | Connection Orientation | Connection |
|----------------|---|--|---|--|
| SI-MAGB | 1 | SM | | |
| | 1 = Rectangular 2 = Small 3 = Round | SM = Sensor MM = Magnet | Blank = Standard CO = Opposite | Blank = 3 m cable QD = 4-pin QD -W/30 = 9 m cable |

NOTE: When ordering housing 1 or 2 with a QD connection, you will receive an M8 Pico connector. When ordering housing 3 with a QD connection you will receive an M12 Euro connector.

Hinge Switches




| Family | Contact Configuration | Connection | Switch Position | Connection Exit | Washdown Rating |
|---|-----------------------|---|-----------------|---|---|
| SI-HG63 | F | QD | R | | -W |
| SI-HG63 = Stainless Steel SI-HGZ63 = Zinc Die-cast | F = 2 NC/1 NO | QD = 6-pin Micro-style QD 5M = 5 m cable with flying leads | | Blank = Inline QD/Cable R = Right angle QD/Cable | Blank = IP67 -W = IP69 Washdown* |

R = Switch mounted on right side of hinge
L = Switch mounted on left side of hinge
B = Switches mounted on both sides of hinge*

*Stainless steel models only

RFID Switches



| Family | System Type | Reset | Coding | Connection |
|--------------|--|--|--|---|
| SI-RF | P | T | U | P8 |
| | P = Single S = Cascade D = Cascade with ISD | T = Automatic (Trip) L = Manual (Latch) | L = Low H = High U = Unique | P8 = 250 mm pigtail, M12 8-pin QD 2M = 2 m cordset* P5 = 250 mm, M12 5-pin QD* |

SI-RF-A or SI-RF-A2 actuator is required to complete a sensor solution (ordered separately)

SI-RF-A2


Tamper Resistant Coding
Low (L): The SI-RF Safety Switch accepts any SI-RF-A actuator

High (H): The SI-RF Safety Switch only accepts the last taught-in actuator, a maximum of 12 teach-in processes are possible

Unique (U): The SI-RF Safety Switch only accepts the taught-in actuator, and only one teach-in process is possible

*Available on single models only

Mechanical Switches



| Family | Body Style | Contact Configuration | Connection |
|--------------|--|--|--|
| SI-LS | 83 | D | |
| | 83 = 83 mm 100 = 100 mm | D = 1 NO/1 NC (83 mm models only) E = 2 NC (83 mm models only) F = 2 NC/1 NO (100 mm models only) | Blank = Screw terminals Q5A = M12 connector; ISD Connect Compatible (SI-LS83E-Q5A and SI-LS100F-Q5A only) |

Actuators









SI-QS-SSA-2
Straight Rigid Inline Actuator


SI-QS-SSA-3
Right-Angle Rigid Inline Actuator


SI-QS-SSU
Flexible Inline Actuator

Brackets









SI-HG80DQD
Inline QD Fitting

SI-HG80DQDR
Right-angle QD Fitting

SI-HG80A
Blank Hinge

SI-HG63A
Blank Hinge


Adaptor Cable



MQEAC-601-Q5A
SI-HG63 to ISD Connect Adaptor Cable

Safety Switches

Locking Switches

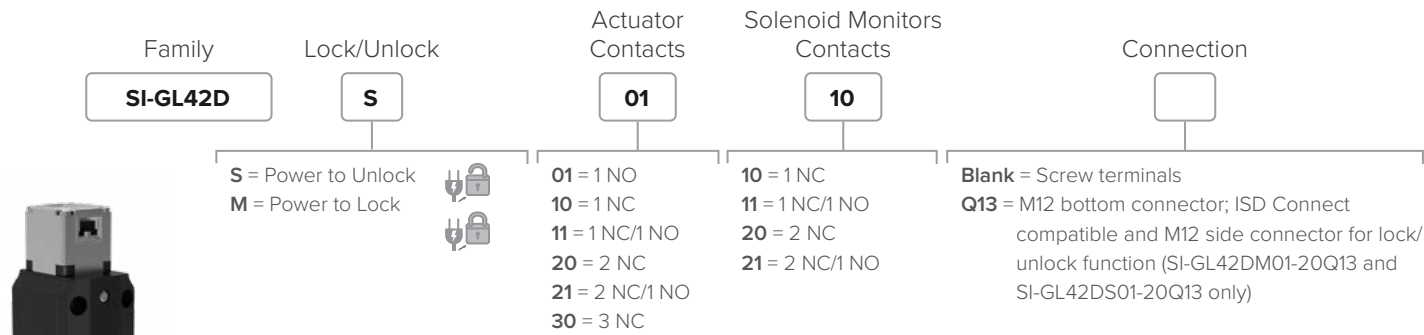

Actuators

SI-QM-SSA-2
Straight rigid actuator for sliding or removable guards

SI-QM-SSA-2RA
Flat rigid actuator for sliding or removable guards

SI-QM-SMFA-2
Flexible actuator for small hinged guards 150 mm or larger

SI-QM-SMFA-3
Flexible actuator for small hinged guards 400 mm or larger

Unlock Mechanism

SI-QM-SSA-SHER
Sliding door handle with emergency release (-SH model without emergency release)

SI-GL42-ERS-F-1
Front mount emergency release lever


SI-GL42-ERS-B-1
Back mount emergency release lever

SI-GL42-ERBD-B-1
Back mount escape release mechanism


SI-GL42-EM20-1
20 mm extension for escape release mechanism

SI-GL42-EM40-1
40 mm extension for escape release mechanism

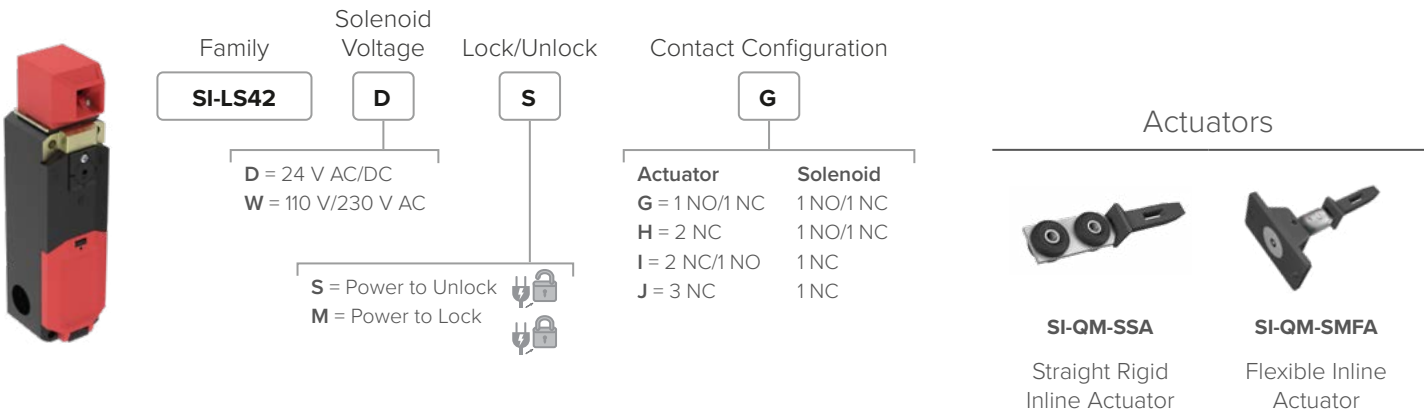

Locking Switches



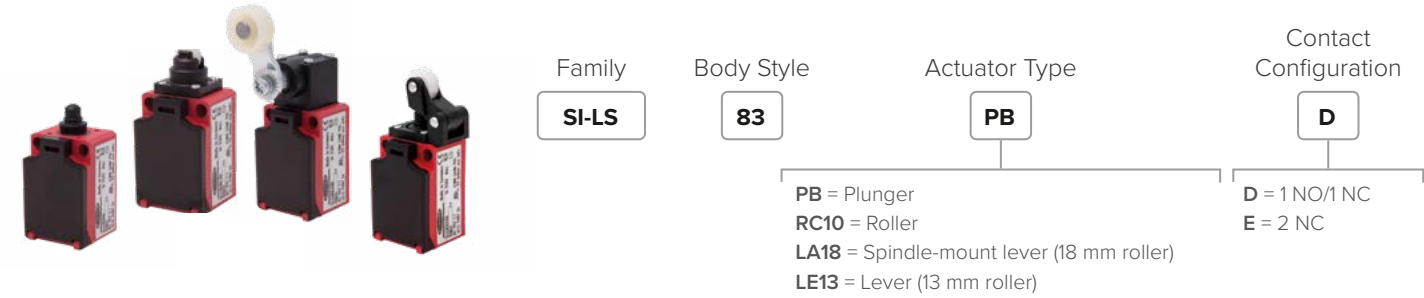







Limit Switches



E-Stop Devices Selection Guide

| | | |
|---|-----------------|------------------------------|
| <div></div> | | |
| | SSA-EBM | SSA-EB |
| | p. 60 | p. 60 |
| Panel Mount Emergency Stop Buttons | | |
| E-Stop | ✓ | ✓ |
| Rope Pull | | |
| Button Size (mm) | 40 mm | 40, 44, 60 mm |
| Illuminated Housing | | |
| Illuminated Button | | ✓ |
| Release | ✓ | ✓ |
| Lock/Unlock Button | | ✓ (SSA-EB1M only) |
| Rope Length (m) | | |
| Rope Connection | | |
| ISD (In-Series Diagnostics) | | |
| Safety Contacts | 1 NC 2 NC | 1 NC 2 NC 3 NC 4 NC |
| Auxiliary Contacts | 1 NO | 1 NO 2 NO |
| OSSD Outputs | | |
| Connection | Screw terminals | Screw terminals |
| Panel/Bracket Hole (mm) | 22 mm | 30 mm |

| | | |
|---|------------------------|------------------------|
| <div></div> | | |
| SSA-EB1PL | SSA-EB1P | SSA-EB1M |
| p. 60 | p. 60 | p. 60 |
| Emergency Stop Buttons | | |
| ✓ | ✓ | ✓ |
| 40, 60 mm | 40, 60 mm | 44 mm |
| ✓ | | ✓ |
| ✓ | ✓ | |
| ✓ | ✓ | ✓ |
| | | ✓ |
| | | |
| ✓ | ✓ | |
| 1 NC 2 NC 4 NC | 1 NC 2 NC 4 NC | 1 NC 2 NC 4 NC |
| 1 NO 2 NO | 1 NO 2 NO | 1 NO 2 NO |
| ✓ | ✓ | |
| M12 or Screw terminals | M12 or Screw terminals | M12 or Screw terminals |
| 30 mm | 30 mm | |

| | | | | |
|--|--|---------------------------|--------------------------|-----------------|
| <div></div> | | | | |
| RP-RM83 | RP-LS42 | RP-QM(T)72 | RP-LM40 | RP-QM90 |
| p. 61 | p. 61 | p. 61 | p. 61 | p. 61 |
| Rope Pull Emergency Stop Switches | | | | |
| ✓ | ✓ | | | |
| ✓ | ✓ | ✓ (only stop control) | ✓ (only stop control) | ✓ |
| 32 mm | 32 mm | | | |
| | | | | |
| ✓ | | | | |
| | | | | |
| 38 m 70 m | 25 m 37.2 m 75 m | 6 m 12 m 20 m | 6 m | 50 + 50 m |
| Built-in turnbuckle or ring connection | Built-in turnbuckle or ring connection | Ring connection | Ring connection | Ring connection |
| 2 NC | 2 NC | 2 NC 4 NC | 2 NC | 2 NC |
| 2 NO | 2 NO | 1 NO (specific models) | | 2 NO |
| | | | | |
| Screw terminals | Screw terminals | Screw terminals | Screw terminals | Screw terminals |
| | | | | |



Related Product: ISD Connect

- Connects a non-ISD-enabled safety device with 2 normally closed sets of contacts, such as a panel-mount E-stop or safety switch, to an ISD chain
- IP67-rated and installs easily, with no assembly or individual wiring required
- Access diagnostic data, prevent system faults, and reduce equipment downtime of non-ISD devices
- Built-in indication for input device and ISD status

E-Stop Devices

E-Stop Buttons*

Family

SSA-E

Version

B1

Button Body

M

LED Function

Options

Interface/Contact Configuration

02

Enclosure

EC

Termination

Connection

Extension

B1 = Palm button, 40/44 mm button, 30 mm hole

B2 = Palm button, 60 mm button, 30 mm hole

Blank = none

L = OFF/red solid

LYR = yellow/red

LGR = green/red

LXR = OFF/red flashing

L2 = Illuminated push button; Push = ON

M = Metal lockable base button

P = Plastic base button

Blank = Standard

P = Padlock capable

S1 = Shroud style 1

02 = 2 NC

04 = 4 NC

11 = 1 NO/1 NC

12 = 1 NO/2 NC

13 = 1 NO/3 NC

22 = 2 NO/2 NC

OD = 2 Solid-state with ISD

EC = Compact OTB-style enclosure, 30 mm mounting

ED = DX80-style enclosure

Blank = Bottom exit (1x QD)

1 = One side exit (1x male QD if used)

Blank = Connection with terminals

Q# = number of pins/conductors

Blank = none

A = AB 1732DS Safety I/O

B = Siemens ET200pro/Turck

R = External manual reset for solid-state outputs

Accessories



SSA-EB1P-ECWC

FDA Grade Silicone Washdown Cover, IP67 and IP69 rated



SSA-MBK-EEC1



SSA-MBK-EEC2



SSA-MBK-EEC3

Panel Mount E-Stop Buttons*

Family

SSA-E

Version

B1

Button Body

M

LED Function

Options

Interface/Contact Configuration

02

Connection

02

B1 = Palm button, 40/44 mm button, 30 mm hole

B2 = Palm button, 60 mm button, 30 mm hole

Blank = none

L1 = Illuminated push button Independent wire

M = Metal lockable base button

P = Plastic base button

Blank = Standard

P = Padlock capable

S1 = Shroud style 1

02 = 2 NC

04 = 4 NC

11 = 1 NO/1 NC

12 = 1 NO/2 NC

13 = 1 NO/3 NC

22 = 2 NO/2 NC

Blank = Screw terminals

A01 = M12 QD; ISD Connect compatible (SSA-EB1P-02-A01 only)

E-Stop Button Kits

Family

SSA-E

Version

B

Button Body

M

Interface/Contact Configuration

02

Enclosure

L

B = Palm button, 40 mm button, 22 mm hole

M = Metal base button

02 = 2 NC


11 = 1 NO/1 NC

12 = 1 NO/2 NC

L = Yellow ring label "Emergency Stop", without enclosure

E = Yellow ring label "Emergency Stop", with enclosure


Rope Pull E-Stop Devices



| Maximum Rope Length | Rope Connection | Safety Contacts | Auxiliary Contacts | Actuation | Housing Material | Models |
|---------------------|---------------------|-----------------|--------------------|-----------|------------------|---------------|
| 38 m | Built-in turnbuckle | 2 NC in | 2 NO in | Latch | Metal, IP67 | RP-RM83F-38LT |
| 75 m | | | | | | RP-RM83F-75LT |
| 38 m | Ring connection | | | | | RP-RM83F-38LR |
| 75 m | | | | | | RP-RM83F-75LR |
| 25 m | Built-in turnbuckle | | | | Plastic | RP-LS42F-25LE |
| 37.5 m | | | | | | RP-LS42F-38LE |
| 75 m | | | | | | RP-LS42F-75LE |


Note: For auxiliary status output models add E to the end of the model number (example, RP-RM83F-38LTE)

Rope Pull Switches




| Maximum Rope Length | Rope Connection | Safety Contacts | Auxiliary Contacts | Actuation | Housing Material | Models | | | | |
|------------------------|---------------------|-----------------|--------------------|-----------|------------------|---------------|---------|-------|---------|---------------|
| 25 m | Ring connection | 2 NC in | 2 NO in | Latch | Plastic | RP-LS42F-25L | | | | |
| 37.5 m | | | | | | RP-LS42F-38L | | | | |
| 75 m | | | | | | RP-LS42F-75L | | | | |
| 25 m | Built-in turnbuckle | | | | | 2 NC in | 2 NO in | Latch | Plastic | RP-LS42F-25LF |
| 37.5 m | | | | | | | | | | RP-LS42F-38LF |
| 75 m | | | | | | | | | | RP-LS42F-75LF |
| 6 m | — | 2 NC in | — | Latch | Metal | | | | | RP-QM72D-6L |
| 12 m | | | | | | | | | | RP-QM72D-12L |
| 20 m | | | | | | | | | | RP-QM72D-20L |
| 12 m | | 4 NC in | 1 NO in | | | RP-QMT72F-12L | | | | |
| | | RP-QMT72E-12L | | | | | | | | |
| 6 m | — | 2 NC in | — | Trip | | RP-LM40D-6 | | | | |
| | | | | | | RP-LM40D-6L | | | | |
| 100 m (50 m each side) | — | | 2 NO in | Latch | | RP-QM90F-100L | | | | |

Components for Wire Rope Assembly




RPA-C

Wire Ropes




RPA-T

Thimbles




RPA-CC

Clamps




RPA-TA

Turnbuckles




RPA-EB

Eye Bolts




RPA-P

Pulleys



RPA-DP

Deflection Pulleys



RPA-S

Tensioning Springs

Hardware kits are available (RPAK)



Smarter Automation. Better Solutions.™

Banner Engineering designs and manufactures industrial automation products including sensors, smart IIoT and industrial wireless technologies, LED lights and indicators, measurement devices, machine safety equipment, as well as barcode scanners and machine vision. These solutions help make many of the things we use every day, from food and medicine to cars and electronics. A high-quality, reliable Banner product is installed somewhere around the world every two seconds. Headquartered in Minneapolis since 1966, Banner is an industry leader with more than 10,000 products, operations on five continents, and a worldwide team of more than 5,500 employees and partners. Our dedication to innovation and personable service makes Banner a trusted source of smart automation technologies to customers around the globe.

