



# K50 Pro Select Optical Sensor with IO-Link Product Manual

Original Instructions

p/n: 246257 Rev. A

24-Apr-25

© Banner Engineering Corp. All rights reserved. [www.bannerengineering.com](http://www.bannerengineering.com)

# Contents

<b>Chapter 1 Features .....</b>	<b>3</b>
Models .....	3
Overview .....	3
Class 1 Laser Description and Safety Information .....	4
<b>Chapter 2 Wiring.....</b>	<b>6</b>
<b>Chapter 3 IO-Link® .....</b>	<b>7</b>
IO-Link Process Data In (Device to Master) .....	7
IO-Link Process Data Out (Master to Device) .....	7
IO-Link Data Map .....	9
Communication Parameters .....	9
Process Data: Multicolor .....	9
Process Data: Four State Full Logic .....	11
Process Data: Advanced .....	12
Process Data: LED Control.....	14
Process Data: Distance .....	17
Parameters Set Using IO-Link .....	18
IO-Link Events .....	21
<b>Chapter 4 Specifications .....</b>	<b>23</b>
FCC Part 15 Class B for Unintentional Radiators.....	24
Industry Canada ICES-003(B).....	24
Dimensions .....	25
Beam Pattern.....	25
<b>Chapter 5 Accessories.....</b>	<b>26</b>
Cordsets .....	26
Brackets .....	26
Elevated Mount System.....	28
<b>Chapter 6 Product Support and Maintenance .....</b>	<b>29</b>
Clean with Mild Detergent and Water .....	29
Repairs .....	29
Contact Us.....	29
Banner Engineering Corp Limited Warranty .....	29

Chapter Contents

Models .....	3
Overview .....	3
Class 1 Laser Description and Safety Information .....	4

# Chapter 1      Features

50 mm Programmable Multicolor RGB Optical Sensor and Indicator



- Three default colors in one device (Green, Red, Yellow)
- Devices are completely self-contained—no controller needed
- Teachable modes with color feedback for ease of use
- Touchless activation removes the need for physical force to activate
- Rugged IP66, IP67, IP69K per ISO 20653 and UL Type 4X and UL Type 13 design
- Resistant to ambient light, EMI, and RFI interference
- Sensing and indication in one device
- Bright, uniform indicator light
- Translucent polycarbonate dome

**WARNING:**



- **Do not use this device for personnel protection**
- Using this device for personnel protection could result in serious injury or death.
- This device does not include the self-checking redundant circuitry necessary to allow its use in personnel safety applications. A device failure or malfunction can cause either an energized (on) or de-energized (off) output condition.

## Models

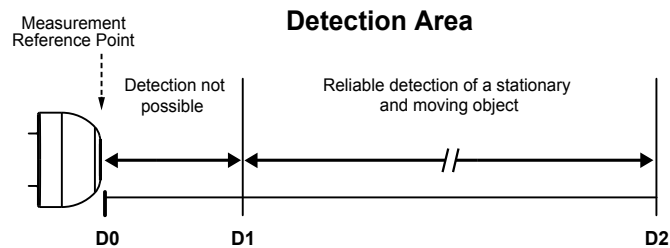
Family	Style	Color and Input	Connector <sup>(1)</sup>
K50PS	AF1000	K	Q
	AF1000 = 1000 mm Adjustable Field Sensor	K = IO-Link	Q = Integral 4-pin M12 male quick-disconnect connector

## Overview

The K50 Pro Select Optical Sensor with IO-Link is an adjustable field optical sensor that can detect a wide variety of materials and objects.

Configure the sensor using software or remote input wires to sense objects up to a specific distance, ignoring objects beyond this distance (background suppression), or within a windowed range.

<sup>(1)</sup> Models with a quick-disconnect connector require a mating cordset.



Model	D0 (mm)	Switch Point D1 (mm)	Switch Point D2 (mm)
K50PSAF1000KQ	0	20	1000

## Class 1 Laser Description and Safety Information



**Laser light. Do not stare into the beam.**

Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 56, dated May 8, 2019.

**CLASS 1  
LASER PRODUCT**

### CAUTION:



- **Never stare directly into the sensor lens.**
- Laser light can damage your eyes.
- Avoid placing any mirror-like object in the beam. Never use a mirror as a retroreflective target.

### CAUTION:



- **Return defective units to the manufacturer.**
- Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.
- Do not attempt to disassemble this sensor for repair. A defective unit must be returned to the manufacturer.

### CAUTION:



- **Ne regardez jamais directement la lentille du capteur.**
- La lumière laser peut endommager la vision.
- Évitez de placer un objet réfléchissant (de type miroir) dans la trajectoire du faisceau. N'utilisez jamais de miroir comme cible rétro-réfléchissante.

### CAUTION:



- **Tout dispositif défectueux doit être renvoyé au fabricant.**
- L'utilisation de commandes, de réglages ou de procédures autres que celles décrites dans le présent document peut entraîner une exposition dangereuse aux radiations.
- N'essayez pas de démonter ce capteur pour le réparer. Tout dispositif défectueux doit être renvoyé au fabricant.

Class 1 lasers are lasers that are safe under reasonably foreseeable conditions of operation, including the use of optical instruments for intrabeam viewing.

Complies with IEC 60825-1:2014 and EN 60825-1:2014+A11:2021.

**For safe laser use:**

- Do not stare at the laser.
- Do not point the laser at a person's eye.
- Mount open laser beam paths either above or below eye level, where practical.
- Terminate the beam emitted by the laser product at the end of its useful path.

Chapter 2

Wiring

Diagram	Pinout
	 <p>1 = Brown (bn) 2 = White (wh) 3 = Blue (bu) 4 = Black (bk)</p>

## Chapter Contents

IO-Link Process Data In (Device to Master).....	7
IO-Link Process Data Out (Master to Device).....	7
IO-Link Data Map .....	9

## Chapter 3 IO-Link®

IO-Link® is a point-to-point communication link between a master device and a sensor and/or light. It can be used to automatically parameterize sensors or lights and to transmit process data. For the latest IO-Link protocol and specifications, please visit [www.io-link.com](http://www.io-link.com).

For the latest IODD files, please refer to the Banner Engineering Corp website at: [www.bannerengineering.com](http://www.bannerengineering.com).

### IO-Link Process Data In (Device to Master)

Use process data to read the device output state. When the device is in Four State Full Logic mode, use process data to read the device logic state in addition to the output state.

Name	Description
<b>Output State</b>	Output state follows touch, optical sensor, or push button input
<b>Device State</b>	Current state (State 1, State 2, State 3, State 4). Only available with Operation Mode set to Four State Full Logic, Multicolor, or Coarse Distance

### IO-Link Process Data Out (Master to Device)

Use process data out to define device states. Use parameter data to define device modes, states, output settings, and custom colors.

#### Multicolor Mode

Use process data to activate the defined device state. Use parameter data to define output settings, control delays, color, intensity, flash, and other animation types for State 1, State 2, State 3, and State 4.

#### Four State Full Logic Mode

Use process data to define the Job Input state and device state (State 1, State 2, State 3, State 4). See below for more information about how to achieve legacy logic types (C, D, E, and H). Use parameter data to change color, intensity, flash, speed, select animation type, and define output settings.

#### Advanced Mode

Use process data to control delays, color, intensity, flash, and other animation types. Process data is also used to control the sequence value dynamically. Use parameter data to create custom colors, intensity, speeds, and to define output settings.

*Definitions for device states in Multicolor Mode, Four State Full Logic Mode, and Advanced Mode*

Name	Description
<b>Animation Type</b>	
Off	Indicator is off
Steady	Color 1 is solid on at defined intensity
Flash	Color 1 flashes at defined speed, color intensity, and pattern
Two Color Flash	Color 1 and Color 2 flash alternately at defined speed, color intensities, and pattern
50/50	Color 1 is displayed on 50% of the indicator and Color 2 is displayed on the other 50% of the indicator at the defined color intensities

Continued on page 8

Continued from page 7

Name	Description
50/50 Rotate	Color 1 is displayed on 50% of the indicator and Color 2 is displayed on the other 50% of the indicator while rotating at the defined speed, color intensities, and rotational direction
Chase	Color 1 is displayed as a single spot against the background of Color 2 while rotating at the defined speed, color intensities, and rotational direction
Intensity Sweep	Color 1 repeatedly increases and decreases intensity between 0% to 100% at defined speed and color intensity
Color Sweep	Color 1 and Color 2 transition alternately at defined speed and color intensities
Sequence	Color 1 increments against the background of Color 2 at defined Dynamic or Static Sequence Value (Advanced mode and other modes respectively)
Wave	Color 2 increments across the background of Color 1
Double Wave	Color 2 increments across the background of Color 1, and then the reverse occurs
Animation Direction	Defines the direction of rotation for the 50/50 rotate, chase, and sequence animations (CW or CCW)
Animation Pattern	Defines the flash pattern for flash and two color flash animations (normal, strobe, three pulse, SOS, or random); also defines the pattern of the vibration feedback
Animation Speed	Defines the animation speed (slow, medium, fast, or custom); also defines the speed of the vibration feedback pattern
Off Delay Type	Defines if the Off Delay should be measured from when the conditions for the State began (Leading Edge) or from when the conditions ended (Trailing Edge)
Off Delay (ms)	The duration of the animation Off Delay. Leading Edge Off Delays can be used to ensure the animation is active for at least a minimum amount of time.
Static Sequence Value	Defines the span of Color 1 in the Sequence animation [0-255]. 0 means no portion of the animation will be Color 1, and it increases in a circular manner to 255 which indicates the full circumference will be Color 1. In Advanced Mode, this is in process data and is called Dynamic Sequence Value. In the other modes, this is in parameter data and is called Static Sequence Value.
Sequence Start Location	Shifts the beginning of the sequence animation to the specified LED (LED1 at 12 o'clock continuing in the direction indicated by the Animation Direction parameter)
Color 1	Defines Color 1 of defined animation
Color 1 Intensity	Defines the intensity of Color 1 in the animation (high, medium, low, off, or custom)
Color 2	Defines Color 2 of defined animation
Color 2 Intensity	Defines the intensity of Color 2 in the animation (high, medium, low, off, or custom)

### LED Control Mode

Use process data to define the color and intensity of each individual LED. Use parameter data to define customer colors and intensities. LED1 is oriented at the 12 o'clock position, continuing clockwise through LED8 near 11 o'clock position.

### Distance Mode

Use process data to set the device to operate as a gauge, which allows the user to configure a background color and a fill color to display how far an object is within the Detection Area. As an object moves along the sensing range, the proportion of fill color to background color changes in a clockwise (CW) or counter-clockwise (CCW) direction. The proportion of fill color increases as an object approaches the maximum range, and decreases as it moves towards the minimum.

### Coarse Distance Mode

Use process data to divide the Detection Area into custom zones to generate a unique animation when an object is present within that zone distance. Configure up to five zones for animation and output state. The minimum zone distance is 50 mm.

### Demo Mode

The device cycles through color spectrum, 50/50 rotate, intensity sweep, and sequence mode. It also speeds the cycle rate up or down (can be either Momentary or Latching), and initiates a state showing individually colored LEDs. When set



to demo mode, the device cycles through the defined sequence when power is applied regardless of its connection to an IO-Link master.

## IO-Link Data Map

This section refers to the following IODD file: Banner\_Engineering-K50PSAF1000KQ-20250107-IODD1.1-en.html. The IODD file and support files can be found on [www.bannerengineering.com](http://www.bannerengineering.com) under the download section of the product family page.

## Communication Parameters

The following communication parameters are used.

Parameter	Value	Parameter	Value
IO-Link revision	V1.1	Port class	A
Process data in length	32 bits	SIO mode	No
Process data out length	320 bits	Smart sensor profile	Yes
Bit rate	38400 bps	Block parameterization	Yes
Minimum cycle time	5 ms	Data storage	Yes
Device ID	0×060012		

## Process Data: Multicolor

ProcessData id=V\_Pd\_Multicolor (condition V\_OperationMode == 0)

### IO-Link Process Data In (Device to Master)

ProcessDataIn id=V\_Pd\_InMulticolor

- Bit Length: 32
- Data Type: 32-bit Record (subindex access not supported)

Subindex	Bit Offset	Data Type	Allowed Values	Name	Description
1	24	Boolean	false = Inactive, true = Active	Output State	Output State. Related parameters are defined in output and touch settings parameter data.
2	16	3-bit UInteger	0 = State 1, 1 = State 2, 2 = State 3, 3 = State 4	State	Output State. Related parameters are defined in output and touch settings parameter data.
3	0	16-bit UInteger		Distance	The measured distance in millimeters.

Octet 0								
Bit offset	31	30	29	28	27	26	25	24
Subindex	-	-	-	-	-	-	-	1

Octet 1								
Bit offset	23	22	21	20	19	18	17	16
Subindex	-	-	-	-	-	2		
Element bit						2	1	0

Octet 2								
Bit offset	15	14	13	12	11	10	9	8
Subindex	3							
Element bit	15	14	13	12	11	10	9	0

Octet 3								
Bit offset	7	6	5	4	3	2	1	0

Continued on page 10

Continued from page 9

Octet 3								
Subindex	3							
Element bit	7	6	5	4	3	2	1	0

**IO-Link Process Data Out (Master to Device)**

ProcessDataOut id=V\_Pd\_OutMulticolor

- Bit Length: 64
- Data Type: 64-bit Record (subindex access not supported)

Subindex	Bit Offset	Data Type	Allowed Values	Name	Description
1	56	3-bit UInteger	0 = State 1, 1 = State 2, 2 = State 3, 3 = State 4	State	Animation State. Related parameters are defined in Four State Full Logic/Multicolor parameter data.

Octet 0								
Bit offset	63	62	61	60	59	58	57	56
Subindex	-	-	-	-	-	1		
Element bit						2	1	0

Octet 1								
Bit offset	55	54	53	52	51	50	49	48
Subindex	-	-	-	-	-	-	-	-

Octet 2								
Bit offset	47	46	45	44	43	42	41	40
Subindex	-	-	-	-	-	-	-	-

Octet 3								
Bit offset	39	38	37	36	35	34	33	32
Subindex	-	-	-	-	-	-	-	-

Octet 4								
Bit offset	31	30	29	28	27	26	25	24
Subindex	-	-	-	-	-	-	-	-

Octet 5								
Bit offset	23	22	21	20	19	18	17	16
Subindex	-	-	-	-	-	-	-	-

Octet 6								
Bit offset	15	14	13	12	11	10	9	8
Subindex	-	-	-	-	-	-	-	-

Octet 7								
Bit offset	7	6	5	4	3	2	1	0
Subindex	-	-	-	-	-	-	-	-

## Process Data: Four State Full Logic

ProcessData id=V\_Pd\_FourStateFullLogic (condition V\_OperationMode == 1)

### IO-Link Process Data In (Device to Master)

ProcessDataIn id=V\_Pd\_InFourStateFullLogic

- Bit Length: 32
- Data Type: 32-bit Record (subindex access not supported)

Subindex	Bit Offset	Data Type	Allowed Values	Name	Description
1	24	Boolean	false = Inactive, true = Active	Output State	Output State. Related parameters are defined in output and touch settings parameter data.
2	16	2-bit UInteger	0 = State 1, 1 = State 2, 2 = State 3, 3 = State 4	State	Animation State. Related parameters are defined in Four State Full Logic/Multicolor parameter data.
3	0	16-bit UInteger		Distance	The measured distance in millimeters.

Octet 0								
Bit offset	31	30	29	28	27	26	25	24
Subindex	-	-	-	-	-	-	-	1

Octet 1								
Bit offset	23	22	21	20	19	18	17	16
Subindex	-	-	-	-	-	-	2	
Element bit							1	0

Octet 2								
Bit offset	15	14	13	12	11	10	9	8
Subindex	3							
Element bit	15	14	13	12	11	10	9	8

Octet 3								
Bit offset	7	6	5	4	3	2	1	0
Subindex	3							
Element bit	7	6	5	4	3	2	1	0

### IO-Link Process Data Out (Master to Device)

ProcessDataOut id=V\_Pd\_OutFourStateFullLogic

- Bit Length: 64
- Data Type: 64-bit Record (subindex access not supported)

Subindex	Bit Offset	Data Type	Allowed Values	Name	Description
1	56	Boolean	false = Off, true = On	Job Input	The Job Input for Four State Full Logic mode.

Octet 0								
Bit offset	63	62	61	60	59	58	57	56
Subindex	-	-	-	-	-	-	-	1

Octet 1								
Bit offset	55	54	53	52	51	50	49	48
Subindex	-	-	-	-	-	-	-	-

Octet 2								
Bit offset	47	46	45	44	43	42	41	40
Subindex	-	-	-	-	-	-	-	-

Octet 3								
Bit offset	39	38	37	36	35	34	33	32
Subindex	-	-	-	-	-	-	-	-

Octet 4								
Bit offset	31	30	29	28	27	26	25	24
Subindex	-	-	-	-	-	-	-	-

Octet 5								
Bit offset	23	22	21	20	19	18	17	16
Subindex	-	-	-	-	-	-	-	-

Octet 6								
Bit offset	15	14	13	12	11	10	9	8
Subindex	-	-	-	-	-	-	-	-

Octet 7								
Bit offset	7	6	5	4	3	2	1	0
Subindex	-	-	-	-	-	-	-	-

## Process Data: Advanced

ProcessData id=V\_Pd\_Advanced (condition V\_OperationMode == 2)

### IO-Link Process Data In (Device to Master)

ProcessDataIn id=V\_Pd\_InAdvanced

- Bit Length: 32
- Data Type: 32-bit Record (subindex access not supported)

Subindex	Bit Offset	Data Type	Allowed Values	Name	Description
1	24	Boolean	false = Inactive, true = Active	Output State	Output State. Related parameters are defined in output and touch settings parameter data.
2	0	16-bit UInteger		Distance	The measured distance in millimeters.

Octet 0								
Bit offset	31	30	29	28	27	26	25	24
Subindex	-	-	-	-	-	-	-	1

Octet 1								
Bit offset	23	22	21	20	19	18	17	16
Subindex	-	-	-	-	-	-	-	-

Octet 2								
Bit offset	15	14	13	12	11	10	9	8
Subindex	2							

Continued on page 13

Continued from page 12

Octet 2								
Element bit	15	14	13	12	11	10	9	8

Octet 3								
Bit offset	7	6	5	4	3	2	1	0
Subindex	2							
Element bit	7	6	5	4	3	2	1	0

**IO-Link Process Data Out (Master to Device)**

ProcessDataOut id=V\_Pd\_OutAdvanced

- Bit Length: 64
- Data Type: 64-bit Record (subindex access not supported)

Subindex	Bit Offset	Data Type	Allowed Values	Name	Description
1	56	4-bit UInteger	0 = Off, 1 = Steady, 2 = Flash, 3 = Two Color Flash, 4 = 50/50, 5 = 50/50 Rotate, 6 = Chase, 7 = Intensity Sweep, 8 = Color Sweep, 9 = Sequence, 10 = Wave, 11 = Double Wave	Animation Type	The animation type
2	60	Boolean	false = CW, true = CCW	Animation Direction	The direction the animation rotates
3	61	3-bit UInteger	0 = Flash, 1 = Strobe, 2 = Three Pulse, 3 = SOS, 4 = Random	Animation Pattern	The pattern of the animation
4	48	2-bit UInteger	0 = Slow, 1 = Medium, 2 = Fast, 3 = Custom	Animation Speed	The speed of the animation
5	24	8-bit UInteger	0..255	Static Sequence Value (0-255)	The value that describes the LED position of the device. LED state is defined in Parameters Set Using IO-Link.
6	16	3-bit UInteger	0 = LED 1, 1 = LED 2, 2 = LED 3, 3 = LED 4, 4 = LED 5, 5 = LED 6, 6 = LED 7, 7 = LED 8	Sequence Start Location	Defines the LED location where the sequence animation is initiated.
7	8	5-bit UInteger	0 = Green, 1 = Red, 2 = Orange, 3 = Amber, 4 = Yellow, 5 = Lime Green, 6 = Spring Green, 7 = Cyan, 8 = Sky Blue, 9 = Blue, 10 = Violet, 11 = Magenta, 12 = Rose, 13 = White, 14 = Custom 1, 15 = Custom 2	Color 1	The main color of the animation. Custom Colors are defined in Parameters Set Using IO-Link.
8	13	3-bit UInteger	0 = High, 1 = Medium, 2 = Low, 3 = Off, 4 = Custom	Color 1 Intensity	The intensity of Color 1. Custom Intensity is defined in Parameters Set Using IO-Link.
9	0	5-bit UInteger	0 = Green, 1 = Red, 2 = Orange, 3 = Amber, 4 = Yellow, 5 = Lime Green, 6 = Spring Green, 7 = Cyan, 8 = Sky Blue, 9 = Blue, 10 = Violet, 11 = Magenta, 12 = Rose, 13 = White, 14 = Custom 1, 15 = Custom 2	Color 2	The secondary color of the animation. Custom Colors are defined in Parameters Set Using IO-Link.
10	5	3-bit UInteger	0 = High, 1 = Medium, 2 = Low, 3 = Off, 4 = Custom	Color 2 Intensity	The intensity of Color 2. Custom Intensity is defined in Parameters Set Using IO-Link.

Octet 0								
Bit offset	63	62	61	60	59	58	57	56
Subindex	3			2	1			
Element Bit	2	1	0		3	2	1	0

Octet 1								
Bit offset	55	54	53	52	51	50	49	48
Subindex	-	-	-	-	-	-	4	

Continued on page 14

Continued from page 13

Octet 1								
Element Bit							1	0

Octet 2								
Bit offset	47	46	45	44	43	42	41	40
Subindex	-	-	-	-	-	-	-	-

Octet 3								
Bit offset	39	38	37	36	35	34	33	32
Subindex	-	-	-	-	-	-	-	-

Octet 4								
Bit offset	31	30	29	28	27	26	25	24
Subindex	5							
Element Bit	7	6	5	4	3	2	1	0

Octet 5								
Bit offset	23	22	21	20	19	18	17	16
Subindex	-	-	-	-	-	6		
Element Bit						2	1	0

Octet 6								
Bit offset	15	14	13	12	11	10	9	8
Subindex	8			7				
Element Bit	2	1	0	4	3	2	1	0

Octet 7								
Bit offset	7	6	5	4	3	2	1	0
Subindex	10			9				
Element Bit	2	1	0	4	3	2	1	0

## Process Data: LED Control

ProcessData id=V\_Pd\_LedControl (condition V\_OperationMode == 3)

### IO-Link Process Data In (Device to Master)

ProcessDataIn id=V\_Pd\_InLedControl

- Bit Length: 32
- Data Type: 32-bit Record (subindex access not supported)

Subindex	Bit Offset	Data Type	Allowed Values	Name	Description
1	24	Boolean	false = Inactive, true = Active	Output State	Output State. Related parameters are defined in output and touch settings parameter data.
2	0	16-bit UInteger		Distance	The measured distance in millimeters.

Octet 0								
Bit offset	31	30	29	28	27	26	25	24
Subindex	-	-	-	-	-	-	-	1

Octet 1								
Bit offset	23	22	21	20	19	18	17	16
Subindex	-	-	-	-	-	-	-	-

Octet 2								
Bit offset	15	14	13	12	11	10	9	8
Subindex	2							
Element bit	15	14	13	12	11	10	9	8

Octet 3								
Bit offset	7	6	5	4	3	2	1	0
Subindex	2							
Element bit	7	6	5	4	3	2	1	0

### IO-Link Process Data Out (Master to Device)

ProcessDataOut id=V\_Pd\_OutLedControl

- Bit Length: 64
- Data Type: 64-bit Record (subindex access not supported)

Subindex	Bit Offset	Data Type	Allowed Values	Name	Description
1	56	4-bit UInteger	0 = Green, 1 = Red, 2 = Orange, 3 = Amber, 4 = Yellow, 5 = Lime Green, 6 = Spring Green, 7 = Cyan, 8 = Sky Blue, 9 = Blue, 10 = Violet, 11 = Magenta, 12 = Rose, 13 = White, 14 = Custom 1, 15 = Custom 2	LED 1 Color	Defines the color of the designated LED. LED 1 is oriented at the 12 o'clock position.
2	60	4-bit UInteger	0..10	LED 1 Intensity (0-10)	Defines the intensity of the designated LED
3	48	4-bit UInteger	0 = Green, 1 = Red, 2 = Orange, 3 = Amber, 4 = Yellow, 5 = Lime Green, 6 = Spring Green, 7 = Cyan, 8 = Sky Blue, 9 = Blue, 10 = Violet, 11 = Magenta, 12 = Rose, 13 = White, 14 = Custom 1, 15 = Custom 2	LED 2 Color	Defines the color of the designated LED
4	52	4-bit UInteger	0..10	LED 2 Intensity (0-10)	Defines the intensity of the designated LED
5	40	4-bit UInteger	0 = Green, 1 = Red, 2 = Orange, 3 = Amber, 4 = Yellow, 5 = Lime Green, 6 = Spring Green, 7 = Cyan, 8 = Sky Blue, 9 = Blue, 10 = Violet, 11 = Magenta, 12 = Rose, 13 = White, 14 = Custom 1, 15 = Custom 2	LED 3 Color	Defines the color of the designated LED
6	44	4-bit UInteger	0..10	LED 3 Intensity (0-10)	Defines the intensity of the designated LED
7	32	4-bit UInteger	0 = Green, 1 = Red, 2 = Orange, 3 = Amber, 4 = Yellow, 5 = Lime Green, 6 = Spring Green, 7 = Cyan, 8 = Sky Blue, 9 = Blue, 10 = Violet, 11 = Magenta, 12 = Rose, 13 = White, 14 = Custom 1, 15 = Custom 2	LED 4 Color	Defines the color of the designated LED
8	36	4-bit UInteger	0..10	LED 4 Intensity (0-10)	Defines the intensity of the designated LED
9	24	4-bit UInteger	0 = Green, 1 = Red, 2 = Orange, 3 = Amber, 4 = Yellow, 5 = Lime Green, 6 = Spring Green, 7 = Cyan, 8 = Sky Blue, 9 = Blue, 10 = Violet, 11 = Magenta, 12 = Rose, 13 = White, 14 = Custom 1, 15 = Custom 2	LED 5 Color	Defines the color of the designated LED

Continued on page 16

Continued from page 15

Subindex	Bit Offset	Data Type	Allowed Values	Name	Description
10	28	4-bit UInteger	0..10	LED 5 Intensity (0-10)	Defines the intensity of the designated LED
11	16	4-bit UInteger	0 = Green, 1 = Red, 2 = Orange, 3 = Amber, 4 = Yellow, 5 = Lime Green, 6 = Spring Green, 7 = Cyan, 8 = Sky Blue, 9 = Blue, 10 = Violet, 11 = Magenta, 12 = Rose, 13 = White, 14 = Custom 1, 15 = Custom 2	LED 6 Color	Defines the color of the designated LED
12	20	4-bit UInteger	0..10	LED 6 Intensity (0-10)	Defines the intensity of the designated LED
13	8	4-bit UInteger	0 = Green, 1 = Red, 2 = Orange, 3 = Amber, 4 = Yellow, 5 = Lime Green, 6 = Spring Green, 7 = Cyan, 8 = Sky Blue, 9 = Blue, 10 = Violet, 11 = Magenta, 12 = Rose, 13 = White, 14 = Custom 1, 15 = Custom 2	LED 7 Color	Defines the color of the designated LED
14	12	4-bit UInteger	0..10	LED 7 Intensity (0-10)	Defines the intensity of the designated LED
15	0	4-bit UInteger	0 = Green, 1 = Red, 2 = Orange, 3 = Amber, 4 = Yellow, 5 = Lime Green, 6 = Spring Green, 7 = Cyan, 8 = Sky Blue, 9 = Blue, 10 = Violet, 11 = Magenta, 12 = Rose, 13 = White, 14 = Custom 1, 15 = Custom 2	LED 8 Color	Defines the color of the designated LED
16	4	4-bit UInteger	0..10	LED 8 Intensity (0-10)	Defines the intensity of the designated LED

Octet 0								
Bit offset	63	62	61	60	59	58	57	56
Subindex	2				1			
Element Bit	3	2	1	0	3	2	1	0

Octet 1								
Bit offset	55	54	53	52	51	50	49	48
Subindex	4				3			
Element Bit	3	2	1	0	3	2	1	0

Octet 2								
Bit offset	47	46	45	44	43	42	41	40
Subindex	6				5			
Element Bit	3	2	1	0	3	2	1	0

Octet 3								
Bit offset	39	38	37	36	35	34	33	32
Subindex	8				7			
Element Bit	3	2	1	0	3	2	1	0

Octet 4								
Bit offset	31	30	29	28	27	26	25	24
Subindex	10				9			
Element Bit	3	2	1	0	3	2	1	0



Octet 5								
Bit offset	23	22	21	20	19	18	17	16
Subindex	12				11			
Element Bit	3	2	1	0	3	2	1	0

Octet 6								
Bit offset	15	14	13	12	11	10	9	8
Subindex	14				13			
Element Bit	3	2	1	0	3	2	1	0

Octet 7								
Bit offset	7	6	5	4	3	2	1	0
Subindex	16				15			
Element Bit	3	2	1	0	3	2	1	0

## Process Data: Distance

ProcessData id=V\_Pd\_Distance (condition V\_OperationMode == 5)

### IO-Link Process Data In (Device to Master)

ProcessDataIn id=V\_Pd\_InDistance

- Bit Length: 32
- Data Type: 32-bit Record (subindex access not supported)

Subindex	Bit Offset	Data Type	Allowed Values	Name	Description
1	24	Boolean	false = Inactive, true = Active	Output State	Output State. Related parameters are defined in output and touch settings parameter data.
2	0	16-bit UInteger		Distance	The measured distance in millimeters.

Octet 0								
Bit offset	31	30	29	28	27	26	25	24
Subindex	-	-	-	-	-	-	-	1

Octet 1								
Bit offset	23	22	21	20	19	18	17	16
Subindex	-	-	-	-	-	-	-	-

Octet 2								
Bit offset	15	14	13	12	11	10	9	8
Subindex	2							
Element bit	15	14	13	12	11	10	9	8

Octet 3								
Bit offset	7	6	5	4	3	2	1	0
Subindex	2							
Element bit	7	6	5	4	3	2	1	0

### IO-Link Process Data Out (Master to Device)

ProcessDataOut id=V\_Pd\_OutDistance

- Bit Length: 64

- Data Type: 64-bit Record (subindex access not supported)

Subindex	Bit Offset	Data Type	Allowed Values	Name	Description
1	56	2-bit UInteger	0	Reserved	Reserved

Octet 0								
Bit offset	63	62	61	60	59	58	57	56
Subindex	-	-	-	-	-	-	1	
Element bit							1	0

Octet 1								
Bit offset	55	54	53	52	51	50	49	48
Subindex	-	-	-	-	-	-	-	-

Octet 2								
Bit offset	47	46	45	44	43	42	41	40
Subindex	-	-	-	-	-	-	-	-

Octet 3								
Bit offset	39	38	37	36	35	34	33	32
Subindex	-	-	-	-	-	-	-	-

Octet 4								
Bit offset	31	30	29	28	27	26	25	24
Subindex	-	-	-	-	-	-	-	-

Octet 5								
Bit offset	23	22	21	20	19	18	17	16
Subindex	-	-	-	-	-	-	-	-

Octet 6								
Bit offset	15	14	13	12	11	10	9	8
Subindex	-	-	-	-	-	-	-	-

Octet 7								
Bit offset	7	6	5	4	3	2	1	0
Subindex	-	-	-	-	-	-	-	-

## Parameters Set Using IO-Link

Index	Subindex	Name	Length	Value Range	Default	Access Rights	Data Storage?
0	1-16	Direct Parameters 1	128			rw	
1	1-16	Direct Parameters 2	128			rw	
2		Standard Command	8	65 = Teach Object Mode 66 = Teach Background Mode 67 = Teach Window Mode 68 = Teach Cancel 69 = Teach Off 130 = Restore Factory Settings		wo	

Continued on page 19

Continued from page 18

Index	Subindex	Name	Length	Value Range	Default	Access Rights	Data Storage?
3-11							
12		<b>Direct Access Locks</b>	16				
	1	Parameter (write) Access Lock	1	0 = Off, 1 = On	False	rw	y
	2	Data Storage Lock	1	0 = Off, 1 = On	False	rw	y
	3	Local Parameterization Lock	1	0 = Off, 1 = On		rw	y
	4	Local User Interface Lock	1	0 = Off, 1 = On		rw	y
13-15							
16		Vendor Name string	240	Banner Engineering Corporation		ro	
17		Vendor Text string	232	More Sensors. More Solutions.		ro	
18		Product Name string	256	K50		ro	
19		Product ID string	256	K50PSAF1000KQ		ro	
20		Product Text string	256	K50 ToF with IOL		ro	
21		Serial Number	128			ro	
22		Hardware Version	512			ro	
23		Firmware Version	128			ro	
24		App Specific Tag (user defined)	256			rw	y
25-35							
36		Device Status	8	0 = Device is OK 1 = Maintenance required 2 = Out of specification 3 = Functional check 4 = Failure 5-255 = Reserved		ro	
37		Detailed Device Status	Array[6] of 3- octet			ro	
38-79							
80		Operation Mode	3	0 = Multicolor 1 = Full State Full Logic 2 = Advanced 3 = LED Control 4 = Demo	2	rw	y
81		<b>Setting</b>	24				
	1	Custom Intensity (0 - 100%)	8	0..100	100	rw	y
	2	Custom Flash Rate (0.5 - 25.5 Hz)	8	5..255	15	rw	y
	3	Restrict To Gamut	8	0 = Off, 1 = On	0	rw	y
82		<b>User Input Settings</b>	56				
	1	Function	1	false = Momentary, true = Latched	False	rw	
	2	Mute Enable	1	false = Off, true = On	False	rw	
	3	On Delay (ms)	16	0..65535	0	rw	
	4	Target Threshold Low (mm)	16	20..1500	20	rw	
	5	Target Threshold High(mm)	16	20..1500	500	rw	
83		<b>Output Settings</b>	24				
	1	Output State	1	false = Normally Closed, true = Normally Open	True	rw	
	2	Off Delay Type	1	false = Leading Edge, true = Trailing Edge	False	rw	
	3	Off Delay (ms)	16	0..65535	0	rw	
84		<b>State 1 Parameters</b>					
	1	Animation Type	4	0 = Off, 1 = Steady, 2 = Flash, 3 = Two Color Flash, 4 = 50/50, 5 = 50/50 Rotate, 6 = Chase, 7 = Intensity Sweep, 8 = Color Sweep, 9 = Sequence, 10 = Wave, 11 = Double Wave	1	rw	y
	2	Animation Direction	1	false = CW, true = CCW	False	rw	y

Continued on page 20

Continued from page 19

Index	Subindex	Name	Length	Value Range	Default	Access Rights	Data Storage?
	3	Animation Pattern	3	0 = Flash, 1 = Strobe, 2 = Three Pulse, 3 = SOS, 4 = Random	0	rw	y
	4	Animation Speed	2	0 = Slow, 1 = Medium, 2 = Fast, 3 = Custom	1	rw	y
	5	Reserved	2	0	0	rw	y
	6	Off Delay Type	1	false = Leading Edge, true = Trailing Edge	False	rw	y
	7	Off Delay (ms)	16	0..65535	0	rw	y
	8	Static Sequence Value (0-255)	8	0..255	0	rw	y
	9	Sequence Start Location	3	0 = LED 1, 1 = LED 2, 2 = LED 3, 3 = LED 4, 4 = LED 5, 5 = LED 6, 6 = LED 7, 7 = LED 8	0	rw	y
	10	Color 1	5	0 = Green, 1 = Red, 2 = Orange, 3 = Amber, 4 = Yellow, 5 = Lime Green, 6 = Spring Green, 7 = Cyan, 8 = Sky Blue, 9 = Blue, 10 = Violet, 11 = Magenta, 12 = Rose, 13 = White, 14 = Custom 1, 15 = Custom 2	0	rw	y
	11	Color 1 Intensity	3	0 = High, 1 = Medium, 2 = Low, 3 = Off, 4 = Custom	0	rw	y
	12	Color 2	5	0 = Green, 1 = Red, 2 = Orange, 3 = Amber, 4 = Yellow, 5 = Lime Green, 6 = Spring Green, 7 = Cyan, 8 = Sky Blue, 9 = Blue, 10 = Violet, 11 = Magenta, 12 = Rose, 13 = White, 14 = Custom 1, 15 = Custom 2	0	rw	y
	13	Color 2 Intensity	3	0 = High, 1 = Medium, 2 = Low, 3 = Off, 4 = Custom	0	rw	y
85	<b>State 2 Parameters</b>						
	1	Animation Type	4	0 = Off, 1 = Steady, 2 = Flash, 3 = Two Color Flash, 4 = 50/50, 5 = 50/50 Rotate, 6 = Chase, 7 = Intensity Sweep, 8 = Color Sweep, 9 = Sequence, 10 = Wave, 11 = Double Wave	1	rw	y
	2	Animation Direction	1	false = CW, true = CCW	False	rw	y
	3	Animation Pattern	3	0 = Flash, 1 = Strobe, 2 = Three Pulse, 3 = SOS, 4 = Random	0	rw	y
	4	Animation Speed	2	0 = Slow, 1 = Medium, 2 = Fast, 3 = Custom	1	rw	y
	5	Reserved	2	0	0	rw	y
	6	Off Delay Type	1	false = Leading Edge, true = Trailing Edge	False	rw	y
	7	Off Delay (ms)	16	0..65535	0	rw	y
	8	Static Sequence Value (0-255)	8	0..255	0	rw	y
	9	Sequence Start Location	3	0 = LED 1, 1 = LED 2, 2 = LED 3, 3 = LED 4, 4 = LED 5, 5 = LED 6, 6 = LED 7, 7 = LED 8	0	rw	y
	10	Color 1	5	0 = Green, 1 = Red, 2 = Orange, 3 = Amber, 4 = Yellow, 5 = Lime Green, 6 = Spring Green, 7 = Cyan, 8 = Sky Blue, 9 = Blue, 10 = Violet, 11 = Magenta, 12 = Rose, 13 = White, 14 = Custom 1, 15 = Custom 2	0	rw	y
	11	Color 1 Intensity	3	0 = High, 1 = Medium, 2 = Low, 3 = Off, 4 = Custom	0	rw	y
	12	Color 2	5	0 = Green, 1 = Red, 2 = Orange, 3 = Amber, 4 = Yellow, 5 = Lime Green, 6 = Spring Green, 7 = Cyan, 8 = Sky Blue, 9 = Blue, 10 = Violet, 11 = Magenta, 12 = Rose, 13 = White, 14 = Custom 1, 15 = Custom 2	0	rw	y
	13	Color 2 Intensity	3	0 = High, 1 = Medium, 2 = Low, 3 = Off, 4 = Custom	0	rw	y
86	<b>State 3 Parameters</b>						
	1	Animation Type	4	0 = Off, 1 = Steady, 2 = Flash, 3 = Two Color Flash, 4 = 50/50, 5 = 50/50 Rotate, 6 = Chase, 7 = Intensity Sweep, 8 = Color Sweep, 9 = Sequence, 10 = Wave, 11 = Double Wave	1	rw	y
	2	Animation Direction	1	false = CW, true = CCW	False	rw	y
	3	Animation Pattern	3	0 = Flash, 1 = Strobe, 2 = Three Pulse, 3 = SOS, 4 = Random	0	rw	y
	4	Animation Speed	2	0 = Slow, 1 = Medium, 2 = Fast, 3 = Custom	1	rw	y
	5	Reserved	2	0	0	rw	y
	6	Off Delay Type	1	false = Leading Edge, true = Trailing Edge	False	rw	y
	7	Off Delay (ms)	16	0..65535	0	rw	y

Continued on page 21

Continued from page 20

Index	Subindex	Name	Length	Value Range	Default	Access Rights	Data Storage?
	8	Static Sequence Value (0-255)	8	0..255	0	rw	y
	9	Sequence Start Location	3	0 = LED 1, 1 = LED 2, 2 = LED 3, 3 = LED 4, 4 = LED 5, 5 = LED 6, 6 = LED 7, 7 = LED 8	0	rw	y
	10	Color 1	5	0 = Green, 1 = Red, 2 = Orange, 3 = Amber, 4 = Yellow, 5 = Lime Green, 6 = Spring Green, 7 = Cyan, 8 = Sky Blue, 9 = Blue, 10 = Violet, 11 = Magenta, 12 = Rose, 13 = White, 14 = Custom 1, 15 = Custom 2	0	rw	y
	11	Color 1 Intensity	3	0 = High, 1 = Medium, 2 = Low, 3 = Off, 4 = Custom	0	rw	y
	12	Color 2	5	0 = Green, 1 = Red, 2 = Orange, 3 = Amber, 4 = Yellow, 5 = Lime Green, 6 = Spring Green, 7 = Cyan, 8 = Sky Blue, 9 = Blue, 10 = Violet, 11 = Magenta, 12 = Rose, 13 = White, 14 = Custom 1, 15 = Custom 2	0	rw	y
	13	Color 2 Intensity	3	0 = High, 1 = Medium, 2 = Low, 3 = Off, 4 = Custom	0	rw	y
87		<b>State 4 Parameters</b>					
	1	Animation Type	4	0 = Off, 1 = Steady, 2 = Flash, 3 = Two Color Flash, 4 = 50/50, 5 = 50/50 Rotate, 6 = Chase, 7 = Intensity Sweep, 8 = Color Sweep, 9 = Sequence, 10 = Wave, 11 = Double Wave	1	rw	y
	2	Animation Direction	1	false = CW, true = CCW	False	rw	y
	3	Animation Pattern	3	0 = Flash, 1 = Strobe, 2 = Three Pulse, 3 = SOS, 4 = Random	0	rw	y
	4	Animation Speed	2	0 = Slow, 1 = Medium, 2 = Fast, 3 = Custom	1	rw	y
	5	Reserved	2	0	0	rw	y
	6	Off Delay Type	1	false = Leading Edge, true = Trailing Edge	False	rw	y
	7	Off Delay (ms)	16	0..65535	0	rw	y
	8	Static Sequence Value (0-255)	8	0..255	0	rw	y
	9	Sequence Start Location	3	0 = LED 1, 1 = LED 2, 2 = LED 3, 3 = LED 4, 4 = LED 5, 5 = LED 6, 6 = LED 7, 7 = LED 8	0	rw	y
	10	Color 1	5	0 = Green, 1 = Red, 2 = Orange, 3 = Amber, 4 = Yellow, 5 = Lime Green, 6 = Spring Green, 7 = Cyan, 8 = Sky Blue, 9 = Blue, 10 = Violet, 11 = Magenta, 12 = Rose, 13 = White, 14 = Custom 1, 15 = Custom 2	0	rw	y
	11	Color 1 Intensity	3	0 = High, 1 = Medium, 2 = Low, 3 = Off, 4 = Custom	0	rw	y
	12	Color 2	5	0 = Green, 1 = Red, 2 = Orange, 3 = Amber, 4 = Yellow, 5 = Lime Green, 6 = Spring Green, 7 = Cyan, 8 = Sky Blue, 9 = Blue, 10 = Violet, 11 = Magenta, 12 = Rose, 13 = White, 14 = Custom 1, 15 = Custom 2	0	rw	y
	13	Color 2 Intensity	3	0 = High, 1 = Medium, 2 = Low, 3 = Off, 4 = Custom	0	rw	y
88		<b>Custom Color 1</b>	24				
	1	Red	8	0..255	255	rw	y
	2	Green	8	0..255	255	rw	y
	3	Blue	8	0..255	255	rw	y
89		<b>Custom Color 2</b>	24				
	1	Red	8	0..255	255	rw	y
	2	Green	8	0..255	255	rw	y
	3	Blue	8	0..255	255	rw	y

## IO-Link Events

Events and Error Types are acyclic transmissions from the IO-Link device to the IO-Link master. Events can be error messages and/or warning or maintenance data.

Event Types		
Code	Type	Description
0 (0x0000)	Notification	No malfunction
20480 (0x5000)	Error	Device hardware fault/Device exchange

Error Types			
Code	Additional Code	Name	Description
128 (0x80)	0 (0x00)	Device application error - no details	Service has been refused by the device application and no detailed information of the incident is available
	17 (0x11)	Index not available	Access occurs to a not existing device
	18 (0x12)	Subindex not available	Access occurs to a not existing subindex
	32 (0x20)	Service temporarily not available	Parameter is not accessible because of the current state of the device application
	35 (0x23)	Access denied	Write access on a read-only parameter
	48 (0x30)	Parameter value out of range	Written parameter value is outside its permitted value range
	49 (0x31)	Parameter value above limit	Written parameter value is above its specific value limit
	51 (0x33)	Parameter length overrun	Written parameter length is above its predefined length
	52 (0x34)	Parameter length underrun	Written parameter length is below its predefined length
	53 (0x35)	Function not available	Written command is not supported by the device application
	54 (0x36)	Function temporarily unavailable	Written command is not available because of the current state of the device application
	65 (0x41)	Inconsistent parameter set	Parameter inconsistencies were found at the end of the block parameter transfer, device plausibility check failed

## Chapter Contents

FCC Part 15 Class B for Unintentional Radiators .....	24
Industry Canada ICES-003(B).....	24
Dimensions.....	25
Beam Pattern .....	25

## Chapter 4 Specifications

### Supply Voltage and Current

18 V DC to 30 V DC

- 220 mA at 10 V DC (exclusive of load)
- 190 mA at 12 V DC (exclusive of load)
- 115 mA at 24 V DC (exclusive of load)
- 100 mA at 30 V DC (exclusive of load)

### Supply Protection Circuitry

Protected against transient voltages and output short-circuit

### Leakage Current Immunity

400  $\mu$ A

### Vibration and Mechanical Shock

Meets IEC 60068-2-6 requirements (Vibration: 10 Hz to 55 Hz, 1.0 mm amplitude, 5 minutes sweep, 30 minutes dwell)

Meets IEC 60068-2-27 requirements (Shock: 30G 11 ms duration, half sine wave)

### Operating Conditions

-20 °C to +50 °C (-4 °F to +122 °F)

90% at +50 °C maximum relative humidity (non-condensing)

Storage Temperature: -40 °C to +70 °C (-40 °F to +158 °F)

### Environmental Rating

IP66, IP67, IP69K per ISO 20653

### Connections

Integral 4-pin M12 male quick-disconnect connector

### Mounting

M30 by 1.5 threaded base, maximum torque 4.5 N·m (40 inch-lbf)

Mounting nut included

### Construction

Base and Dome: Polycarbonate

Mounting Nut: Polybutylene terephthalate (PBT)

### Application Note

For the most accurate measurements, allow 5 minutes for the sensor to warm up

### Remote Input

Allowable Input Voltage Range: 0 to V<sub>supply</sub>

Active High (internal weak pull-down): High state > (V<sub>supply</sub> - 2.25 V) at 2 mA maximum

Active Low (internal weak pull-up): Low state < 2.25 V at 2 mA maximum

### Repeatability

5 mm from 20 to 300 mm

8 mm from 300 mm to 600 mm

14 mm from 600 mm to 1000 mm

### Temperature Effect

<±5 mm from -20 °C to +50 °C (-4 °F to +122 °F)

### Required Overcurrent Protection



**WARNING:** Electrical connections must be made by qualified personnel in accordance with local and national electrical codes and regulations.

Overcurrent protection is required to be provided by end product application per the supplied table.

Overcurrent protection may be provided with external fusing or via Current Limiting, Class 2 Power Supply.

Supply wiring leads < 24 AWG shall not be spliced.

For additional product support, go to [www.bannerengineering.com](http://www.bannerengineering.com).

Supply Wiring (AWG)	Required Overcurrent Protection (A)	Supply Wiring (AWG)	Required Overcurrent Protection (A)
20	5.0	26	1.0
22	3.0	28	0.8
24	1.0	30	0.5

### Certifications



Banner Engineering BV  
Park Lane, Culliganlaan 2F bus 3  
1831 Diegem, BELGIUM



### Range

The sensor can detect an object at the following ranges, depending on the material and size of the target: 20 mm to 1000 mm

### Sensing Beam

Infrared, 940 nm

## Default Indicator Characteristics

Color	Dominant Wavelength (nm) or Color Temperature (CCT)	Color Coordinates <sup>(2)</sup>		Lumen Output Per Segment (Typical at 25 °C)
		X	Y	
Green	522	0.154	0.7	19.5
Red	620	0.689	0.309	10.3
Yellow	576	0.477	0.493	25.8
Blue	466	0.14	0.054	3.6
White	5700K	0.328	0.337	30.5
Cyan	493	0.17	0.34	22.1
Magenta	-	0.379	0.172	12.7
Amber	589	0.556	0.42	17.9
Rose	-	0.525	0.237	10.6
Lime Green	562	0.383	0.523	25.3
Sky Blue	486	0.145	0.24	17.8
Orange	599	0.616	0.37	14.3
Violet	-	0.224	0.099	14.3
Spring Green	508	0.155	0.524	20

## FCC Part 15 Class B for Unintentional Radiators

(Part 15.105(b)) This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

(Part 15.21) Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

## Industry Canada ICES-003(B)

This device complies with CAN ICES-3 (B)/NMB-3(B). Operation is subject to the following two conditions: 1) This device may not cause harmful interference; and 2) This device must accept any interference received, including interference that may cause undesired operation.

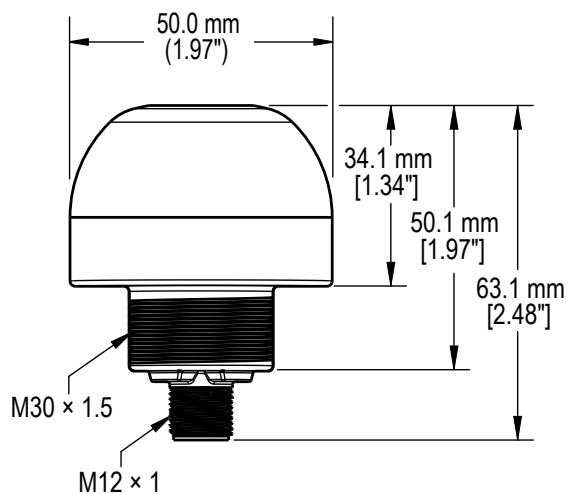
Cet appareil est conforme à la norme NMB-3(B). Le fonctionnement est soumis aux deux conditions suivantes : (1) ce dispositif ne peut pas occasionner d'interférences, et (2) il doit tolérer toute interférence, y compris celles susceptibles de provoquer un fonctionnement non souhaité du dispositif.

<sup>(2)</sup> Refer to CIE 1931 chromaticity diagram or color chart to show equivalent color with indicated color coordinates. Actual coordinates may differ by 10%.

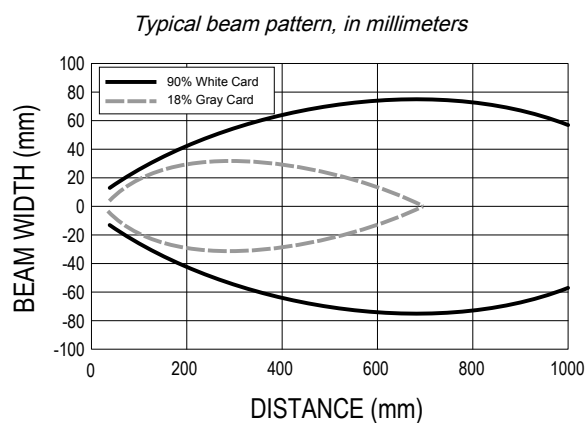


## Dimensions

All measurements are listed in millimeters [inches], unless noted otherwise. The measurements provided are subject to change.



## Beam Pattern



Chapter Contents

Cordsets

Brackets

Elevated Mount System

26

26

28

Chapter 5

Accessories

Cordsets

4-pin A-Code Double-Ended M12 Female to M12 Male Cordsets				
Model	Length	Dimensions (mm)	Pinouts	
BC-M12F4-M12M4-22-1	1 m (3.28 ft)		<div><div>Female</div><div>Male</div></div> <div><div>1 = Brown</div><div>2 = White</div><div>3 = Blue</div><div>4 = Black</div></div>	
BC-M12F4-M12M4-22-2	2 m (6.56 ft)			
BC-M12F4-M12M4-22-3	3 m (9.84 ft)			
BC-M12F4-M12M4-22-4	4 m (13.12 ft)			
BC-M12F4-M12M4-22-5	5 m (16.4 ft)			
BC-M12F4-M12M4-22-10	10 m (30.81 ft)			
BC-M12F4-M12M4-22-15	15 m (49.2 ft)			


Brackets

<div><div>SMB30A</div><div><ul style="list-style-type: none"><li>Right-angle bracket with curved slot for versatile orientation</li><li>Clearance for M6 (¼ in) hardware</li><li>Mounting hole for 30 mm sensor</li><li>12-gauge stainless steel</li></ul></div><div><div>Hole center spacing: A to B=40</div><div>Hole size: A=ø 6.3, B= 27.1 × 6.3, C=ø 30.5</div></div></div>	
<div><div>SMB30FVK</div><div><ul style="list-style-type: none"><li>V-clamp, flat bracket and fasteners for mounting to pipe or extensions</li><li>Clamp accommodates 28 mm dia. tubing or 1 in. square extrusions</li><li>30 mm hole for mounting sensors</li></ul></div><div><div>Hole size: A= ø 31</div></div></div>	
<div><div>SMB30RAVK</div><div><ul style="list-style-type: none"><li>V-clamp, right-angle bracket and fasteners for mounting sensors to pipe or extrusion</li><li>Clamp accommodates 28 mm dia. tubing or 1 in. square extrusions</li><li>30 mm hole for mounting sensors</li></ul></div><div><div>Hole size: A = ø 30.5</div></div></div>	

**SMBAMS30P**


- Flat SMBAMS series bracket
- 30 mm hole for mounting sensors
- Articulation slots for 90°+ rotation
- 12-gauge 300 series stainless steel

**Hole center spacing:** A=26.0, A to B=13.0  
**Hole size:** A=26.8 × 7.0, B=∅ 6.5, C=∅ 31.0

**SMBAMS30RA**


- Right-angle SMBAMS series bracket
- 30 mm hole for mounting sensors
- Articulation slots for 90°+ rotation
- 12-gauge (2.6 mm) cold-rolled steel

**Hole center spacing:** A=26.0, A to B=13.0  
**Hole size:** A=26.8 × 7.0, B=∅ 6.5, C=∅ 31.0

**SMB30MM**


- 12-gauge stainless steel bracket with curved mounting slots for versatile orientation
- Clearance for M6 (1/4 in) hardware
- Mounting hole for 30 mm sensor

**Hole center spacing:** A = 51, A to B = 25.4  
**Hole size:** A = 42.6 × 7, B = ∅ 6.4, C = ∅ 30.1

**SMB30SC**


- Swivel bracket with 30 mm mounting hole for sensor
- Black reinforced thermoplastic polyester
- Stainless steel mounting and swivel locking hardware included

**Hole center spacing:** A=∅ 50.8  
**Hole size:** A=∅ 7.0, B=∅ 30.0

**SMB30FA**


- Swivel bracket with tilt and pan movement for precise adjustment
- Mounting hole for 30 mm sensor
- 12-gauge 304 stainless steel
- Easy sensor mounting to extrude rail T-slot
- Metric- and inch-size bolt available

**Bolt thread:** SMB30FA, A= 3/8 - 16 × 2 in; SMB30FAM10, A= M10 - 1.5 × 50  
**Hole size:** B= ∅ 30.1

**LMBE12RA35**

- Direct mounting of stand-off pipe, with common bracket type
- Zinc-plated steel
- 1/2-14 NPSM nut
- Mounting distance from the wall to the center of the 1/2-14 NPSM nut is 35 mm


**Hole center spacing:** 20.0



**LMBE12RA45**



- Direct mounting of stand-off pipe, with common bracket type
- Zinc-plated steel
- 1/2-14 NPSM nut
- Mounting distance from the wall to the center of the 1/2-14 NPSM nut is 45 mm

**Hole center spacing: 35.0**



All measurements are listed in millimeters [inches], unless noted otherwise. The measurements provided are subject to change.

## Elevated Mount System

Model		Description	Components
<b>SA-M30E12P</b> - Black Acetal		<ul style="list-style-type: none"> <li>• Streamlined black acetal stand-off pipe adapter/cover</li> <li>• Connects between 30 mm light base and ½ in. NPSM/DN15 pipe</li> <li>• Mounting hardware included</li> </ul>	
<b>Black Anodized Aluminum</b>	<b>Clear Anodized Aluminum</b>	<ul style="list-style-type: none"> <li>• Elevated-use stand-off pipe (½ in. NPSM/DN15)</li> <li>• Polished 304 stainless steel, black anodized aluminum, or clear anodized aluminum surface</li> <li>• ½ in. NPT thread at both ends: one end screws into the internal threads of the light's base, and one end screws into the mounting base adapter/cover</li> <li>• Compatible with most industrial environments</li> </ul>	
<b>SOP-E12-150A</b>	<b>SOP-E12-150AC</b>		
150 mm (6 in) long	150 mm (6 in) long		
<b>SOP-E12-300A</b>	<b>SOP-E12-300AC</b>		
300 mm (12 in) long	300 mm (12 in) long		
<b>SOP-E12-600A</b>	<b>SOP-E12-600AC</b>		
600 mm (24 in) long	600 mm (24 in) long		
<b>SOP-E12-900A</b>	<b>SOP-E12-900AC</b>		
900 mm (36 in) long	900 mm (36 in) long		

Chapter Contents

Clean with Mild Detergent and Water.....	29
Repairs .....	29
Contact Us.....	29
Banner Engineering Corp Limited Warranty.....	29

# Chapter 6      Product Support and Maintenance

## Clean with Mild Detergent and Water

Wipe down the device with a soft cloth that has been dampened with a mild detergent and warm water solution.

## Repairs

Contact Banner Engineering for troubleshooting of this device. **Do not attempt any repairs to this Banner device; it contains no field-replaceable parts or components.** If the device, device part, or device component is determined to be defective by a Banner Applications Engineer, they will advise you of Banner's RMA (Return Merchandise Authorization) procedure.

**IMPORTANT:** If instructed to return the device, pack it with care. Damage that occurs in return shipping is not covered by warranty.

## Contact Us

Banner Engineering Corp. headquarters is located at: 9714 Tenth Avenue North | Plymouth, MN 55441, USA | Phone: + 1 888 373 6767

For worldwide locations and local representatives, visit [www.bannerengineering.com](http://www.bannerengineering.com).

## Banner Engineering Corp Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

**THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.**

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. **IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.**

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: [www.bannerengineering.com](http://www.bannerengineering.com).

For patent information, see [www.bannerengineering.com/patents](http://www.bannerengineering.com/patents).

