


LP400WB *Wide-beam Divergent Mode Remote Sensor*




The LP400WB is a wide-beam divergent proximity-mode remote sensor which is very useful for sensing small or irregularly shaped or transparent/translucent objects. Its small size makes it especially convenient for use where space is limited, such as on small assembly machines, and its wide beam angle prevents possible erratic operation due to variations in the color or shape of the object being sensed. The optics are such that even small threads or wires of .005" (0.1mm) or greater in diameter can be detected when they pass within .25" (6mm) of the sensor end. Range is from zero to 1" for clear materials. The threaded barrel design is compatible with many versatile mounting methods.




This sensor is designed for use with Banner MICRO-AMP® system MA3-4 and MA3-4P amplifiers, MAXI-AMP™ system CM Series amplifiers, and MB Series amplifiers.


The LP400WB sensor should not be used for precise position control, nor should it be mounted with its lens recessed into a mounting hole.



EXCESS GAIN CURVE



BEAM PATTERN



Specifications, LP400WB

RANGE: to 3 inches, referenced to a 90% reflectance white test card

RESPONSE SPEED: a function of the amplifier (see below)

OPERATING TEMPERATURE: -40 to +80° C (-40 to +176° F)

EMITTER CHARACTERISTICS: infrared LED, 940nm

CONSTRUCTION: totally encapsulated, blue anodized aluminum housing with two plated steel jam nuts (supplied). NEMA 1, 3, 4, 12, and 13.

CABLE: sensors are supplied with 6' of PVC-covered cable. 30' cables are available by special order.

Wiring rules

- 1) Avoid running remote sensor cables in wireways together with power-carrying conductors.
- 2) Avoid running remote sensor cables through areas of known extreme electrical interference (electrical "noise").
- 3) Always use shielded cables and only connect the shield ("drain") wire at the amplifier.
- 4) When splicing, never combine emitter and receiver wires into a common cable. (The result will be electrical "crosstalk" within the cable, which causes a "lock-on" condition of the amplifier.)

Hookup to MB Series Amplifiers

Banner remote sensors will connect to any MB Series amplifier. The model MRB chassis (shown) has octal sockets for the amplifier and a BR-2 relay (supplied) and provides power for the sensors and amplifier. Up to four sensors may be connected to one amplifier for light-operated OR or dark operated AND operation. See the multiple sensor CM module hookup on the next page for lead connection information: the black and red leads are connected in parallel, while the green and white leads are connected in series.

Several MB Series amplifiers are available. Each provides a different output logic function. Chassis models with additional octal sockets are also available. Other types of output devices, including solid state relays, may be ordered (see Banner catalog).

Specifications, MB Series Amplifiers


POWER SUPPLY REQUIREMENT: 12-18V dc at less than 100mA, exclusive of load.

OUTPUT CONFIGURATION: open collector NPN transistor; maximum on-state current 250mA, maximum off-state leakage current 100 microamps.

RESPONSE SPEED: 1 millisecond ON and OFF.

MAXIMUM SENSOR LEAD LENGTH: 100 feet (30m) maximum; use separate shielded cables for emitter and receiver when splicing added cable.

OPERATING TEMPERATURE RANGE: 0 to +50°C (+32 to +122° F).

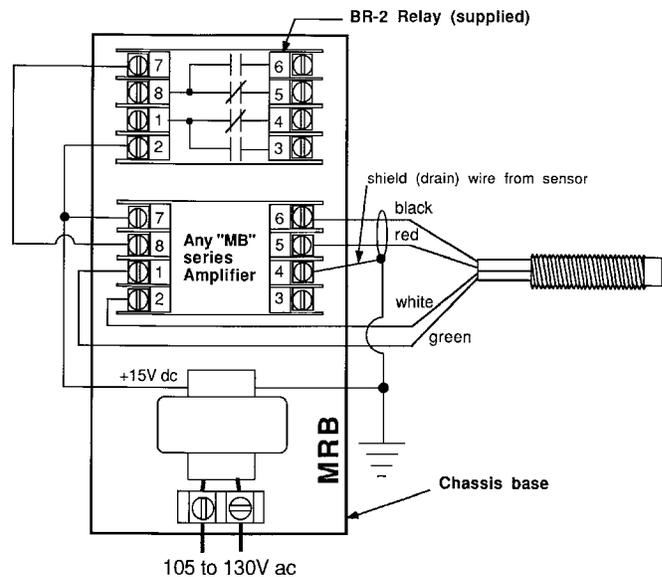

Hookup to MAXI-AMP™ CM Series Modules

CM Series modules combine power supply, modulated photoelectric amplifier, timing logic (CM5 models), and output relay in a single compact module. Only an 11-pin relay socket (Banner model RS-11) is needed to complete the system.


The CM Series contains models with or without programmable timing logic and with either electromechanical or solid-state relay outputs. See the Banner product catalog for further information.

Up to three sensors may be connected to each amplifier. Light-operated OR logic (input to module occurs whenever at least one sensor sees

"light") or dark-operated AND logic (input to module occurs when all sensors simultaneously see "dark") is possible.


NOTE: to power the MAXI-AMP from a DC power supply, connect +12 to 28V dc at $\geq 70\text{mA}$ to terminal #3 and DC common to terminal #1. Make no connections to terminal #7 or #8.

To a Single Sensor

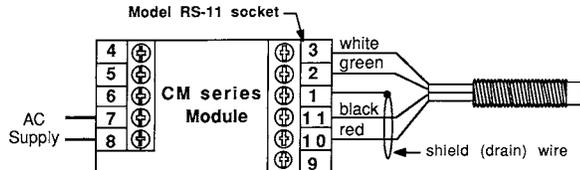

To Multiple Sensors

When wiring two sensors to one MAXI-AMP, multiply excess gain data (from excess gain curve) for each sensor by 1/2; when wiring three sensors to one MAXI-AMP, multiply excess gain by 1/3.

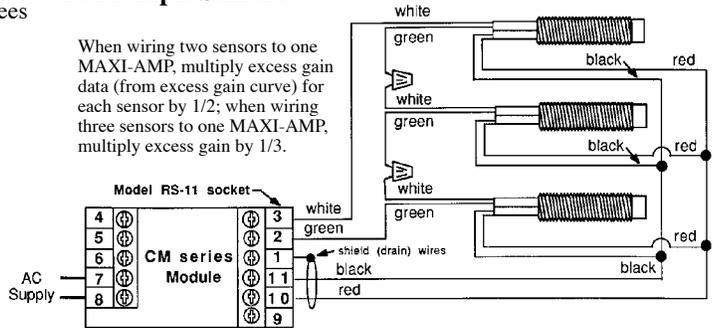

Specifications, MAXI-AMP CM Series Modules

RESPONSE SPEED: programmable for 10, 2, or 0.3 milliseconds (10 millisecond setting enhances noise rejection).

MAXIMUM SENSOR LEAD LENGTH: 50' (15m) maximum.

To avoid "cable crosstalk", use *separate* shielded cable for emitter and receiver, or order sensors with extended cable length.

OPERATING TEMPERATURE RANGE: 0 to +50 degrees C (+32 to +122 degrees F).


Hookup to MICRO-AMP® Modules

MICRO-AMP amplifier module models MA3-4 and MA3-4P may be used with the LP400WB. Model MA3-4 has complementary *current sinking* outputs. Model MA3-4P has complementary *current sourcing* outputs.

Model MA3-4 (but *not* model MA3-4P) may be powered by the model MPS-15 power supply, as shown in the hookup diagram (right). The MPS-15 includes a socket for the MA3-4 and has a built-in SPDT output relay (switchable by the MA3-4 module).

MICRO-AMP modules may also be mounted in a model RS8 wiring socket and powered from a "remote" power supply. PVC mounting track is available in 6" and 12" lengths to accommodate multiple MICRO-AMP system components.

NOTE: only one LP400WB may be connected to each amplifier.

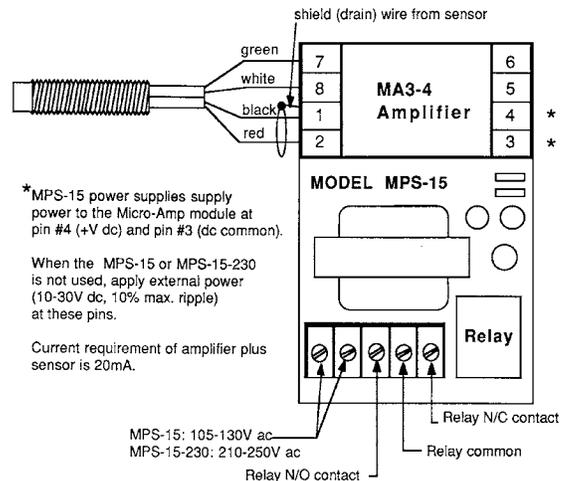

Specifications, MICRO-AMP MA3-4 & MA3-4P

POWER SUPPLY REQUIREMENT: 10-30V dc at less than 20mA; 10% maximum ripple (obtainable from MPS-15 power supply--see above).

OUTPUT CONFIGURATION: model MA3-4 has two open-collector NPN (current sinking) transistor solid state switches, one normally open, one normally closed. 150mA max. each output. Model MA3-4P has two PNP (sourcing) outputs, 150mA max. each.

RESPONSE SPEED: 1 millisecond ON and OFF.

MAXIMUM SENSOR LEAD LENGTH: 30' (9m).

OPERATING TEMPERATURE RANGE: -40 to +70 degrees C (-40 to +158 degrees F).



WARNING These photoelectric presence sensors and amplifiers do NOT include the self-checking redundant circuitry necessary to allow their use in personnel safety applications. A sensor or amplifier failure or malfunction can result in *either* an energized or a de-energized sensor output condition.

Never use these products as sensing devices for personnel protection. Their use as safety devices may create an unsafe condition which could lead to serious injury or death.

Only MACHINE-GUARD and PERIMETER-GUARD Systems, and other systems so designated, are designed to meet OSHA and ANSI machine safety standards for point-of-operation guarding devices. No other Banner sensors or controls are designed to meet these standards, and they must NOT be used as sensing devices for personnel protection.