

VELC... Sealed Lens Cover



Datasheet

Waterproof lens cover for use with VE vision sensors




- Rugged, waterproof housing, rated IP67
- Available with painted aluminum housing and a choice of either polycarbonate or borosilicate glass windows
- Mounts directly to VE vision sensors

Lens cover shown mounted to sensor.
Sensor sold separately.

Models

Model	Length	Material	Window Material
VELC60-PC ¹	60 mm	Painted aluminum	Polycarbonate
VELC60-BG ¹			Borosilicate glass
VELC85-PC ²	85 mm		Polycarbonate
VELC85-BG ²			Borosilicate glass

Installing the Lens Cover

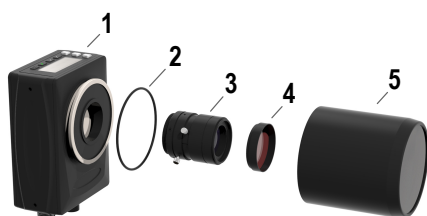

1. Remove the black thread protector (not shown) from the sensor (1).
2. Fit a single o-ring (2) into the undercut area behind the sensor threads.
3. Remove the temporary imager cover (not shown).
4. Install and focus the C-mount lens (3).
5. Thread the filter (4), if using, onto the front of the lens.
Filters are recommended to improve image quality.
6. Thread the lens cover (5) onto the threaded portion of the sensor.

¹ For 5 MP camera and lens, only compatible with 25 mm and 35 mm focal lengths without a filter installed.

² For 5 MP camera and lens, compatible with 12 mm to 75 mm focal lengths without filter installed. With filter installed the sealed lens cover is only compatible with 25 mm to 35 mm focal lengths.



Maintenance

Regularly remove dust, dirt, or fingerprints from the lens cover. Use anti-static compressed air to blow off dust. If necessary, use a lens cloth and lens cleaner or window cleaner to wipe off remaining debris.

Specifications

Construction

Housing: Painted black aluminum
 Window: Polycarbonate or borosilicate glass, depending on model

Outside Dimensions

VELC60-...: 57.3 mm diameter by 60 mm long overall (2.26 in diameter by 2.36 in long)
 VELC85-...: 57.3 mm diameter by 85 mm long overall (2.26 in diameter by 3.35 in long)

Environmental Rating

IEC IP67 when installed on VE smart camera

Banner Engineering Corp. Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to:

www.bannerengineering.com.