

K50 Pro Select Touch Product Manual



Original Instructions

p/n: 240396 Rev. A

10-Jan-25

© Banner Engineering Corp. All rights reserved.

Contents


Chapter 1 Features	3
Models	3
Chapter 2 Wiring	4
Chapter 3 Pro Editor	5
Full Preview Connection (Required)	5
K50 Pro Select Touch Button Pro Editor Program Options	5
Touch Devices	5
Device Logic Mode – Four State Full Logic	6
Device Logic Mode – Three State Advanced Control	6
Global Parameters and Advanced Settings	7
Chapter 4 Specifications	9
FCC Part 15 Class B for Unintentional Radiators.....	10
Industry Canada ICES-003(B).....	10
Dimensions	11
Chapter 5 Accessories	12
Pro Editor Hardware	12
Cordsets	12
Brackets	13
Wash-Down Cover.....	15
Elevated Mount System.....	15
Chapter 6 Product Support and Maintenance	16
Clean with Mild Detergent and Water	16
Repairs	16
Contact Us.....	16
Banner Engineering Corp Limited Warranty	16

Chapter Contents

Models 3

Chapter 1

Features



- Bright, uniform touch button
- Three default colors in one device (Green, Red, Yellow)
- Programmable using Banner's Pro Editor software and Pro Converter Cable
- Translucent polycarbonate dome
- Rugged IP66, IP67, IP69K per ISO 20653 and UL Type 4X and UL Type 13 design
- Bimodal inputs and output (PNP/NPN), depending on source wiring
- Excellent immunity to false triggering by water spray, detergents, oils, and other foreign materials
- Devices are completely self-contained—no controller needed
- Ergonomically designed to eliminate hand, wrist, and arm stresses associated with repeated switch operation; no physical force required to operate
- Can be actuated with bare hands or gloves; sensitivity can be adjusted using Pro Editor software

Models


Model Name	Style	Color and Input	Connector ⁽¹⁾
K50	PST	GRY3	Q
	PST = Pro Select Touch	GRY3 = RGB Multicolor (3 colors)	Q = Integral 5-pin M12 male quick-disconnect connector

⁽¹⁾ Models with a quick-disconnect connector require a mating cordset.

Chapter Contents

Chapter 2 Wiring

GRY3 Wiring Diagrams

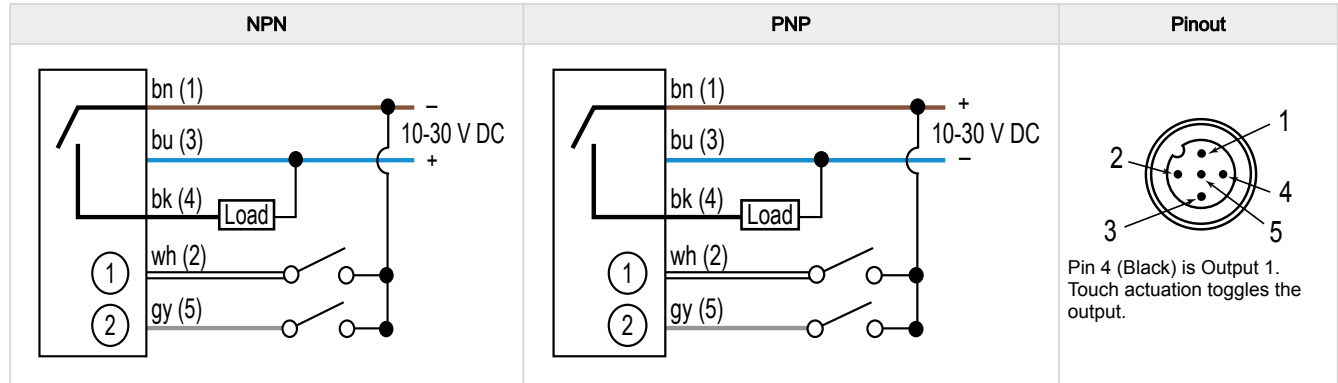


GRY3 Multicolor Color/Function Definition

	Green	Yellow	Red
Input 1	X	X	
Input 2		X	X

Chapter Contents

Full Preview Connection (Required)..... 5
 K50 Pro Select Touch Button Pro Editor Program Options 5


Chapter 3 Pro Editor



Use Banner's Pro Editor software and Pro Converter Cable to create custom configurations by selecting different colors, flash patterns, and animations. For more information visit www.bannerengineering.com/proeditor.

Full Preview Connection (Required)

The full preview connection must be used for the K50 Pro Select Touch Button.

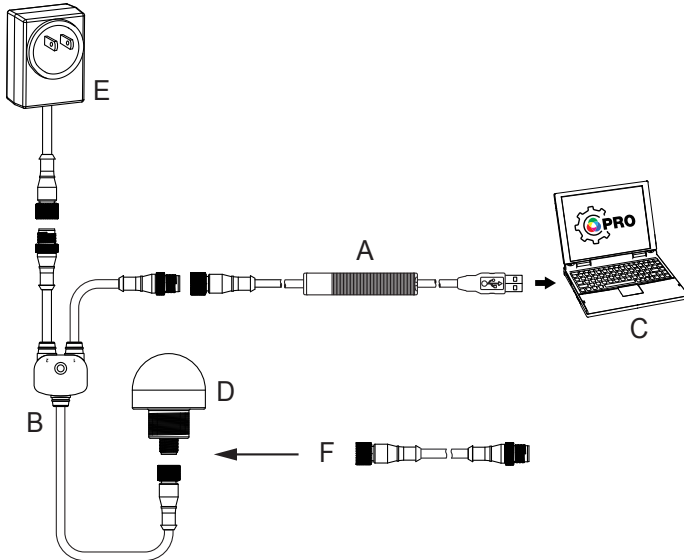

- A = Pro Converter Cable (MQDC-506-USB)
- B = Splitter (CSB-M1251FM1251M)
- C = PC running Pro Editor software
- D = Any Banner Pro Series-enabled device (K50 shown)
- E = Power Supply (PSW-24-1, PSW-24-2, or PSD-24-4)
- F = 8-Pin to 5-Pin Double-Ended Cordset (MQDC-801-5M-PRO), required for 8-Pin models

K50 Pro Select Touch Button Pro Editor Program Options

Touch Devices

Touch devices have the following animations available to them:

Animations	Description
Off	Device or segment is off
Steady	Color 1 is on at the defined intensity
Flash	Color 1 flashes at the defined speed, color intensity, and pattern (normal, strobe, three pulses, SOS, or random)
Two Color Flash	Color 1 and Color 2 flash alternately at the defined speed, color intensities, and pattern (normal, strobe, three pulses, SOS, or random)
50/50	Color 1 displays on 50% and Color 2 displays on the other 50% statically at the defined color intensities

Continued on page 6

Continued from page 5

Animations	Description
50/50 Rotate	Color 1 displays on 50% and Color 2 displays on the other 50% while rotating at the defined speed, color intensities, rotational direction
Chase	Color 1 is displayed as a single spot against the background of Color 2 while rotating at the defined speed, color intensities, rotational direction
Intensity Sweep	Color 1 continuously increases and decreases intensity between 0% to 100% on each device or on every segment at the defined speed and color intensity
Demo	Demo sequence cycles through several sets of colors and configurations to highlight example applications

When a touch device is connected, **Device Logic Mode** configuration displays.

By default, when a touch device is connected, Pro Editor opens **Device Logic Mode** configuration populated with the configuration written to the device. If no device logic mode is selected, use the **Device Logic Mode** drop-down to select a logic mode, then write the configuration to the device. Two **Device Logic Modes** are available:

- Four State Full Logic
- Three State Advanced Control

Device Logic Mode – Four State Full Logic

When using Four State Full Logic, four device states are activated by one input wire and the touch button. The touch button also toggles the output(s).

Assuming power is on using the blue and brown wires:


- State 1:** Input Inactive, Touch Inactive
- State 2:** Input Active, Touch Inactive
- State 3:** Input Inactive, Touch Active
- State 4:** Input Active, Touch Active

Four State Full Logic	Not Actuated	Actuated
No Input	State 1	State 3
Input 1	State 2	State 4

Preview	Device State	Animation	Color 1	Intensity 1	Color 2	Intensity 2	Speed	Pattern	Direction
Start	State 1	Steady	Green	Hi					
Start	State 2 (WH)	Steady	Yellow	Hi					
Start	State 3 (Touch)	Steady	Red	Hi					
Start	State 4 (WH & Touch)	Steady	Blue	Hi					

Device Logic Mode – Three State Advanced Control


When using Three State Advanced Control, four device states are activated by two input wires. The touch button toggles the output(s) with no device state change.

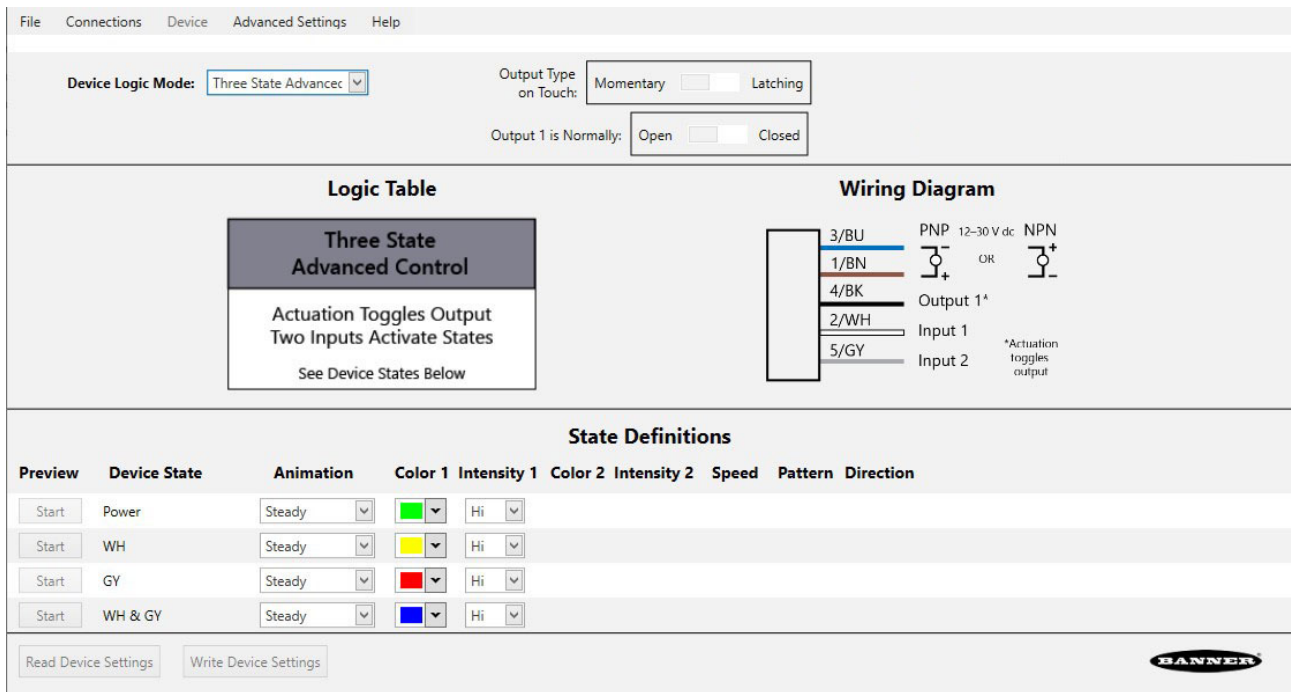

Global Parameters and Advanced Settings

When connected to the K50 Pro Select Touch device, the following global parameters appear in the configuration display.

K50 Pro Select Touch Global Parameters – Pro Editor

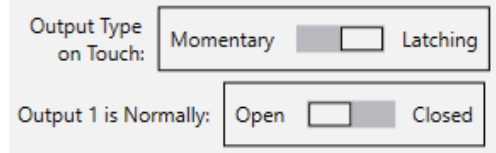


K50 Pro Select Touch Parameter	Description
Output Type on Touch	In Momentary mode, the output only toggles while the touch button is touched. In Latching mode, the output toggles each time the touch button is pressed. ⁽²⁾
Output 1 is Normally	In Open mode, output 1 is turned ON with touch input. In Closed mode, output 1 is turned OFF with touch input.

When an actuator device is connected, the following **Advanced Settings** can be accessed by clicking on the **AdvancedSettings** menu.

⁽²⁾ When **Output Type on Touch** is set to Latching mode, output state and device state transitions both occur on the leading edge of touch input.

K50 Pro Select Touch Advanced Settings – Pro Editor

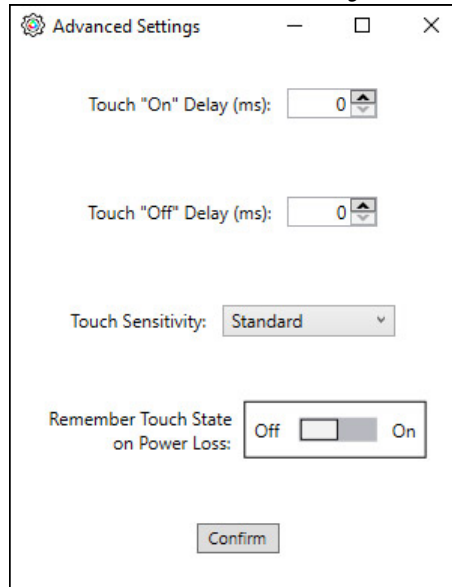

K50 Pro Select Touch Setting	Description
Touch "On" Delay (ms)	The length of time the touch button needs to be pressed to trigger "touch active" state.
Touch "Off" Delay (ms)	The length of time before the device returns to "touch inactive" state after the touch button is released.
Touch Sensitivity	The touch button is easily toggled in High mode, and resists unintentional toggling in Low mode.
Remember Touch State on Power Loss	When the Global Parameter Output Type on Touch is set to Latching the Remember Touch State on Power Loss setting, determines whether touch state should be reset or retained when power is restored. When ON the touch state will be retained when power to the device is lost. When OFF the touch state will be reset when power to the device is lost.

Chapter Contents

FCC Part 15 Class B for Unintentional Radiators 10
 Industry Canada ICES-003(B)..... 10
 Dimensions..... 11

Chapter 4 Specifications

Supply Voltage and Current

10 V DC to 30 V DC

- 220 mA at 10 V DC (exclusive of load)
- 190 mA at 12 V DC (exclusive of load)
- 115 mA at 24 V DC (exclusive of load)
- 100 mA at 30 V DC (exclusive of load)

Supply Protection Circuitry

Protected against transient voltages and output short-circuit

Leakage Current Immunity

400 µA

Touch Dwell Time

If touch dwells for longer than 60 seconds, the output will revert to the untouched state

Vibration and Mechanical Shock

Meets IEC 60068-2-6 requirements (Vibration: 10 Hz to 55 Hz, 1.0 mm amplitude, 5 minutes sweep, 30 minutes dwell)
 Meets IEC 60068-2-27 requirements (Shock: 30G 11 ms duration, half sine wave)

Operating Conditions

−40 °C to +50 °C (−40 °F to +122 °F)
 90% at +50 °C maximum relative humidity (non-condensing)
 Storage Temperature: −40 °C to +70 °C (−40 °F to +158 °F)

Environmental Rating

IP66, IP67, IP69K per ISO 20653

Connections

Integral 5-pin M12 male quick-disconnect connector

Mounting

M30 by 1.5 threaded base, maximum torque 4.5 N·m (40 inch-lbf)
 Mounting nut included

Construction

Base and Dome: Polycarbonate
 Mounting Nut: Polybutylene terephthalate (PBT)

Required Overcurrent Protection



WARNING: Electrical connections must be made by qualified personnel in accordance with local and national electrical codes and regulations.

Overcurrent protection is required to be provided by end product application per the supplied table.

Overcurrent protection may be provided with external fusing or via Current Limiting, Class 2 Power Supply.

Supply wiring leads < 24 AWG shall not be spliced.

For additional product support, go to www.bannerengineering.com.

Supply Wiring (AWG)	Required Overcurrent Protection (A)	Supply Wiring (AWG)	Required Overcurrent Protection (A)
20	5.0	26	1.0
22	3.0	28	0.8
24	1.0	30	0.5

Certifications



Banner Engineering BV
 Park Lane, Culliganlaan 2F bus 3
 1831 Diegem, BELGIUM



Output Ratings

Maximum Load: 150 mA

ON-State Saturation Voltage:

- < 2 V DC at 10 mA
- < 2.5 V DC at 150 mA

OFF-State Leakage Current: < 10 µA at 30 V DC

Output Response Time

- Power-Up Delay: 500 milliseconds maximum
- Input Response: 40 milliseconds maximum
- Output Response: 300 milliseconds maximum

Default Indicator Characteristics

Color	Dominant Wavelength (nm) or Color Temperature (CCT)	Color Coordinates ⁽³⁾		Lumen Output Per Segment (Typical at 25 °C)
		X	Y	
Green	522	0.154	0.7	19.5
Red	620	0.689	0.309	10.3
Yellow	576	0.477	0.493	25.8
Blue	466	0.14	0.054	3.7
White	5700K	0.328	0.337	30.5
Cyan	493	0.17	0.34	22.1
Magenta	-	0.379	0.172	12.7
Amber	589	0.556	0.42	17.9
Rose	-	0.515	0.22	10.6
Lime Green	562	0.388	0.561	25.3
Sky Blue	486	0.155	0.247	17.8
Orange	599	0.616	0.37	14.3
Violet	-	0.217	0.089	7.1
Spring Green	508	0.177	0.536	20

FCC Part 15 Class B for Unintentional Radiators

(Part 15.105(b)) This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

(Part 15.21) Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

Industry Canada ICES-003(B)


This device complies with CAN ICES-3 (B)/NMB-3(B). Operation is subject to the following two conditions: 1) This device may not cause harmful interference; and 2) This device must accept any interference received, including interference that may cause undesired operation.

Cet appareil est conforme à la norme NMB-3(B). Le fonctionnement est soumis aux deux conditions suivantes : (1) ce dispositif ne peut pas occasionner d'interférences, et (2) il doit tolérer toute interférence, y compris celles susceptibles de provoquer un fonctionnement non souhaité du dispositif.

⁽³⁾ Refer to CIE 1931 chromaticity diagram or color chart to show equivalent color with indicated color coordinates. Actual coordinates may differ by 10%.

Dimensions

All measurements are listed in millimeters [inches], unless noted otherwise. The measurements provided are subject to change.




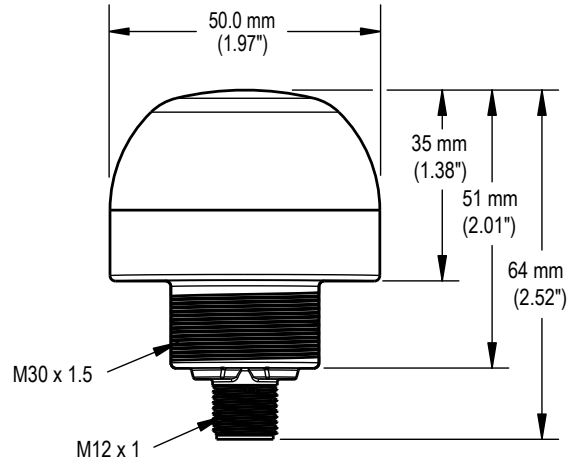


Chapter Contents

Pro Editor Hardware..... 12
 Cordsets 12
 Brackets 13
 Wash-Down Cover 15
 Elevated Mount System 15

Chapter 5 Accessories

Pro Editor Hardware

<p>MQDC-506-USB</p> <ul style="list-style-type: none"> • Pro Converter Cable • 1.83 m (6 ft) length 5-pin M12 quick disconnect to Device and USB to PC • Required for connection to the configuration software 	
<p>CSB-M1251FM1251M</p> <ul style="list-style-type: none"> • 5-pin parallel Y splitter (Male-Male-Female) • For full Pro Editor preview capability • Requires external power supply, sold separately 	
<p>PSW-24-1</p> <ul style="list-style-type: none"> • 24 V DC, 1 A power supply • 2 m (6.5 ft) PVC cable with M12 quick disconnect • Provides external power with splitter cable, sold separately 	
<p>PSW-24-2</p> <ul style="list-style-type: none"> • 24 V DC, 2 A power supply • 3.5 m (11.5 ft) PVC cable with M12 quick disconnect • Provides external power with splitter cable, sold separately 	

Cordsets

All measurements are listed in millimeters [inches], unless noted otherwise. The measurements provided are subject to change.


5-Pin Single-Ended M12 Female Cordsets				
Model	Length	Style	Dimensions	Pinout (Female)
MQDC1-501.5	0.5 m (1.5 ft)	Straight		<p>1 = Brown 2 = White 3 = Blue 4 = Black 5 = Gray</p>
MQDC1-503	0.9 m (2.9 ft)			
MQDC1-506	2 m (6.5 ft)			
MQDC1-515	5 m (16.4 ft)			
MQDC1-530	9 m (29.5 ft)			
MQDC1-560	18 m (59 ft)			
MQDC1-5100	31 m (101.7 ft)			
MQDC1-506RA	2 m (6.5 ft)	Right-Angle		<p>1 = Brown 2 = White 3 = Blue 4 = Black 5 = Gray</p>
MQDC1-515RA	5 m (16.4 ft)			
MQDC1-530RA	9 m (29.5 ft)			
MQDC1-560RA	19 m (62.3 ft)			

Brackets

SMB30A

- Right-angle bracket with curved slot for versatile orientation
- Clearance for M6 (1/4 in) hardware
- Mounting hole for 30 mm sensor
- 12-gauge stainless steel


Hole center spacing: A to B=40
Hole size: A=ø 6.3, B= 27.1 × 6.3, C=ø 30.5



SMB30FVK

- V-clamp, flat bracket and fasteners for mounting to pipe or extensions
- Clamp accommodates 28 mm dia. tubing or 1 in. square extrusions
- 30 mm hole for mounting sensors


Hole size: A= ø 31



SMB30RAVK

- V-clamp, right-angle bracket and fasteners for mounting sensors to pipe or extrusion
- Clamp accommodates 28 mm dia. tubing or 1 in. square extrusions
- 30 mm hole for mounting sensors


Hole size: A = ø 30.5



SMBAMS30P

- Flat SMBAMS series bracket
- 30 mm hole for mounting sensors
- Articulation slots for 90°+ rotation
- 12-gauge 300 series stainless steel


Hole center spacing: A=26.0, A to B=13.0
Hole size: A=26.8 × 7.0, B=∅ 6.5, C=∅ 31.0



SMBAMS30RA

- Right-angle SMBAMS series bracket
- 30 mm hole for mounting sensors
- Articulation slots for 90°+ rotation
- 12-gauge (2.6 mm) cold-rolled steel


Hole center spacing: A=26.0, A to B=13.0
Hole size: A=26.8 × 7.0, B=∅ 6.5, C=∅ 31.0



SMB30MM

- 12-gauge stainless steel bracket with curved mounting slots for versatile orientation
- Clearance for M6 (1/4 in) hardware
- Mounting hole for 30 mm sensor


Hole center spacing: A = 51, A to B = 25.4
Hole size: A = 42.6 × 7, B = ∅ 6.4, C = ∅ 30.1



SMB30SC

- Swivel bracket with 30 mm mounting hole for sensor
- Black reinforced thermoplastic polyester
- Stainless steel mounting and swivel locking hardware included


Hole center spacing: A=∅ 50.8
Hole size: A=∅ 7.0, B=∅ 30.0



SMB30FA

- Swivel bracket with tilt and pan movement for precise adjustment
- Mounting hole for 30 mm sensor
- 12-gauge 304 stainless steel
- Easy sensor mounting to extrude rail T-slot
- Metric- and inch-size bolt available


Bolt thread: SMB30FA, A= 3/8 - 16 × 2 in; SMB30FAM10, A= M10 - 1.5 × 50
Hole size: B= ∅ 30.1



LMBE12RA35

- Direct mounting of stand-off pipe, with common bracket type
- Zinc-plated steel
- 1/2-14 NPSM nut
- Mounting distance from the wall to the center of the 1/2-14 NPSM nut is 35 mm

Hole center spacing: 20.0



<p>LMBE12RA45</p> <ul style="list-style-type: none"> • Direct mounting of stand-off pipe, with common bracket type • Zinc-plated steel • 1/2-14 NPSM nut • Mounting distance from the wall to the center of the 1/2-14 NPSM nut is 45 mm <p>Hole center spacing: 35.0</p>	
---	--

All measurements are listed in millimeters [inches], unless noted otherwise. The measurements provided are subject to change.

Wash-Down Cover

<p>WC-K50T Washdown Cover</p> <ul style="list-style-type: none"> • FDA-grade silicone • Fits K50 touch buttons • IP67 and IP69K rated 	
---	--

Elevated Mount System

Model		Description	Components
SA-M30E12P - Black Acetal		<ul style="list-style-type: none"> • Streamlined black acetal stand-off pipe adapter/cover • Connects between 30 mm light base and 1/2 in. NPSM/ DN15 pipe • Mounting hardware included 	
Black Anodized Aluminum	Clear Anodized Aluminum	<ul style="list-style-type: none"> • Elevated-use stand-off pipe (1/2 in. NPSM/DN15) • Polished 304 stainless steel, black anodized aluminum, or clear anodized aluminum surface • 1/2 in. NPT thread at both ends: one end screws into the internal threads of the light's base, and one end screws into the mounting base adapter/cover • Compatible with most industrial environments 	
SOP-E12-150A 150 mm (6 in) long	SOP-E12-150AC 150 mm (6 in) long		
SOP-E12-300A 300 mm (12 in) long	SOP-E12-300AC 300 mm (12 in) long		
SOP-E12-600A 600 mm (24 in) long	SOP-E12-600AC 600 mm (24 in) long		
SOP-E12-900A 900 mm (36 in) long	SOP-E12-900AC 900 mm (36 in) long		

Chapter Contents

Clean with Mild Detergent and Water.....	16
Repairs	16
Contact Us.....	16
Banner Engineering Corp Limited Warranty.....	16

Chapter 6 Product Support and Maintenance

Clean with Mild Detergent and Water

Wipe down the enclosure and the display with a soft cloth that has been dampened with a mild detergent and warm water solution.

Repairs

Contact Banner Engineering for troubleshooting of this device. **Do not attempt any repairs to this Banner device; it contains no field-replaceable parts or components.** If the device, device part, or device component is determined to be defective by a Banner Applications Engineer, they will advise you of Banner's RMA (Return Merchandise Authorization) procedure.

IMPORTANT: If instructed to return the device, pack it with care. Damage that occurs in return shipping is not covered by warranty.

Contact Us

Banner Engineering Corp. headquarters is located at: 9714 Tenth Avenue North | Plymouth, MN 55441, USA | Phone: + 1 888 373 6767

For worldwide locations and local representatives, visit www.bannerengineering.com.

Banner Engineering Corp Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. **IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.**

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: www.bannerengineering.com.

For patent information, see www.bannerengineering.com/patents.

 [LinkedIn](#)

 [X \(formerly Twitter\)](#)

 [Facebook](#)

