



# Q2F Fixed-Field Miniature Low Profile Sensor Product Manual

Original Instructions

p/n: 251209 Rev. A

25-Feb-26

© Banner Engineering Corp. All rights reserved. [www.bannerengineering.com](http://www.bannerengineering.com)

# Contents

<b>Chapter 1 Product Description .....</b>	<b>3</b>
1.1 Models .....	4
1.2 Features and Indicators .....	4
<b>Chapter 2 Specifications .....</b>	<b>5</b>
2.1 Dimensions .....	6
2.2 Performance Curves .....	8
<b>Chapter 3 Installation Instructions .....</b>	<b>9</b>
3.1 Mount the Device .....	9
3.2 Wiring Diagrams .....	9
<b>Chapter 4 Accessories .....</b>	<b>10</b>
4.1 Cordsets .....	10
<b>Chapter 5 Product Support and Maintenance .....</b>	<b>11</b>
5.1 Clean with Mild Detergent and Warm Water .....	11
5.2 Repairs .....	11
5.3 Contact Us .....	11
5.4 Banner Engineering Corp Limited Warranty .....	11

Chapter Contents

1.1 Models ..... 4  
 1.2 Features and Indicators ..... 4

# Chapter 1 Product Description



- Flat, low-profile housing enables sensing in space-constrained applications and embedded installs where traditional housings will not fit
- Fixed-field sensing with sharp cutoff distances (10 mm, 15 mm, 30 mm, and 45 mm) provides stable detection in tight zones near rails, brackets, and fixture surfaces, with reliable, consistent performance across varying colors and surface finishes, including dark and low-reflectivity targets
- Reliably detects targets down to 0.1 mm for presence/absence verification of tiny features and small components close to backgrounds
- M2/M3 mounting options and M8, M12, or flying-lead connections simplify installation and integration while supporting consistent mounting and faster replacement
- Cost-efficient design reduces barriers to standardizing sensors across machines and in fixtures

**WARNING:**



- **Do not use this device for personnel protection**
- Using this device for personnel protection could result in serious injury or death.
- This device does not include the self-checking redundant circuitry necessary to allow its use in personnel safety applications. A device failure or malfunction can cause either an energized (on) or de-energized (off) output condition.

**WARNING:**




- **N'utilisez pas ce dispositif pour la protection du personnel.**
- L'utilisation de ce dispositif pour la protection du personnel pourrait entraîner des blessures graves ou mortelles.
- Ce dispositif n'est pas équipé du circuit redondant d'autodiagnostic nécessaire pour être utilisé dans des applications de protection du personnel. Une panne ou un dysfonctionnement du dispositif peut entraîner l'activation ou la désactivation de la sortie.

**WARNING:**




- **Verwenden Sie dieses Gerät nicht zum Schutz des Personals**
- Die Verwendung dieses Geräts zum Schutz des Personals kann zu schweren Verletzungen oder zum Tod führen.
- Dieses Gerät verfügt nicht über die selbstüberwachenden redundanten Schaltungen, die für Personenschutz-Anwendungen erforderlich sind. Ein Geräteausfall oder Defekt kann zu unvorhersehbarem Schaltverhalten des Ausgangs führen.

## 1.1 Models

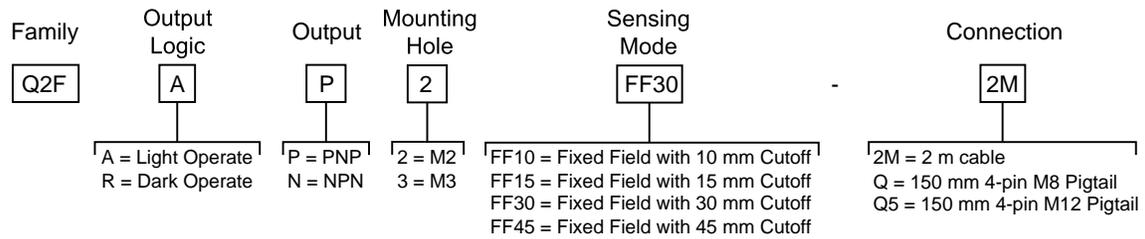

## 1.2 Features and Indicators

The Q2F Fixed Field sensor ignores objects beyond the set cutoff distance. This sensor can be used in most situations with varying object color and position or with varying background conditions.

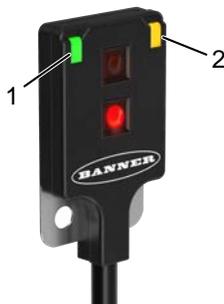

1. Green Power Indicator
2. Yellow Status Indicator
  - On = Light sensed
  - Flashing = marginal operating condition

Chapter Contents

2.1 Dimensions..... 6  
 2.2 Performance Curves ..... 8

# Chapter 2 Specifications

**Supply Voltage**

10 V DC to 30 V DC (10% maximum ripple within specified limits) at less than 20 mA, exclusive of load

**Supply Protection Circuitry**

Protected against reverse polarity and transient voltages

**Sensing Beam**

Visible red LED, 640 nm

**Output Configuration**

Rating: 50 mA

**Off-state leakage current:** < 10 µA at 30 V DC

**ON-state saturation voltage:** < 2.3 V at 50 mA

Protected against output short-circuit, continuous overload, and false pulse on power-up

**Output Response**

850 µs, OFF to ON and ON to OFF

**Note:** 120-millisecond delay on power-up; outputs do not conduct during this time

**Repeatability**

125 µs

**Adjustments**

None

**Indicators**

Two LED indicators

Green solid: Power on

Amber solid: Light sensed

Amber flashing: Marginal sensing condition

**Connections**

-2M models: 2 m (6.5 ft) unterminated 4-wire PVC-jacketed cable

-Q models: 150 mm (6 in) PVC-jacketed cable with a 4-pin M8 male quick-disconnect connector

-Q5 models: 150 mm (6 in) PVC-jacketed cable with a 4-pin M12 male quick-disconnect connector

**Construction**

PC housing, lens cover; PVC cable

**Environmental Rating**

IP65

**Operating Conditions**

-25 °C to +55 °C (-13 °F to +131 °F)

95% at +50 °C maximum relative humidity (non-condensing)

**Application Notes**

To ignore shiny backgrounds, tilt the sensor so light is reflected away from sensor.

**Certifications**



**Required Overcurrent Protection**

**WARNING:** Electrical connections must be made by qualified personnel in accordance with local and national electrical codes and regulations.

Overcurrent protection is required to be provided by end product application per the supplied table.

Overcurrent protection may be provided with external fusing or via Current Limiting, Class 2 Power Supply.

Supply wiring leads < 24 AWG shall not be spliced.

For additional product support, go to [www.bannerengineering.com](http://www.bannerengineering.com).

Supply Wiring (AWG)	Required Overcurrent Protection (A)	Supply Wiring (AWG)	Required Overcurrent Protection (A)
20	5.0	26	1.0
22	3.0	28	0.8
24	2.0	30	0.5

## 2.1 Dimensions

All measurements are listed in millimeters [inches], unless noted otherwise. The measurements provided are subject to change.

Figure 1. M2 Models



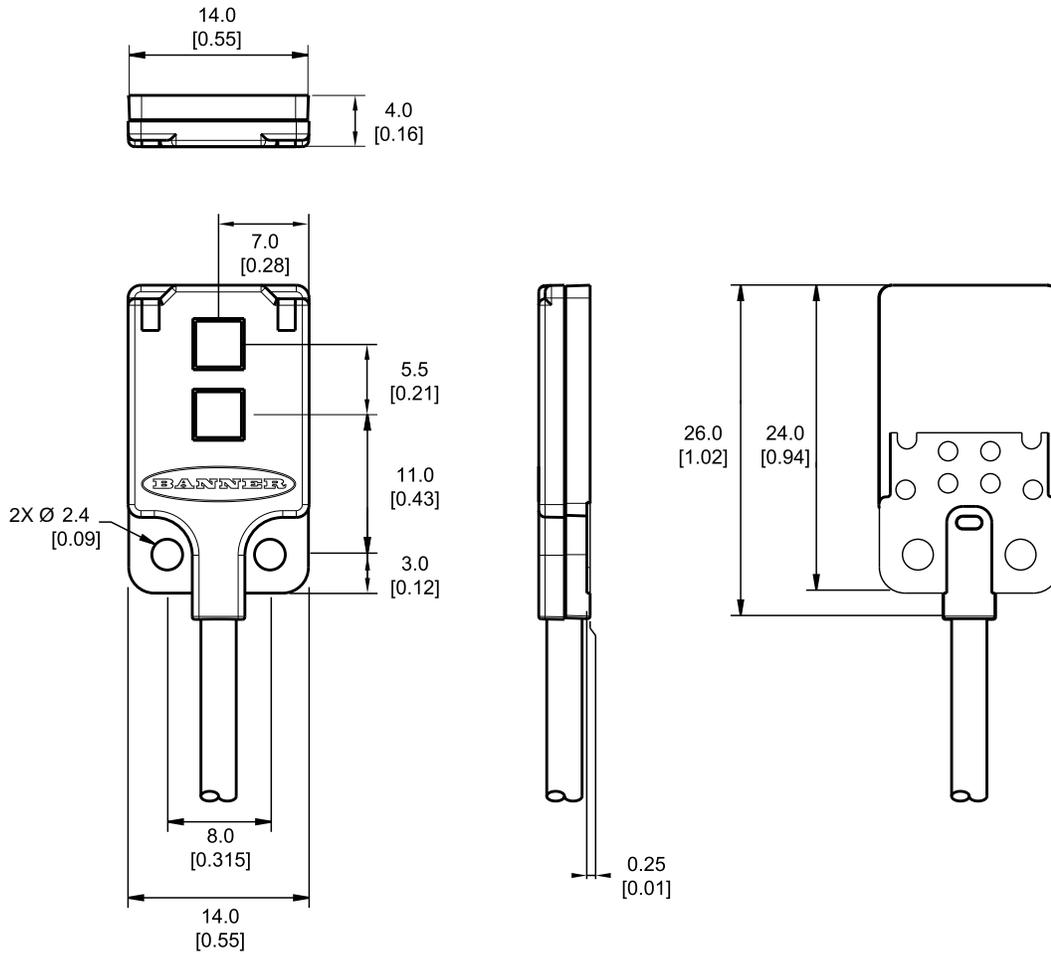


Figure 2. M3 Models

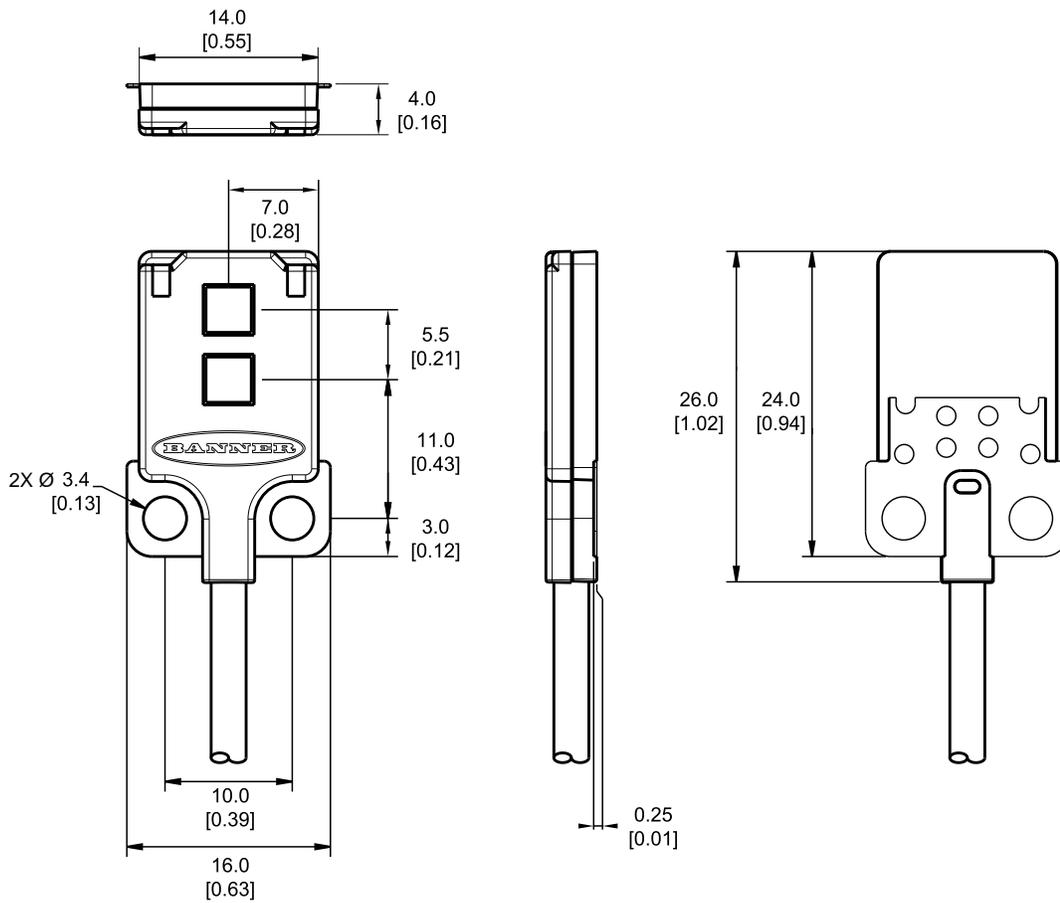


## 2.2 Performance Curves

Figure 3. Excess Gain (10 mm Models)

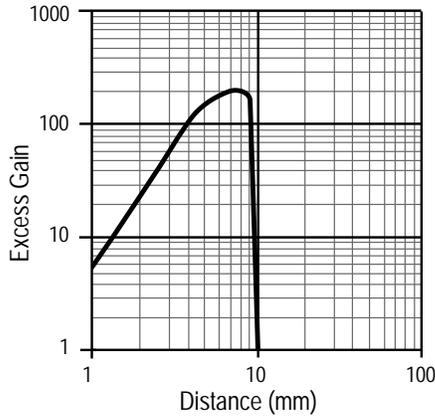


Typical Performance  
 Spot Size: 1.2 mm at 10 mm  
 Cutoff variation due to 90% to 6%; Color shift  $\leq 0.6$  mm

Figure 4. Excess Gain (15 mm Models)

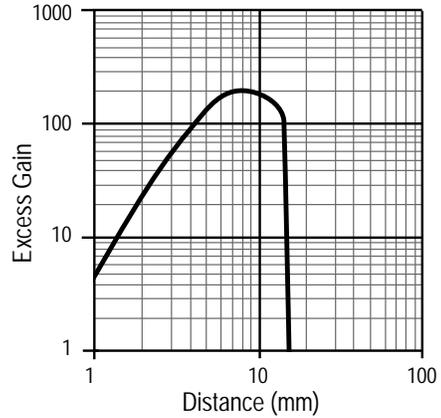


Typical Performance  
 Spot Size: 1.4 mm at 15 mm  
 Cutoff variation due to 90% to 6%; Color shift  $\leq 0.5$  mm

Figure 5. Excess Gain (30 mm Models)

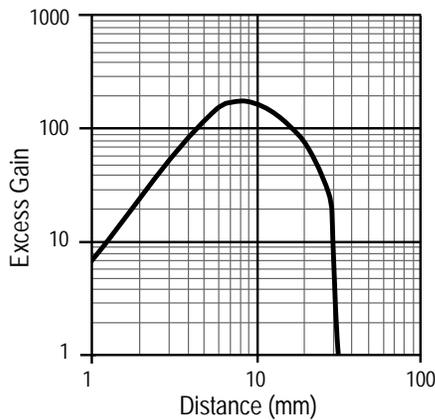

Typical Performance  
 Spot Size: 2.6 mm at 30 mm  
 Cutoff variation due to 90% to 6%; Color shift  $\leq 1.7$  mm

Figure 6. Excess Gain (45 mm Models)

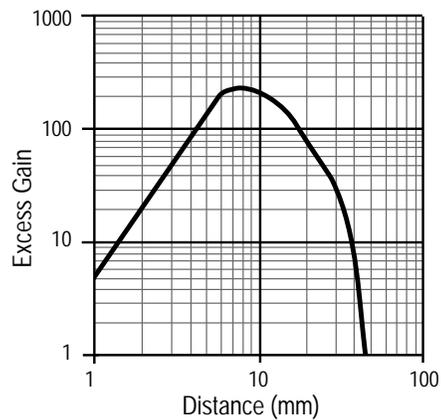

Typical Performance  
 Spot Size: 4.1 mm at 45 mm  
 Cutoff variation due to 90% to 6%; Color shift  $\leq 12.5$  mm

Chapter Contents

3.1 Mount the Device ..... 9  
 3.2 Wiring Diagrams ..... 9

# Chapter 3 Installation Instructions


## 3.1 Mount the Device

1. If a bracket is needed, mount the device onto the bracket.
2. Mount the device (or the device and the bracket) to the machine or equipment at the desired location. Do not tighten the mounting screws at this time.
3. Check the device alignment.
4. Tighten the mounting screws to secure the device (or the device and the bracket) in the aligned position.


## 3.2 Wiring Diagrams

Quick disconnect wiring diagrams are functionally identical.

**NPN Models**

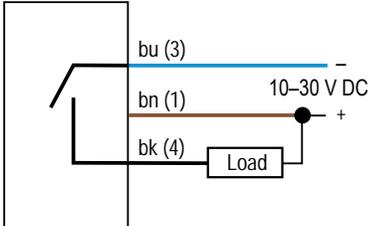


**PNP Models**

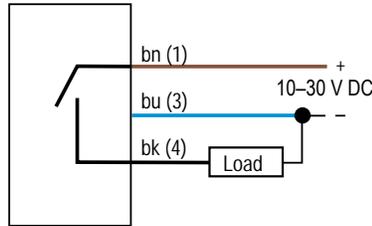


**Key: 4-pin A-Code M12 Male**

- 1 = Brown
- 3 = Blue
- 4 = Black



**Key: 4-pin A-Code M8 Male**

- 1 = Brown
- 3 = Blue
- 4 = Black



Chapter Contents

4.1 Cordsets ..... 10

# Chapter 4 Accessories

## 4.1 Cordsets

4-pin Single-Ended M8 Female Cordsets (datasheet p/n 236623)				
Model	Length	Dimensions (mm)	Pinout (Female)	
BC-M8F4-24-0.5	0.5 m (1.64 ft)			1 = Brown 2 = White 3 = Blue 4 = Black  
BC-M8F4-24-1	1 m (3.28 ft)			
BC-M8F4-24-2	2 m (6.56 ft)			
BC-M8F4-24-5	5 m (16.4 ft)			
BC-M8F4-24-8	8 m (26.25 ft)			
BC-M8F4-24-10	10 m (30.81 ft)			

4-pin Single-Ended M12 Female Cordsets (datasheet p/n 235937)				
Model	Length	Dimensions (mm)	Pinout (Female)	
BC-M12F4-22-1	1 m (3.28 ft)			1 = Brown 2 = White 3 = Blue 4 = Black 5 = Unused  
BC-M12F4-22-2	2 m (6.56 ft)			
BC-M12F4-22-5	5 m (16.4 ft)			
BC-M12F4-22-8	8 m (26.25 ft)			
BC-M12F4-22-10	10 m (30.81 ft)			
BC-M12F4-22-15	15 m (49.2 ft)			
BC-M12F4-22-20	20 m (65.61 ft)			
BC-M12F4-22-25	25 m (82.02 ft)			
BC-M12F4-22-30	30 m (98.42 ft)			

4-pin Single-Ended M12 Female Right-Angle Cordsets (datasheet p/n 235937)				
Model	Length	Dimensions (mm)	Pinout (Female)	
BC-M12F4A-22-1	1 m (3.28 ft)			1 = Brown 2 = White 3 = Blue 4 = Black 5 = Unused  
BC-M12F4A-22-2	2 m (6.56 ft)			
BC-M12F4A-22-5	5 m (16.4 ft)			
BC-M12F4A-22-8	8 m (26.25 ft)			
BC-M12F4A-22-10	10 m (30.81 ft)			
BC-M12F4A-22-15	15 m (49.2 ft)			

Chapter Contents

5.1 Clean with Mild Detergent and Warm Water ..... 11  
 5.2 Repairs ..... 11  
 5.3 Contact Us..... 11  
 5.4 Banner Engineering Corp Limited Warranty..... 11

# Chapter 5 Product Support and Maintenance

## 5.1 Clean with Mild Detergent and Warm Water

Handle the sensor with care during installation and operation. Sensor windows soiled by fingerprints, dust, water, oil, etc. create stray light that may degrade the peak performance of the sensor.

Wipe down the device with a soft cloth dampened with a mild detergent and warm water solution. Do not use any other chemicals for cleaning.

## 5.2 Repairs

Contact Banner Engineering for troubleshooting of this device. **Do not attempt any repairs to this Banner device; it contains no field-replaceable parts or components.** If the device, device part, or device component is determined to be defective by a Banner Applications Engineer, they will advise you of Banner's RMA (Return Merchandise Authorization) procedure.

**IMPORTANT:** If instructed to return the device, pack it with care. Damage that occurs in return shipping is not covered by warranty.

## 5.3 Contact Us

Banner Engineering Corp. | 9714 Tenth Avenue North | Plymouth, MN 55441, USA | Phone: + 1 888 373 6767

For worldwide locations and local representatives, visit [www.bannerengineering.com](http://www.bannerengineering.com).

## 5.4 Banner Engineering Corp Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

**THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.**

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. **IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.**

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: [www.bannerengineering.com](http://www.bannerengineering.com).

For patent information, see [www.bannerengineering.com/patents](http://www.bannerengineering.com/patents).

