EZ-LIGHT™

Extremely long life
(> 10 years)

T8L / T18
T30 / M18

Power-compatible with bus stations (ASi, ...) because of low power consumption and pin-assignment

CL50

Possible with seven functions with steady, flashing or alternating colours

K30L

K50FL

K50L

TL50

K80L

K80L QUAD

Shows different colours at the same time

Many installation options with connector, cable gland or protections tubes

Three types of connection:
- Pigtail M12
- Integral M12
- Integral cable (2m)

Robust and IP67 / IP69K



M22 and M30 standard threaded base for panel mounting



Up to 5 colours in the same device

Models with integrated buzzer

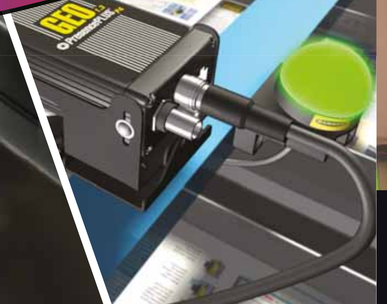

EZ-LIGHT™

www.bannereurope.com

BANNER®
more sensors, more solutions

COMPACT

T8L

T8LGRXPQP

M18

M18GRY2PQ

T18

T18GRYPQ

T30

T30GRY2PQ

COLUMN

Buzzer Option

CL50

CL50GXXPQ

CL50XRXPQ

CL50GRXPQ

CL50GRYPQ

Buzzer Option

TL50

TL50GYRQ

TL50BGYRQ

TL50WBGYRQ

DOME

K50L

K50LGRYPQ

K50LGRBPQ

K50LGRWPQ

K50L Buzzer

K50LGRA1YPQ — Continuous 75dB @ 1M

K50LGRA2YPQ — Pulsed 75dB @ 1M

K50LGRAL1YPQ — Continuous 95dB @ 1M

K30L

K30LGRYPQ

K30LGRBPQ

K30LGRWPQ

K50L 5-COLOUR

K50LGRYBWPQ8

K50LD

K50LDXGXPQ

K50LDXRXPQ

K50LDGRYPQ

ACCESSORIES

BRACKETS

T18 & M18

SMB1815SF

SA2218

SMB18A

SMB18FA

T30/K50
CL50 & TL50

SMB30A

SMB30FA

SMB30FVK

SMB30RAVK

K80

SMBDX80DIN

T8

SMB8MM

STANDOFF

300 mm

150 mm

SOK-K50L-150SS (for K50)
SOK-TL50-150SS (for TL50)

75 mm

SA-M30M30-75

SOK-K50L-300SS (for K50)
SOK-TL50-300SS (for TL50)

K80L QUAD

K80L4GRYB1PQ

K80L4GRYB1P — Terminal Wire

K80L

K80LGRY2PQ

K80LGRYPQ

K80LGRYP — Terminal Wire

K80L 5-COLOUR

K80LGRYBWP — Terminal Wire

K50FL

K50FLGRYPQ

K50FLGRBPQ

K50LGRWPQ

K50FL 5-COLOUR

K50FLGRYBWPQ8 — Terminal Wire

Other colours and combinations available

WALL MOUNTABLE

K80L buzzer

K80LGRA1YPQ — Continuous 75dB @ 1M

K80LGRA2YPQ — Pulsed 75dB @ 1M

K80LGRAL1YPQ — Continuous 95dB @ 1M

EN 2011 Mar Reprint PN F111RevA