

Wireless Solutions for Compost Temperature Monitoring



BANNER[®]

more sensors, more solutions

www.bannerengineering.com/eu



Banner Engineering EMEA
Park Lane, Culliganlaan 2F
1831 Diegem | Belgium

☎ +32 (2) 456 07 80

www.bannerengineering.com/eu
mail@bannerengineering.com

Wireless Solutions for Compost Temperature Monitoring

Wireless Compost Probe

- Cap cover and sun protection bracket
- GoreTex plug minimizes condensation
- Integrated rotary switches offer simple probe identification
- LED for radio link status
- Robust hanger
- Battery life up to 3 years



Control Room


Radio Master can accommodate up to 48 probes in a single network and multiple networks can be collocated. The SureCross Performance Gateway offers network range up to 3 km with line of sight.



Full stainless steel
1,5 meter probe

3 points of measurement
every 0,5 meter to guarantee
hygienization of compost

Sharp end point
simplifies installation

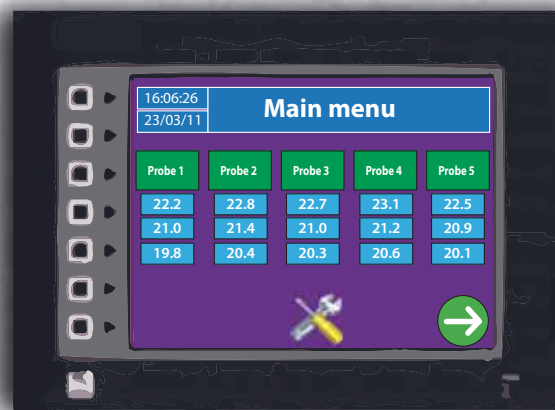

HMI options provide:

- Temperature visualisation for each probe
- Graphical history display for three days of temperature values
- On-board data archive
- PC interface for automatic upload of data to a central control location

SENSORS



VISION



WIRELESS I/O



LIGHTING & INDICATORS



SAFETY



Banner offers a full range of sensing solutions
www.bannerengineering.com/eu

