


8	7	6	5	4	3	2	1
MODEL NO.	"L"	P/N					
BT1.56ST5M900	1829 [72]	801407					

NOTES: FIBER FUSED TOGETHER ON THREADED END, NO EPOXY USED.
 MAXIMUM CONTINUOUS OPERATING TEMPERATURE IS 900°F.
 NOT FOR USE IN DIO SENSORS.

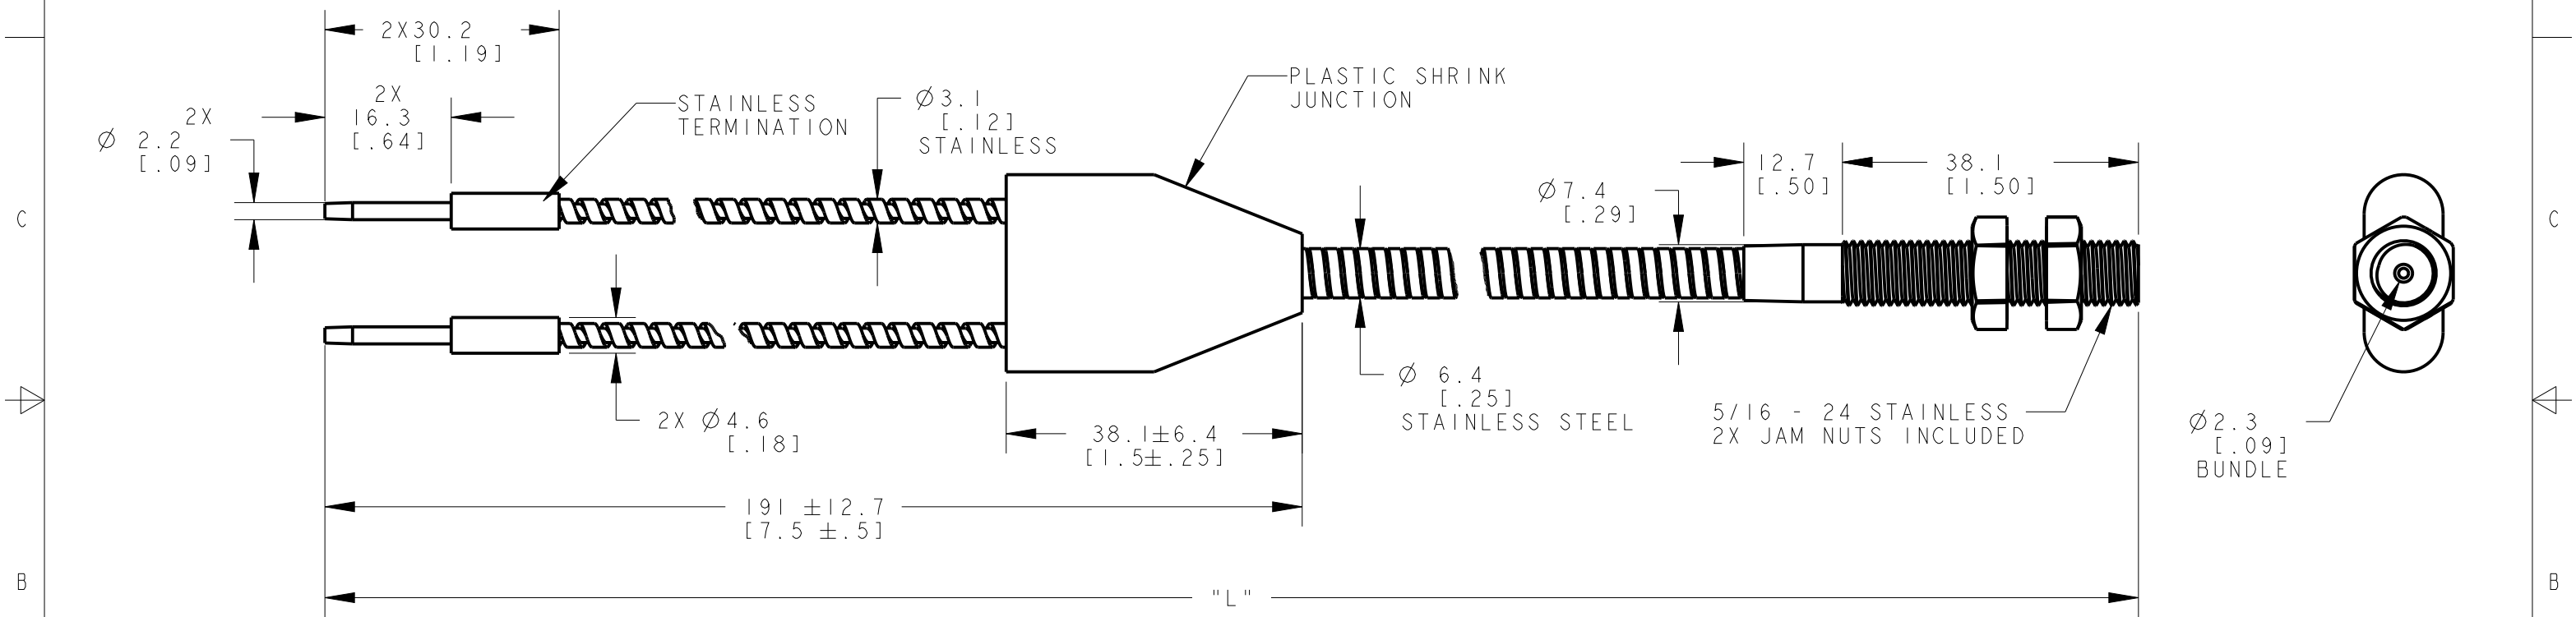


NOTES:
 1. ALL DIMENSIONS ARE MILLIMETERS [INCHES] UNLESS OTHERWISE NOTED.
 2. REFER TO "www.bannerengineering.com" FOR ADDITIONAL DATA AND SPECIFICATIONS.

This drawing is the property of BANNER ENGINEERING CORP. Any use or reproduction, in any form, without prior written permission of Banner is prohibited. © 2015 Banner Engineering Corp.

BANNER BANNER ENGINEERING CORP.
 www.bannerengineering.com

THIRD ANGLE PROJECTION



TITLE
BT1.5 M900 SERIES SS TERMINATED/PLASTIC FIBER SENSOR

SIZE B	DRAWING NO. 195903	REV. A
SCALE 5:4	SHEET 1 OF 1	

CREO