

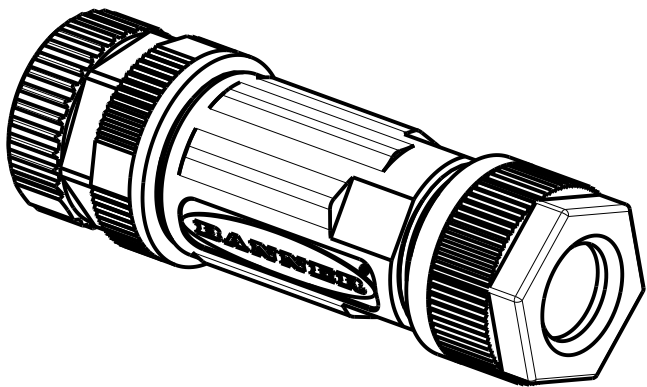
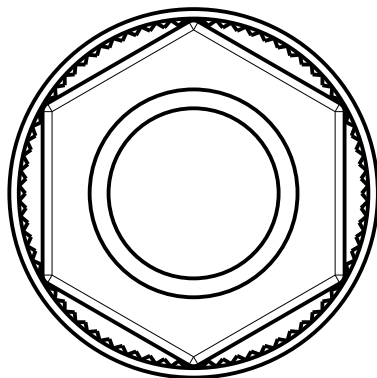


| SPECIFICATIONS | |
|--|------------------------------|
| RATED CURRENT | 4 AMP |
| RATED VOLTAGE | 250 VOLTS |
| WITHSTANDING VOLTAGE | 1000 V/60 Hz AT 1 MINUTE |
| INSULATION RESISTANCE | GREATER THAN/EQUAL TO 100 MΩ |
| WIRE RANGE | 20-24 AWG |
| WIRE STRIP LENGTH OF THE INDIVIDUAL WIRE | 8mm |
| WIRE STRIP LENGTH OF SHEATH | 24mm |
| OPERATING TEMPERATURE | -40°C TO +85°C |
| DEGREE OF PROTECTION | IP68 |

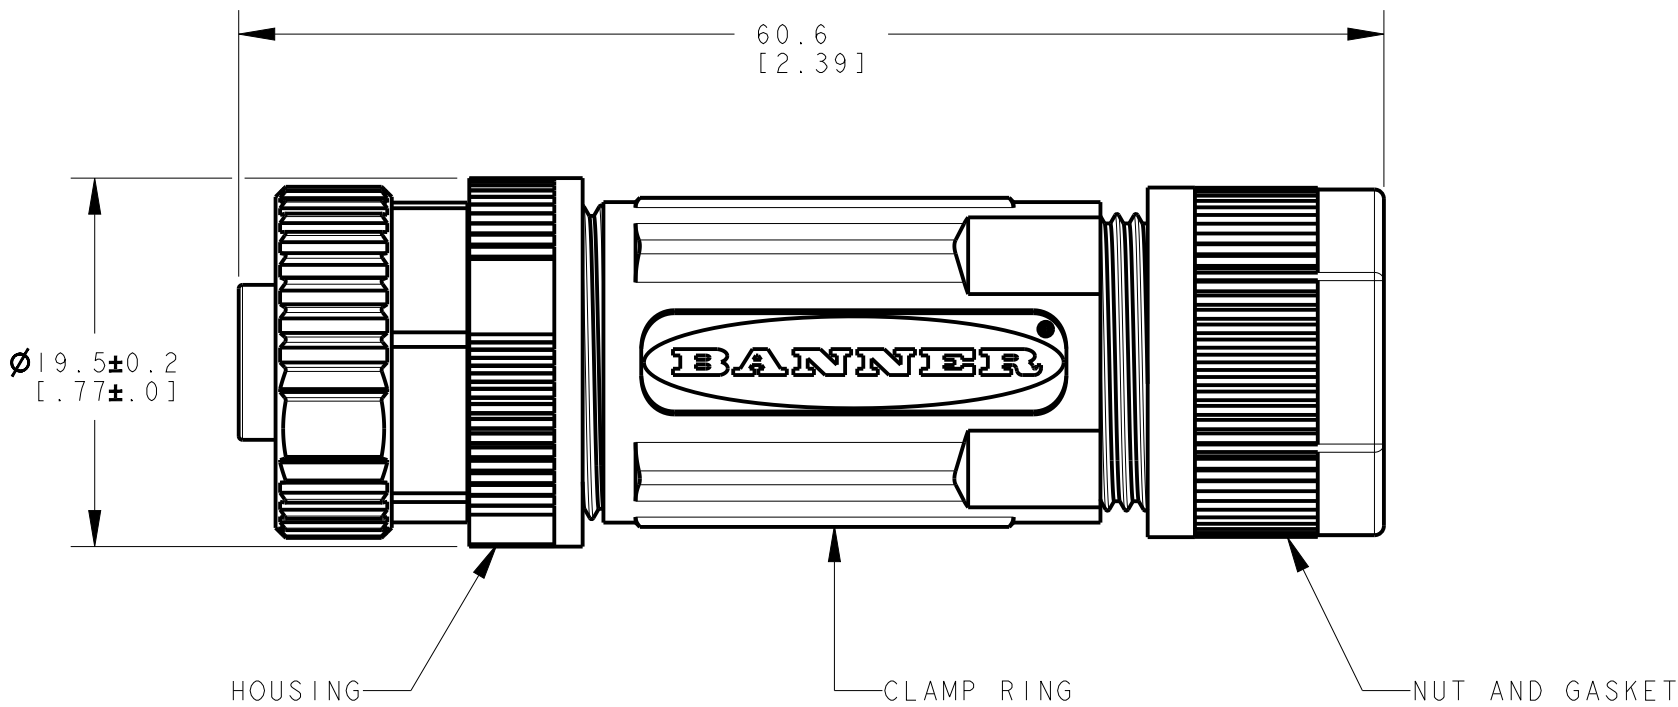


ISOMETRIC VIEW
SCALE 3:2

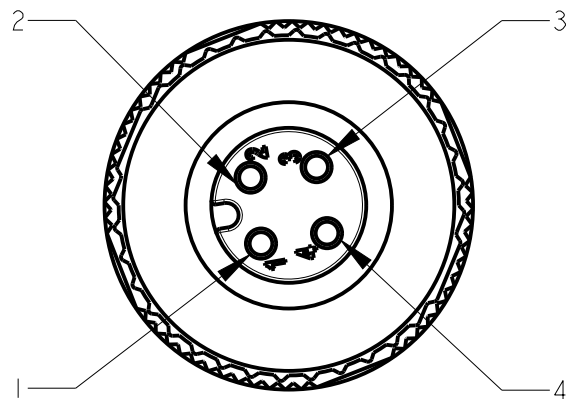

NOTES:
1. ALL DIMENSIONS ARE MILLIMETERS [INCHES] UNLESS OTHERWISE NOTED.
2. REFER TO "www.bannerengineering.com" FOR ADDITIONAL DATA AND SPECIFICATIONS.

This drawing is the property of BANNER ENGINEERING CORP. Any use or reproduction, in any form, without prior written permission of Banner is prohibited.
© 2015 Banner Engineering Corp.

THIRD ANGLE PROJECTION



BANNER ENGINEERING CORP.
www.bannerengineering.com

TITLE

BFW-M12F4-6SL

SIZE
C

DRAWING NO. **246778**

REV. **A**

SCALE 5:2

SHEET 1 OF 1

CREO