



REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL APPROVAL;	10-2-13	R. LEONARD J. STENGER

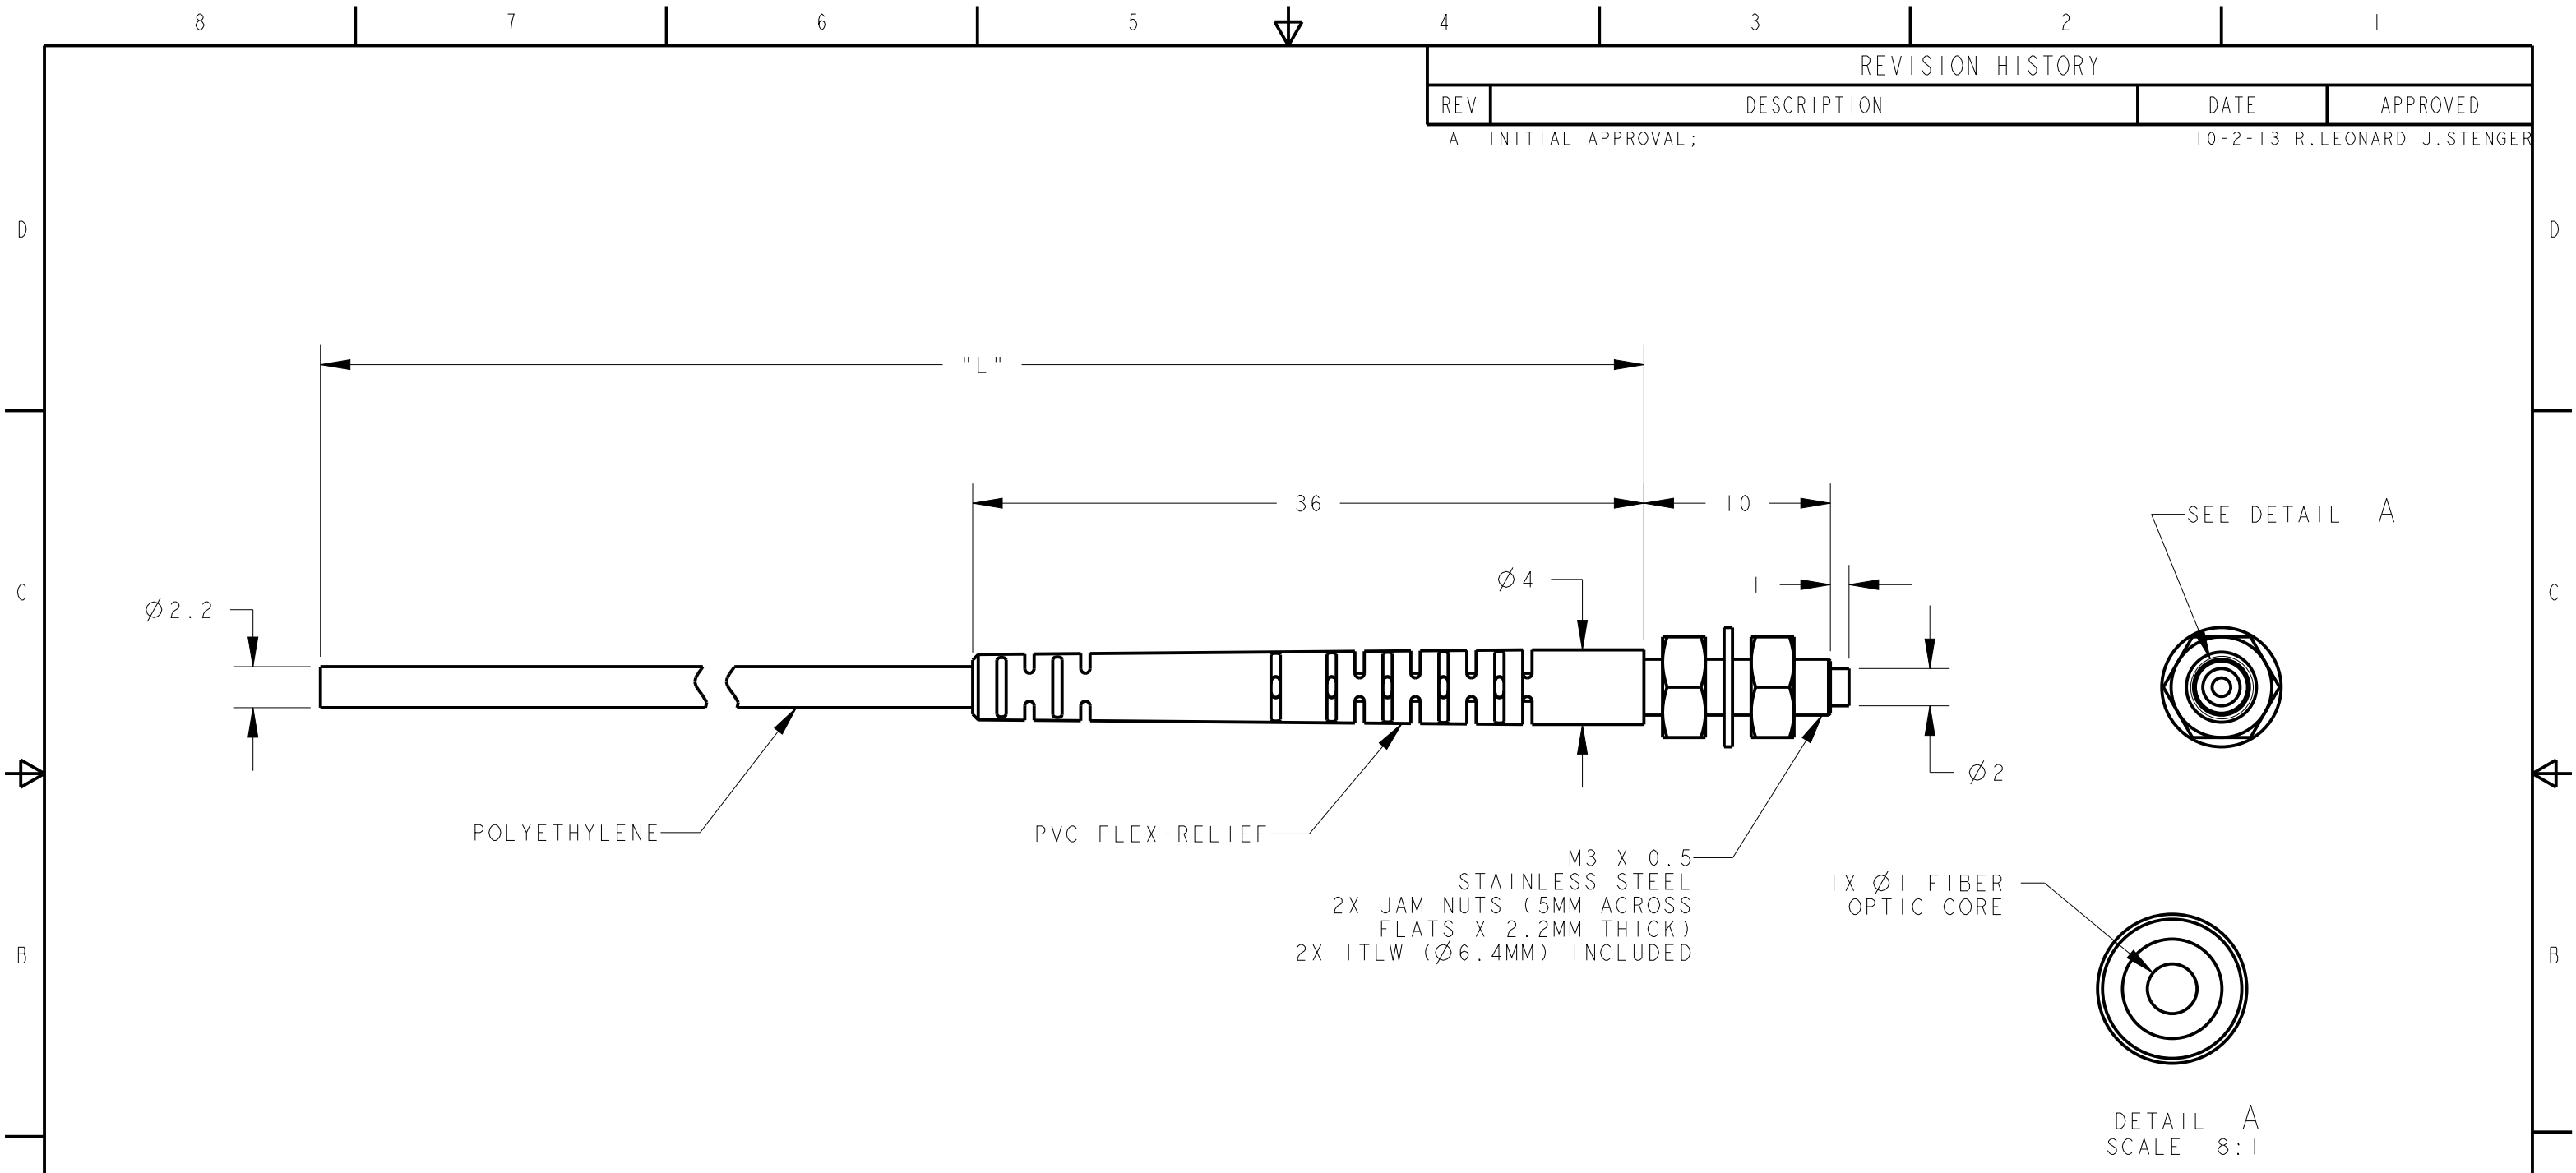

MODEL NO.	"L"	P/N
PIT46UM3-VL	2000	85748
PIT43UM3-VL	1000	85747

NOTES:
 1. OPERATING TEMPERATURE -55°C ~ +70°C.
 2. MINIMUM BEND RADIUS R25.

Dimensions are Millimeters [inches] TOLERANCES (Unless Otherwise Specified) X = ±0.5mm X.X = ±0.25 X.XX = ±0.12mm [X.X = ±.1"] [.XX = ±.01"] [.XXX = ±.005"] ANGLE = ±3° "L" = 40mm/Meter [.5"/Foot]	 <p>BANNER ENGINEERING Corp. 9717 10th Ave. North Minneapolis, MN 55441 Tel # 763-544-3164 Fax # 763-544-3573 www.bannerengineering.com</p>		
		This drawing is the property of BANNER ENGINEERING Corp. and is proprietary in general and in detail. Its contents shall not be revealed to outside parties without the written consent of BANNER.	
PIT43UM3-VL PLASTIC FIBEROPTIC ASSEMBLY & MOD'S			
9-17-13	1 OF 1	87547	A