

MAXI-BEAM® Power Blocks and Wiring Base



Datasheet



WARNING: Not To Be Used for Personnel Protection

Never use this device as a sensing device for personnel protection. Doing so could lead to serious injury or death. This device does not include the self-checking redundant circuitry necessary to allow its use in personnel safety applications. A sensor failure or malfunction can cause either an energized or de-energized sensor output condition.

Overview


Banner MAXI-BEAM® sensors are highly versatile, self-contained, modularized photoelectric sensing controls that are ideally suited to industrial environments. The basic MAXI-BEAM is an ON/OFF switch consisting of three modules (sensor head, power block, and wiring base) and a unique, patented, rotatable programming ring that enables you to program your choice of light or dark operate mode, sensing range, and response time.

MAXI-BEAM sensor heads have an easily-accessible multi-turn sensitivity control for precise adjustment of system gain. Interchangeable sensor heads are rotatable in 90-degree increments and are available in retroreflective, diffuse, opposed, convergent, fixed-field proximity, and fiberoptic sensing modes. Each sensor head also includes Banner's exclusive, patented AID™ circuit (Alignment Indicating Device, US Patent no. 4356393), which features an LED alignment indicator that lights whenever the sensor sees its own modulated light source, and pulses at a rate proportional to the strength of the received light signal.

A wide selection of MAXI-BEAM power block modules is available to interface the sensor head to the circuit to be controlled. The plug-in design of the wiring base enables easy exchange of the entire sensing electronics without disturbing field wiring.

Optional customer-installable logic modules easily convert the basic ON/OFF MAXI-BEAM into either a one-shot or delay logic function control, with several programmable timing ranges for each function.

MAXI-BEAM sensors are ruggedly constructed of molded PBT to NEMA standards 1, 3, 4, 12, and 13, and have interchangeable molded acrylic lenses. Modules simply snap and bolt together, with no interwiring necessary. Module interfaces are o-ring and quad-ring sealed for the ultimate in dust, dirt, and moisture resistance.

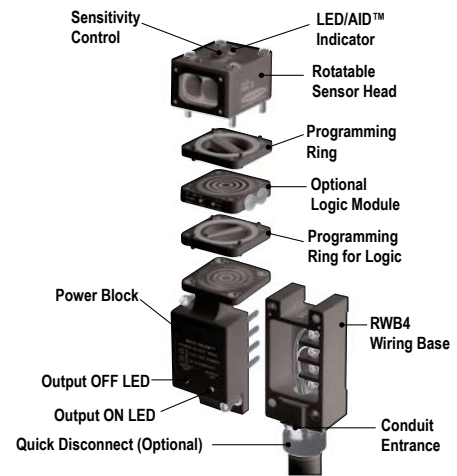

Models RPBT and RPBT-1

Use model RPBT-1 to power the model RSBE, RSBESR, or RSBEF emitter sensor head. RPBT-1 has an input range of 10 V dc to 30 V dc, and no switching elements.

Models	Input	Output
RPBT		Bipolar; one open collector NPN and one PNP open collector transistor, 250 mA continuous, short circuit and reverse-polarity protected (both outputs).
RPBT-1	10 V dc to 30 V dc, 20 mA exclusive of load; 10% maximum ripple	On-state voltage drop: <ul style="list-style-type: none"> • PNP output is less than 1 volt at 10 mA and less than 2 volts at 250 mA • NPN output less than 200 millivolts at 10 mA and less than 1 volt at 250 mA Off-state leakage current is less than 10 microamps.

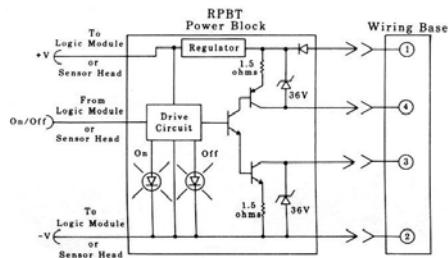


Figure 1. RPBT and RPBT-1—Schematic

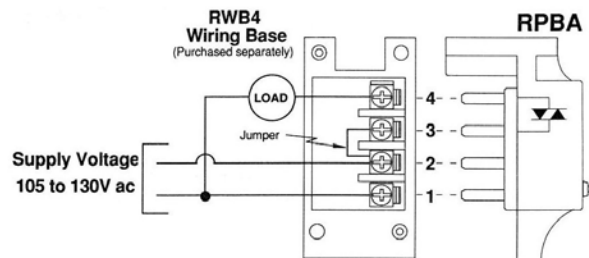


Figure 2. RPBT and RPBT-1—Wiring Diagram



Models RPBA & RPBA-1

Use model RPBA-1 to power the model RSBE, RSBERS, or RSBEF emitter sensor head. RPBA-1 has an input range of 105 V ac to 130 V ac, and no switching element. AC loads require up to 8.3 milliseconds to turn off in addition to the response time of the sensor head and delay logic (if any).

Models	Input	Output
RPBA		SPST solid state switch for ac, 3/4 amp. maximum (derated to 1/2 amp at 70 °C).
RPBA-1	105 V ac to 130 V ac (50/60 Hz); 2 watts, exclusive of load	Maximum inrush is 10 amps for 1 second or 30 amps for one ac cycle (non-repeating). On state voltage drop of less than 2.5 V ac at full load. Off state leakage current is less than 100 microamps.

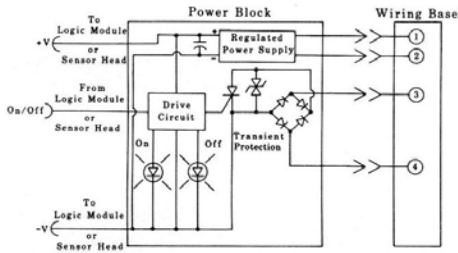


Figure 3. RPBA & RPBA-1—Schematic

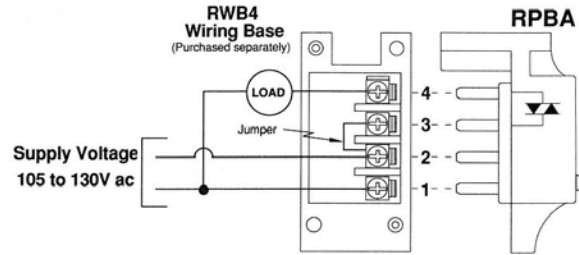


Figure 4. RPBA & RPBA-1—Wiring Diagram



WARNING: Connecting the voltage directly across pins 3 and 4 without a load present will destroy the switching element.

Models RPBB and RPBB-1

Use model RPBB-1 to power the model RSBE, RSBERS, or RSBEF emitter sensor head. RPBB-1 has an input range of 210 V ac to 260 V ac, and no switching element. AC loads require up to 8.3 milliseconds to turn off in addition to the response time of the sensor head and delay logic (if any).

Models	Input	Output
RPBB		SPST solid state switch for ac, 3/4 amp. maximum (derated to 1/2 amp at 70 °C).
RPBB-1	210 V ac to 250V ac (50/60 Hz); 2 watts, exclusive of load	Maximum inrush is 10 amps for 1 second or 30 amps for one ac cycle (non-repeating). On state voltage drop of less than 2.5 V ac at full load. Off state leakage current is less than 100 microamps.

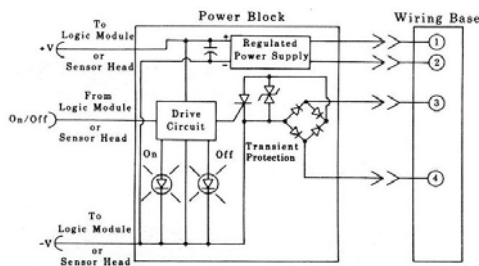


Figure 5. RPBB and RPBB-1—Schematic

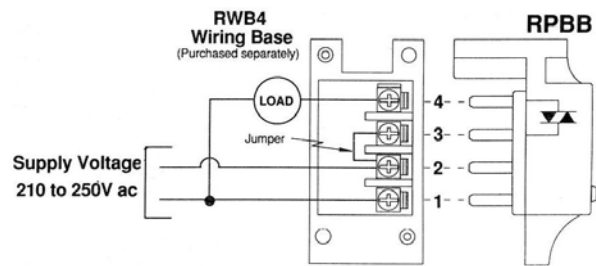


Figure 6. RPBB and RPBB-1—Wiring Diagram



WARNING: Connecting the voltage directly across pins 3 and 4 without a load present will destroy the switching element.

Models R2PBA & R2PBB

Using a 2-wire power block requires programming the sensor head to 2W (2-wire) operating mode.

Models	Input	Output
R2PBA	105 V ac to 130 V ac (50/60 Hz), 2 watts exclusive of load	SPST solid-state switch for ac, 3/4 amp maximum (derated to 1/2 amp at 70 °C). Maximum inrush is 10 amps for 1 second (non-repeating).
R2PBB	210 V ac to 250 V ac (50/60 Hz), 2 watts exclusive of load	On-state voltage drop is 5.2 V rms at a 1/2 amp load; 14 V rms at a load of 10 milliamps. Off-state leakage current is less than 1.7 milliamps (resistive or inductive load).

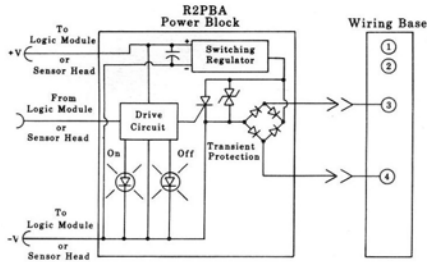


Figure 7. R2PBA & R2PBB—Schematic

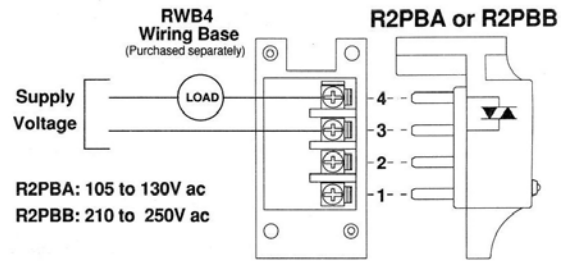


Figure 8. R2PBA & R2PBB—Wiring Diagram



WARNING: All components of a MAXI-BEAM 2-wire assembly will be destroyed if the load becomes a short circuit.

Model RPBR

Models	Input	Output
RPBR	12 V ac to 250 V ac (50/60 Hz) or 12 V dc to 30 V dc, 40 mA exclusive of load at 30 V dc	SPST electromechanical relay; 250 V ac maximum, 30 V dc maximum, 5 amps maximum. Peak switching voltage is 750 V ac (install MOV across contact if switching inductive load). Mechanical life of relay is 10,000,000 operations. Contact response time is 20 milliseconds, open and close.

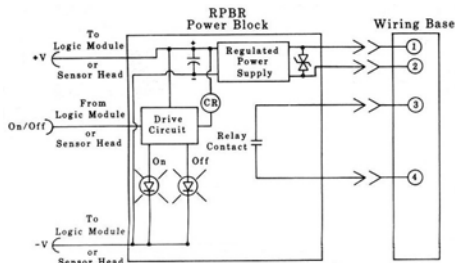


Figure 9. RPBR—Schematic

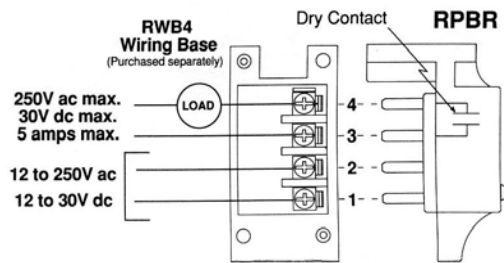


Figure 10. RPBR—Wiring Diagram

Model RPBR2

Models	Input	Output
RPBR2	12 V ac to 250 V ac (50/60 Hz) or 12 V ac to 30 V dc, 40 mA exclusive of load at 30 V dc	SPDT electromechanical relay; 250 V ac maximum, 30 V dc maximum, 5 amps maximum. Peak switching voltage is 750 V ac (install MOV across contact if switching inductive load). Mechanical life of relay is 10,000,000 operations. Contact response time is 20 milliseconds, open and close.

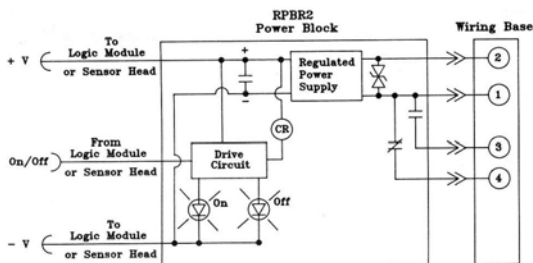


Figure 11. RPBR2—Schematic

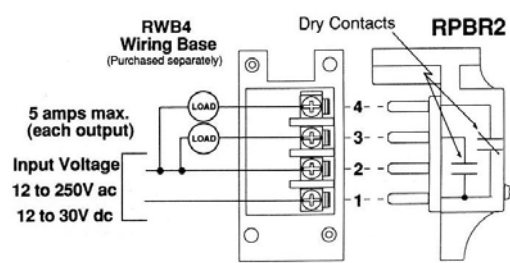


Figure 12. RPBR2—Wiring Diagram

Model RPBU

Models	Input	Output
RPBU	12 V ac to 250 V ac (50/60 Hz) or 12 V dc to 30 V dc, 40 mA exclusive of load at 30 V dc	Optically-isolated SPST solid-state relay; 240 V ac or dc maximum, 100 mA maximum. On-state voltage drop is 2 volts maximum at 100 mA (full rated load). DC hookup is without regard to polarity.

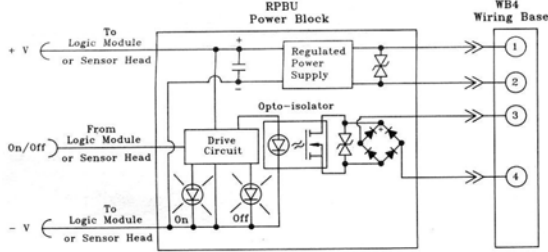


Figure 13. RPBU—Schematic

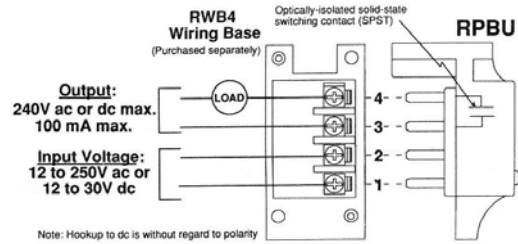


Figure 14. RPBU—Wiring Diagram



WARNING: Connecting voltage directly across pins 3 and 4 without a load present will destroy the switching element.

Model RPBTLM Low Profile Power Block

Model RPBTLM is a miniature dc power block for MAXI-BEAM sensors. It may be used with any of the MAXI-BEAM sensor head models. It also allows timing logic modules to be added if needed.

The RPBTLM is supplied with stainless steel hardware used for assembly of the MAXI-BEAM components. Components simply bolt together, with no interwiring necessary. The screws supplied are extra-long, and serve as a means to mount the complete MAXI-BEAM sensor assembly to an object or surface.

The RPBTLM may be attached to its sensor head at any of four 90-degree increments to allow the best cable exit direction (front, rear, or either side). A logic module, if used, can be independently rotated in the same manner for easiest access to the timing adjustments.



Outputs are in the bipolar configuration: one NPN (current-sinking) and one PNP (current-sourcing). This design permits direct interfacing of the MAXI-BEAM sensor to almost any type of dc logic input. Either output may be used alone, or both may be used simultaneously. The outputs may be configured for either normally open or normally closed operation using the sensor head (or logic module) programming ring.

Both outputs are rated for 150 milliamps, sufficient capacity for direct switching of most electromechanical dc loads such as relays and solenoids. The RPBTLM includes an LED indicator to show the output status.

The RPBTLM is completely solid-state and epoxy-encapsulated. It is gasketed to other MAXI-BEAM components by a quad-ring seal. Refer to the data sheets for MAXI-BEAM sensor heads (p/n 03416) and MAXI-BEAM logic modules (p/n 03417) or www.bannerengineering.com for complete information on the assembly and programming of MAXI-BEAM sensor components.

Models	Input	Output
RPBTLM	10 V dc to 30 V dc, 10% maximum ripple.	Output Configuration: Bipolar, one NPN (current-sinking) and one PNP (current sourcing) open-collector transistor switch. Output Rating: 150 mA maximum each output at 25 °C (derated to 100 mA at 70 °C). Derate 1 mA per °C.

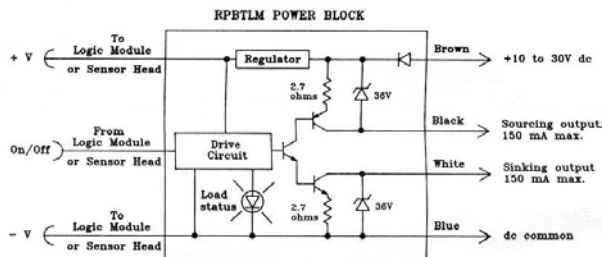


Figure 15. RPBTLM—Schematic

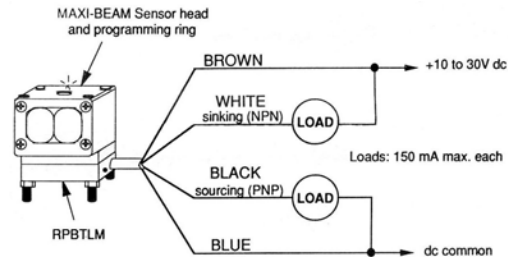


Figure 16. RPBTLM—Wiring Diagram

The RPBTLM powers the sensor head from a 10 V dc to 30 V dc supply. It contains output circuitry to allow an interface of the signal from the sensor head to a load or to a logic input.

The RPBTLM offers bipolar outputs: one NPN (current sinking) and one PNP (current sourcing). Either output may be used, or both outputs may be used at the same time. The switching capacity of each output is 150 mA maximum.

Specifications

The following specifications include the RWB4 Wiring Base and all power block models listed in this datasheet except RPBTLM.

False Pulse Suppression on Power-up

All models

Construction

Reinforced molded PBT housing
Electronic components are fully epoxy encapsulated
O-ring seal between components

Environmental Rating

NEMA 1, 3, 4, 12, and 13

Operating Temperature

-40 °C to +70 °C (-40 °F to +158 °F), except RPBR and RPBR2 (see below)
RPBR and RPBR2: -40 °C to +50 °C (-40 °F to +122 °F)

Certifications



Except RPBU,
RPBR, RPBR2,
RQB4



IND. CONT. EQ.
447Y
LISTED
Except RPBU, RPBR2, RWB4

Required Overcurrent Protection




WARNING: Electrical connections must be made by qualified personnel in accordance with local and national electrical codes and regulations.

Overcurrent protection is required to be provided by end product application per the supplied table.
Overcurrent protection may be provided with external fusing or via Current Limiting, Class 2 Power Supply.
Supply wiring leads < 24 AWG shall not be spliced.
For additional product support, go to www.bannerengineering.com.

Supply Wiring (AWG)	Required Overcurrent Protection (Amps)
20	5.0
22	3.0
24	2.0
26	1.0
28	0.8
30	0.5

Dimensions

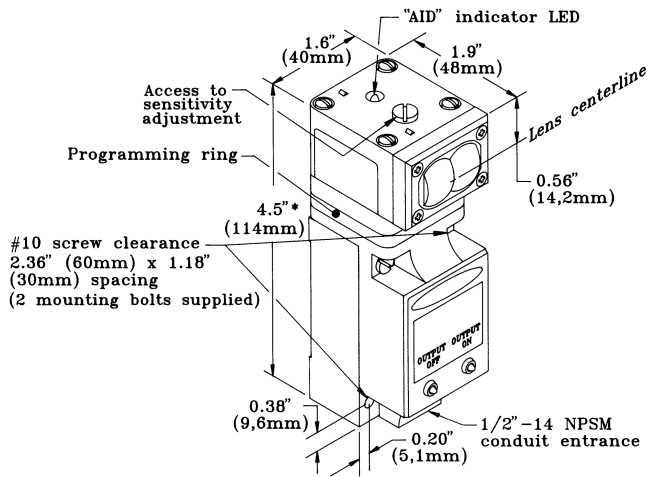

* 5.0" (127mm) with logic module and second programming ring installed.

Specifications: RPBTLM

Input

10 V dc to 30 V dc, 10% maximum ripple

Output Configuration

Bipolar, one NPN (current-sinking) and one PNP (current sourcing) open-collector transistor switch

Output Rating

150 mA maximum each output at 25 °C (derated to 100 mA at 70 °C). Derate 1 mA per °C

Output Protection

Protected against false pulse on power-up, inductive load transients, power supply polarity reversal, and continuous overload or short-circuit of outputs

On-state Voltage Drop

NPN output less than 200 millivolts at 10 mA and less than one volt at 150 mA
PNP output less than 1 volt at 10 mA and less than 2 volts at 150 mA


Off-state Leakage Current

Less than 1 microamp

Certifications



Dimensions—RPBTLM

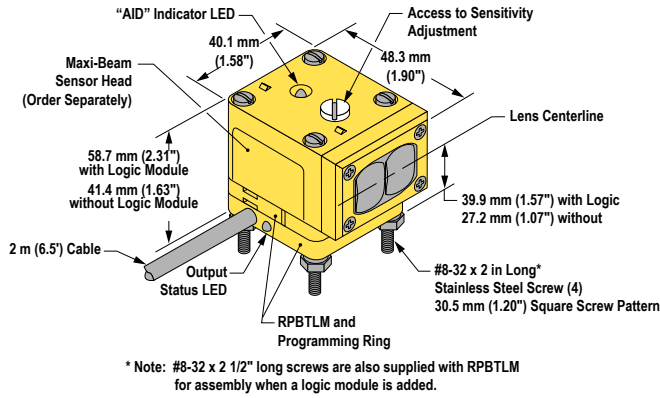

Ordering Information

To order a MAXI-BEAM, follow these steps:

1. Select a sensor head module.
2. Select a power block module.
3. Select a wiring base. The wiring base is purchased separately from the power block.
4. Select a logic module (if needed).
5. Select accessories as needed (see www.bannerengineering.com).

Sensor Head Models

Sensor head modules are described in datasheet p/n 03416.

Model	Sensing Type	Range
RSBE and RSBR	Opposed mode	91.4 m (300 ft)
RSBESR and RSBRSR	Opposed mode (short range; narrow beam)	4.6 m (15 ft)
RSBLV	Retroreflective mode	9.1 m (30 ft)
RSBLVAG	Retroreflective mode (anti-glare filter)	4.6 m (15 ft)
RSBD	Long range diffuse proximity mode	1.5 m (5 ft)
RSBDSR	Short-range diffuse proximity mode	762 mm (30 in)
RSBCV	Visible red convergent mode,	Focus at: 38.1 mm (1.5 in)
RSBC	Infrared convergent mode	Focus at: 38.1 mm (1.5 in)

Model	Sensing Type	Range
RSBF	Infrared fiber optic; for glass fibers	Varies depending on the fiber optics used
RSBFV	Visible red fiber optic; for glass fibers	
RSBEF and RSBRF	Infrared fiber optic opposed mode; for glass fibers	
RSBFP	Visible red fiber optic; for plastic fibers	
RSBFF50	Fixed-field proximity	Sharp far-limit cutoff at 50 mm (2 in)
RSBFF100		Sharp far-limit cutoff at 100 mm (3.9 in)

Power Block Module Models

Power Block modules are described in datasheet p/n 03418.

Model	Supply Voltage	Output Type
RPBT	10–30 V dc	one sinking and one sourcing solid-state output
RPBT-1		for use with RSBE, ESR, EF emitters (no output circuit)
RPBTLM	10–30 V dc Low-profile power block (requires no RWB4 wiring base)	
RPBA	105–130 V ac (50/60 Hz)	SPST solid-state output
RPBA-1		for use with emitter (no output circuit)
R2PBA, 2-wire operation		SPST solid-state output

Model	Supply Voltage	Output Type
RPBB	210 V ac to 250 V ac (50/60 Hz)	SPST solid-state output
RPBB-1		use with emitter (no output circuit)
R2PBB, 2-wire operation		SPST solid-state output
RPBU	12–250 V ac or 12–30 V dc	SPST solid-state output (ac or dc)
RPBR	12–250 V ac (50/60 Hz) or 12–30 V dc	SPST E/M relay output
RPBR2		SPDT E/M relay output

Wiring Base Models

Wiring Base modules are described in datasheet p/n 03418.

Model	Description
RWB4	4-terminal wiring base for all models (except RPBTLM)

Logic Module Models

Logic modules are described in datasheet p/n 03417.

Model	Description
RLM5	On/Off delay (both functions adjustable up to 15 seconds)
RLM8	Delayed One-Shot (delay and pulse adjustable up to 15 seconds)

Banner Engineering Corp. Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. **IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.**

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: www.bannerengineering.com.