

# K50 Pro Select Indicator Product Manual



Original Instructions

p/n: 242057 Rev. A

06-Sep-24

© Banner Engineering Corp. All rights reserved.

# Contents

## Chapter 1 Features

Models .....	3
--------------	---

## Chapter 2 Wiring..... 4

## Chapter 3 Pro Editor

Full Preview Connection (Required) .....	5
K50 Pro Select Pro Editor Program Options .....	5
Discrete Control .....	6
Pulse Control .....	8

## Chapter 4 Specifications

FCC Part 15 Class B for Unintentional Radiators.....	11
Industry Canada ICES-003(B).....	11
Dimensions.....	12

## Chapter 5 Accessories

Pro Editor Hardware .....	13
Cordsets .....	13
Brackets.....	14
Wash-Down Cover.....	16
Elevated Mount System.....	16


## Chapter 6 Banner Engineering Corp Limited Warranty ..... 17

Chapter Contents

Models ..... 3

# Chapter 1 Features

*50 mm Programmable Multicolor RGB Indicator*

	<ul style="list-style-type: none"> <li>• Bright, uniform indicator light</li> <li>• Seven default colors in one device (Green, Red, Yellow, Blue, White, Cyan, Magenta)</li> <li>• Programmable using Banner's Pro Editor software and Pro Converter Cable</li> <li>• 30 mm threaded polycarbonate base</li> <li>• Translucent polycarbonate dome</li> <li>• Rugged IP66, IP67, IP69K per ISO 20653 and UL Type 4X and UL Type 13 design</li> <li>• Bimodal inputs (PNP/NPN), depending on source wiring</li> </ul>
---	---

## Models


Family	Style	Color and Input	Connector <sup>(1)</sup>
K50	PSL	RGB7	Q
	PSL = Pro Select Indicator	RGB7 = RGB Multicolor (7 colors)	Q = Integral 5-pin M12 male quick-disconnect connector

<sup>(1)</sup> Models with a quick-disconnect connector require a mating cordset.

Chapter Contents

# Chapter 2 Wiring

5-pin/Wire Models

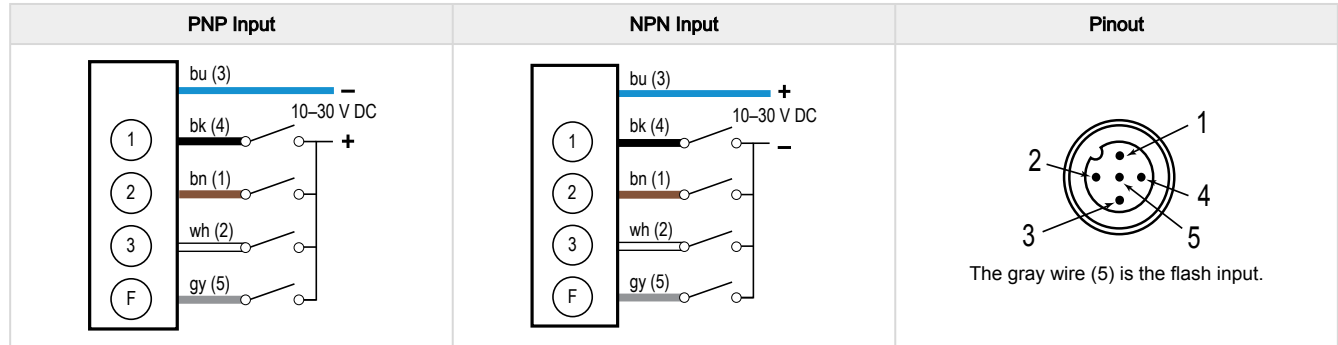

Default Color Definition


	Red	Yellow	Green	Cyan	Blue	Magenta	White
Input 1	X	X				X	X
Input 2		X	X	X			X
Input 3				X	X	X	X

An "X" denotes an active input. For example, when Input 1 and Input 3 are active, the indicator is magenta.

Chapter Contents

Full Preview Connection (Required)..... 5  
K50 Pro Select Pro Editor Program Options ..... 5


# Chapter 3 Pro Editor



Use Banner's Pro Editor software and Pro Converter Cable to create custom configurations by selecting different colors, flash patterns, and animations. For more information visit [www.bannerengineering.com/proeditor](http://www.bannerengineering.com/proeditor).

## Full Preview Connection (Required)


The full preview connection must be used for the K50 Pro Select Indicator.

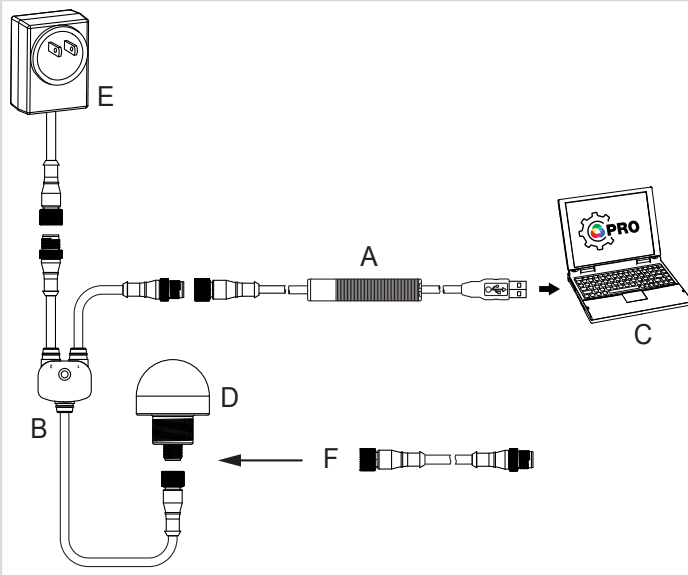

- A = Pro Converter Cable (MQDC-506-USB)
- B = Splitter (CSB-M1251FM1251M)
- C = PC running Pro Editor software
- D = Any Banner Pro Series-enabled device (K50 shown)
- E = Power Supply (PSW-24-1, PSW-24-2, or PSD-24-4)
- F = 8-Pin to 5-Pin Double-Ended Cordset (MQDC-801-5M-PRO), required for 8-Pin models

## K50 Pro Select Pro Editor Program Options

When the K50 Pro Select device is connected to Pro Editor, the software displays two application tiles for Discrete Control and Pulse Control:

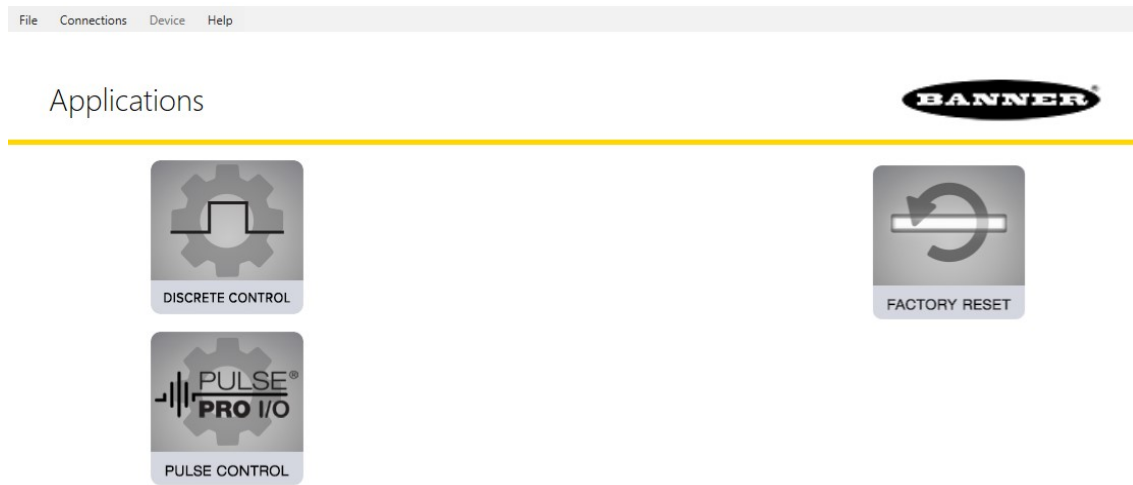


### Discrete Control

Selecting the Discrete Control tile displays three I/O State tiles:

- Basic
- Advanced
- I/O Block


Discrete Control also contains the Pro ID function, accessed through one of the three I/O State tiles.

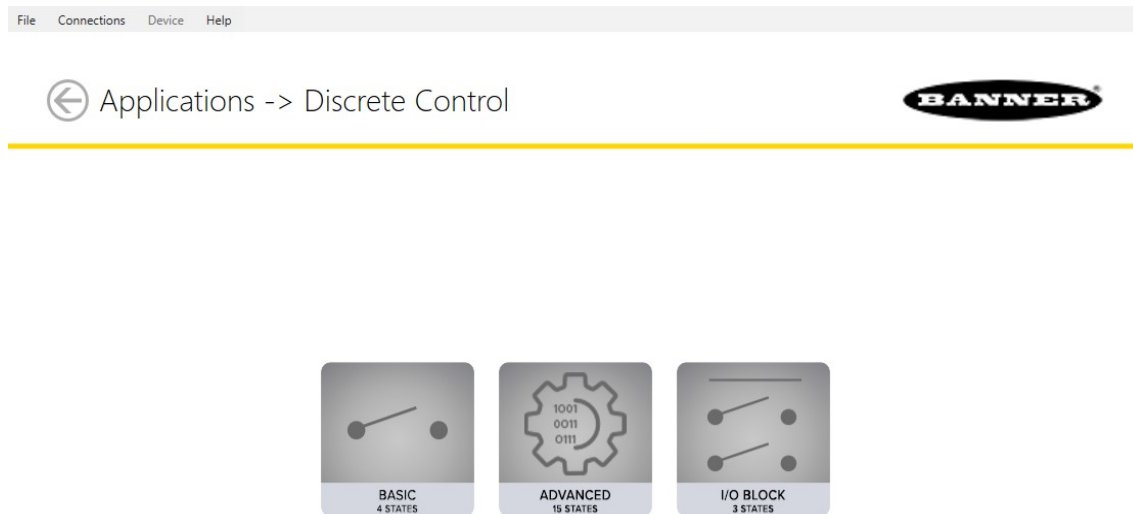

### Basic I/O State


Basic four-state control. Configurations made in Basic I/O State assign one wire to one state, with the following override control:

- Pin 1 (Brown) overrides Pin 4 (Black)
- Pin 2 (White) overrides Pins 1 and 4 (Brown and Black)
- Pin 5 (Gray) overrides Pins 1, 2, and 4 (Brown, White, and Black)

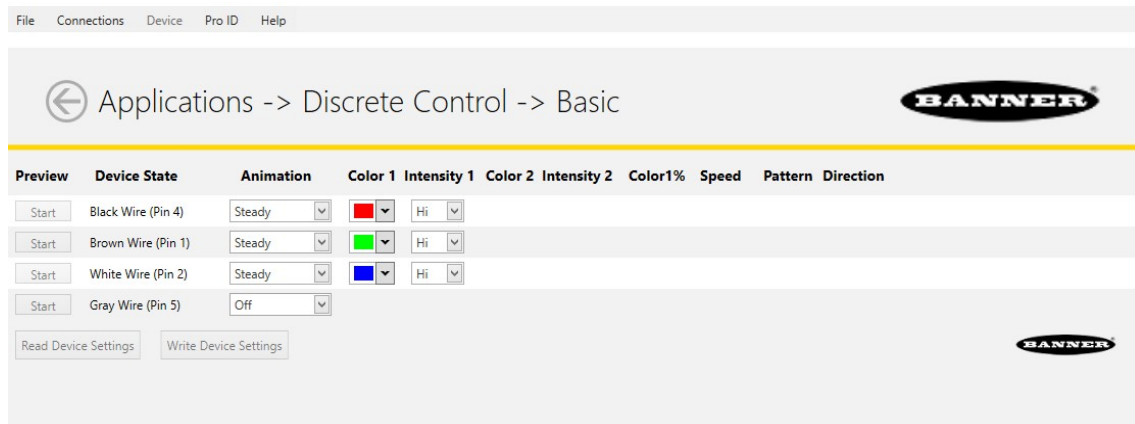


### Advanced I/O State

Advanced, default I/O state, with 15 state options for maximum configuration ability. Configurations made in Advanced I/O State assign binary wiring combinations of all valid inputs to each state.

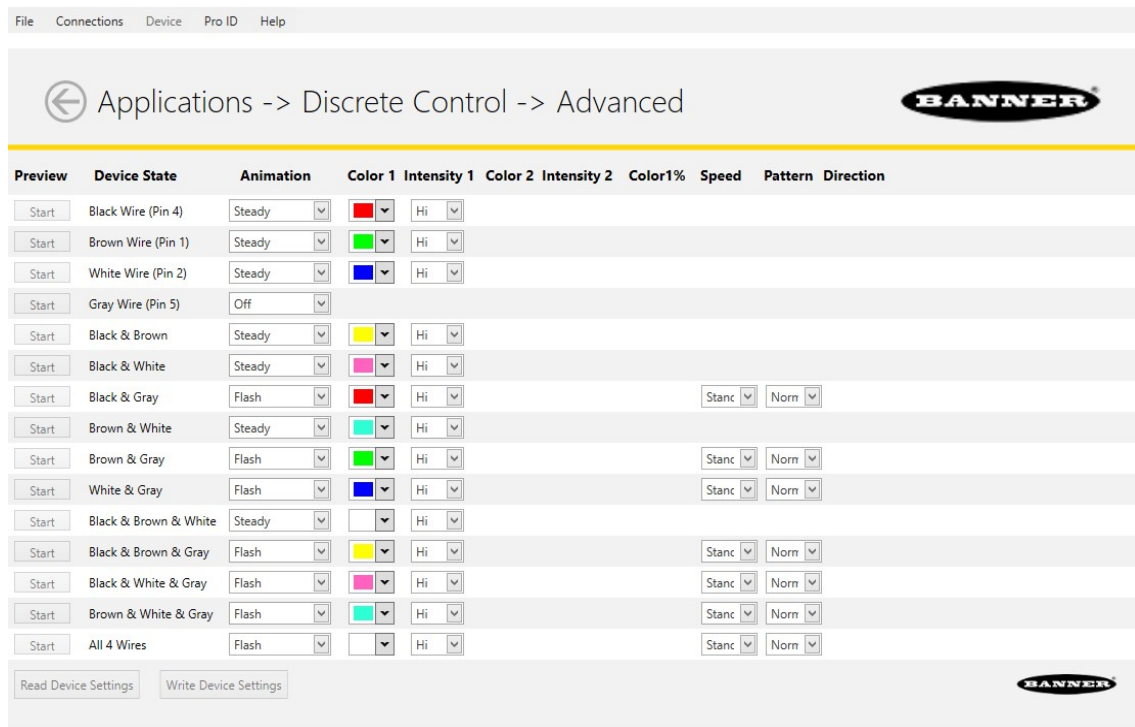

### I/O Block I/O State


Three-state control for use with I/O block. Configurations made in I/O Block assign states to the black, white, and combination of black and white wires for use with I/O blocks, for which power (brown) and common (blue) are always on for five-pin connections.

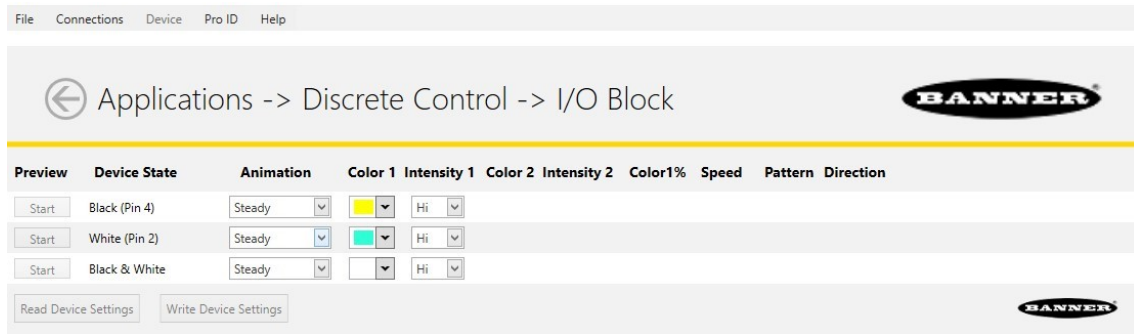

**Pro ID**


The Pro ID function allows the user to enter a known K50 model to configure a K50 Pro Select device automatically. The user must be in one of the three Discrete Control > I/O State files to access this menu.

1. In the top menu, navigate to **Pro ID > Enter Pro ID**.
2. Enter the model number of the known K50 model that you want to replicate. Do not include the input or connection type from the model number.  
For example: Model number K50LGYRPQ should be entered as K50LGYR.
3. Click **Save** to configure.

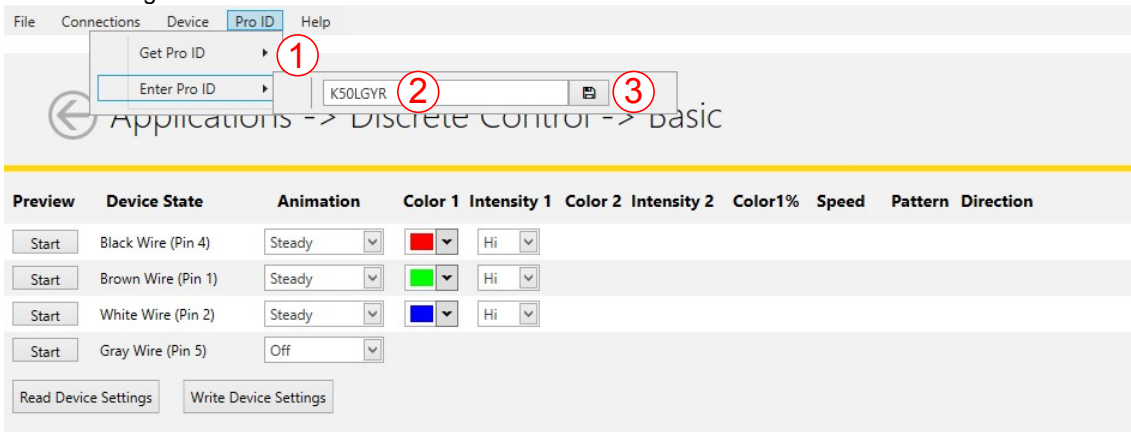

The configurations from the K50 model are applied to the settings and are highlighted in yellow (see image below).

4. Click **Write Device Settings** to write the configuration to the device.

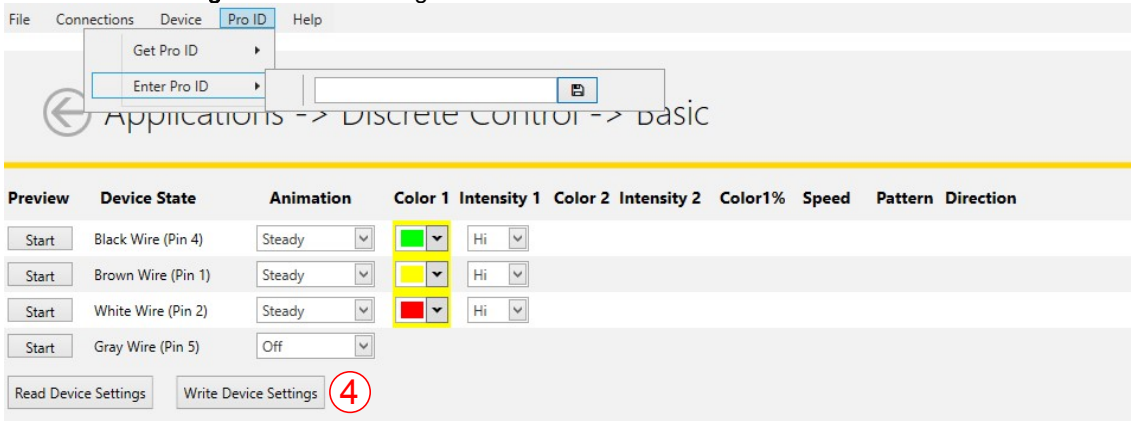


**Pulse Control**

Selecting the Pulse Control tile displays up to sixteen states that correspond to input frequencies on the white wire. The number of states (1) and input characteristics (2) are user-defined. Ranges are calculated (3).



File Connections Device Help

# Applications -> Pulse Control



Number of States: 16 PWM/PFM: PFM PFM Low: 100 PFM High: 600

Preview	State	Animation	Color 1	Intensity 1	Color 2	Intensity 2	Color1%	Speed	Pattern	Direction	Range (Hz)
Start	1	Off									100 - 131
Start	2	Steady	Red	Hi							131 - 163
Start	3	Steady	Green	Hi							163 - 194
Start	4	Steady	Yellow	Hi							194 - 225
Start	5	Steady	Blue	Hi							225 - 256
Start	6	Steady	Pink	Hi							256 - 288
Start	7	Steady	Cyan	Hi							288 - 319
Start	8	Steady	White	Hi							319 - 350
Start	9	Off									350 - 381
Start	10	Flash	Red	Hi				Stanc Norm			381 - 413
Start	11	Flash	Green	Hi				Stanc Norm			413 - 444
Start	12	Flash	Yellow	Hi				Stanc Norm			444 - 475
Start	13	Flash	Blue	Hi				Stanc Norm			475 - 506
Start	14	Flash	Pink	Hi				Stanc Norm			506 - 538
Start	15	Flash	Cyan	Hi				Stanc Norm			538 - 569
Start	16	Flash	White	Hi				Stanc Norm			569 - 600

Chapter Contents

FCC Part 15 Class B for Unintentional Radiators ..... 11  
 Industry Canada ICES-003(B)..... 11  
 Dimensions..... 12

# Chapter 4 Specifications

**Supply Voltage and Current**

- 10 V DC to 30 V DC
- 220 mA at 10 V DC
  - 190 mA at 12 V DC
  - 115 mA at 24 V DC
  - 100 mA at 30 V DC

**Supply Protection Circuitry**

Protected against reverse polarity and transient voltages

**Leakage Current Immunity**

400 µA

**Input Response Time**

250 milliseconds maximum

**Flash**

Default 1.5 Hz flash rate using flash input wire

**Vibration and Mechanical Shock**

Meets IEC 60068-2-6 requirements (Vibration: 10 Hz to 55 Hz, 1.0 mm amplitude, 5 minutes sweep, 30 minutes dwell)

Meets IEC 60068-2-27 requirements (Shock: 30G 11 ms duration, half sine wave)

**Operating Conditions**

- 40 °C to +50 °C (–40 °F to +122 °F)
- 90% at +50 °C maximum relative humidity (non-condensing)
- Storage Temperature: –40 °C to +70 °C (–40 °F to +158 °F)

**Environmental Rating**

IP66, IP67, IP69K per ISO 20653

**Connections**

Integral 5-pin M12 male quick-disconnect connector


**Mounting**

- M30 by 1.5 threaded base, maximum torque 4.5 N·m (40 inch-lbf)
- Mounting nut included

**Construction**

- Base and Dome: Polycarbonate
- Mounting Nut: Polybutylene terephthalate (PBT)

**Required Overcurrent Protection**




**WARNING:** Electrical connections must be made by qualified personnel in accordance with local and national electrical codes and regulations.


Overcurrent protection is required to be provided by end product application per the supplied table.  
 Overcurrent protection may be provided with external fusing or via Current Limiting, Class 2 Power Supply.  
 Supply wiring leads < 24 AWG shall not be spliced.  
 For additional product support, go to [www.bannerengineering.com](http://www.bannerengineering.com).

Supply Wiring (AWG)	Required Overcurrent Protection (A)	Supply Wiring (AWG)	Required Overcurrent Protection (A)
20	5.0	26	1.0
22	3.0	28	0.8
24	1.0	30	0.5

**Certifications**



Banner Engineering BV  
 Park Lane, Culliganlaan 2F bus 3  
 1831 Diegem, BELGIUM



LISTED

## Default Indicator Characteristics

Color	Dominant Wavelength (nm) or Color Temperature (CCT)	Color Coordinates <sup>(1)</sup>		Lumen Output Per Segment (Typical at 25 °C)
		X	Y	
Green	522	0.154	0.7	25.1
Red	620	0.689	0.309	13.9
Yellow	576	0.477	0.493	38.1
Blue	466	0.14	0.054	4
White	5700K	0.328	0.337	38.8
Cyan	493	0.17	0.34	27.9
Magenta	-	0.379	0.172	16.8

## FCC Part 15 Class B for Unintentional Radiators

(Part 15.105(b)) This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

(Part 15.21) Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

## Industry Canada ICES-003(B)


This device complies with CAN ICES-3 (B)/NMB-3(B). Operation is subject to the following two conditions: 1) This device may not cause harmful interference; and 2) This device must accept any interference received, including interference that may cause undesired operation.

Cet appareil est conforme à la norme NMB-3(B). Le fonctionnement est soumis aux deux conditions suivantes : (1) ce dispositif ne peut pas occasionner d'interférences, et (2) il doit tolérer toute interférence, y compris celles susceptibles de provoquer un fonctionnement non souhaité du dispositif.

<sup>(1)</sup> Refer to CIE 1931 chromaticity diagram or color chart to show equivalent color with indicated color coordinates. Actual coordinates may differ by 10%.

# Dimensions

All measurements are listed in millimeters [inches], unless noted otherwise. The measurements provided are subject to change.




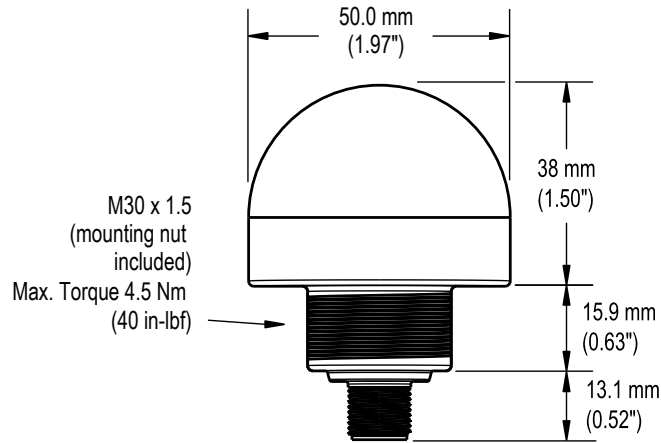


Chapter Contents

Pro Editor Hardware..... 13  
 Cordsets ..... 13  
 Brackets ..... 14  
 Wash-Down Cover ..... 16  
 Elevated Mount System ..... 16




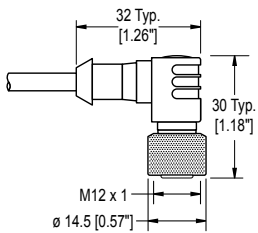
# Chapter 5 Accessories

## Pro Editor Hardware

<p><b>MQDC-506-USB</b></p> <ul style="list-style-type: none"> <li>• Pro Converter Cable</li> <li>• 1.83 m (6 ft) length 5-pin M12 quick disconnect to Device and USB to PC</li> <li>• Required for connection to the configuration software</li> </ul>	
<p><b>CSB-M1251FM1251M</b></p> <ul style="list-style-type: none"> <li>• 5-pin parallel Y splitter (Male-Male-Female)</li> <li>• For full Pro Editor preview capability</li> <li>• Requires external power supply, sold separately</li> </ul>	
<p><b>PSW-24-1</b></p> <ul style="list-style-type: none"> <li>• 24 V DC, 1 A power supply</li> <li>• 2 m (6.5 ft) PVC cable with M12 quick disconnect</li> <li>• Provides external power with splitter cable, sold separately</li> </ul>	
<p><b>PSW-24-2</b></p> <ul style="list-style-type: none"> <li>• 24 V DC, 2 A power supply</li> <li>• 3.5 m (11.5 ft) PVC cable with M12 quick disconnect</li> <li>• Provides external power with splitter cable, sold separately</li> </ul>	

## Cordsets

All measurements are listed in millimeters [inches], unless noted otherwise. The measurements provided are subject to change.

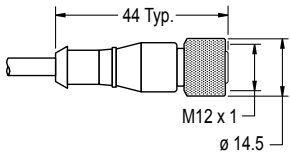
5-Pin Single-Ended M12 Female Cordsets				
Model	Length	Style	Dimensions	Pinout (Female)
MQDC1-501.5	0.5 m (1.5 ft)	Straight		 <p>1 = Brown 2 = White 3 = Blue 4 = Black 5 = Gray</p> 
MQDC1-503	0.9 m (2.9 ft)			
MQDC1-506	2 m (6.5 ft)			
MQDC1-515	5 m (16.4 ft)			
MQDC1-530	9 m (29.5 ft)			
MQDC1-560	18 m (59 ft)			
MQDC1-5100	31 m (101.7 ft)			
MQDC1-506RA	2 m (6.5 ft)	Right-Angle		
MQDC1-515RA	5 m (16.4 ft)			
MQDC1-530RA	9 m (29.5 ft)			
MQDC1-560RA	19 m (62.3 ft)			

## Brackets

### SMB30A

- Right-angle bracket with curved slot for versatile orientation
- Clearance for M6 (1/4 in) hardware
- Mounting hole for 30 mm sensor
- 12-gauge stainless steel


**Hole center spacing:** A to B=40  
**Hole size:** A=∅ 6.3, B= 27.1 × 6.3, C=∅ 30.5



### SMB30FVK

- V-clamp, flat bracket and fasteners for mounting to pipe or extensions
- Clamp accommodates 28 mm dia. tubing or 1 in. square extrusions
- 30 mm hole for mounting sensors


**Hole size:** A= ∅ 31



### SMB30RAVK

- V-clamp, right-angle bracket and fasteners for mounting sensors to pipe or extrusion
- Clamp accommodates 28 mm dia. tubing or 1 in. square extrusions
- 30 mm hole for mounting sensors


**Hole size:** A = ∅ 30.5



**SMBAMS30P**

- Flat SMBAMS series bracket
- 30 mm hole for mounting sensors
- Articulation slots for 90°+ rotation
- 12-gauge 300 series stainless steel


**Hole center spacing:** A=26.0, A to B=13.0  
**Hole size:** A=26.8 × 7.0, B=∅ 6.5, C=∅ 31.0



**SMBAMS30RA**

- Right-angle SMBAMS series bracket
- 30 mm hole for mounting sensors
- Articulation slots for 90°+ rotation
- 12-gauge (2.6 mm) cold-rolled steel


**Hole center spacing:** A=26.0, A to B=13.0  
**Hole size:** A=26.8 × 7.0, B=∅ 6.5, C=∅ 31.0



**SMB30MM**

- 12-gauge stainless steel bracket with curved mounting slots for versatile orientation
- Clearance for M6 (1/4 in) hardware
- Mounting hole for 30 mm sensor


**Hole center spacing:** A = 51, A to B = 25.4  
**Hole size:** A = 42.6 × 7, B = ∅ 6.4, C = ∅ 30.1



**SMB30SC**

- Swivel bracket with 30 mm mounting hole for sensor
- Black reinforced thermoplastic polyester
- Stainless steel mounting and swivel locking hardware included


**Hole center spacing:** A=∅ 50.8  
**Hole size:** A=∅ 7.0, B=∅ 30.0



**SMB30FA**

- Swivel bracket with tilt and pan movement for precise adjustment
- Mounting hole for 30 mm sensor
- 12-gauge 304 stainless steel
- Easy sensor mounting to extrude rail T-slot
- Metric- and inch-size bolt available


**Bolt thread:** SMB30FA, A= 3/8 - 16 × 2 in; SMB30FAM10, A= M10 - 1.5 × 50  
**Hole size:** B= ∅ 30.1



**LMBE12RA35**

- Direct mounting of stand-off pipe, with common bracket type
- Zinc-plated steel
- 1/2-14 NPSM nut
- Mounting distance from the wall to the center of the 1/2-14 NPSM nut is 35 mm

**Hole center spacing:** 20.0



<p><b>LMBE12RA45</b></p> <ul style="list-style-type: none"> <li>• Direct mounting of stand-off pipe, with common bracket type</li> <li>• Zinc-plated steel</li> <li>• 1/2-14 NPSM nut</li> <li>• Mounting distance from the wall to the center of the 1/2-14 NPSM nut is 45 mm</li> </ul> <p><b>Hole center spacing: 35.0</b></p>	
---	--

All measurements are listed in millimeters [inches], unless noted otherwise. The measurements provided are subject to change.

## Wash-Down Cover

<p><b>WC-K50 Washdown Cover</b></p> <ul style="list-style-type: none"> <li>• FDA-grade silicone</li> <li>• Fits K50 indicators</li> <li>• IP67 and IP69K rated</li> </ul>	
---	--

## Elevated Mount System

Model		Description	Components
<b>SA-M30E12P</b> - Black Acetal		<ul style="list-style-type: none"> <li>• Streamlined black acetal stand-off pipe adapter/cover</li> <li>• Connects between 30 mm light base and 1/2 in. NPSM/DN15 pipe</li> <li>• Mounting hardware included</li> </ul>	
<b>Black Anodized Aluminum</b>	<b>Clear Anodized Aluminum</b>	<ul style="list-style-type: none"> <li>• Elevated-use stand-off pipe (1/2 in. NPSM/DN15)</li> <li>• Polished 304 stainless steel, black anodized aluminum, or clear anodized aluminum surface</li> <li>• 1/2 in. NPT thread at both ends</li> <li>• Compatible with most industrial environments</li> </ul>	
<b>SOP-E12-150A</b> 150 mm (6 in) long	<b>SOP-E12-150AC</b> 150 mm (6 in) long		
<b>SOP-E12-300A</b> 300 mm (12 in) long	<b>SOP-E12-300AC</b> 300 mm (12 in) long		
<b>SOP-E12-600A</b> 600 mm (24 in) long	<b>SOP-E12-600AC</b> 600 mm (24 in) long		
<b>SOP-E12-900A</b> 900 mm (36 in) long	<b>SOP-E12-900AC</b> 900 mm (36 in) long		



Chapter Contents

# Chapter 6 **Banner Engineering Corp Limited Warranty**

---

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

**THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.**

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. **IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.**

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: [www.bannerengineering.com](http://www.bannerengineering.com).

For patent information, see [www.bannerengineering.com/patents](http://www.bannerengineering.com/patents).

 [LinkedIn](#)

 [X \(formerly Twitter\)](#)

 [Facebook](#)

