

## Datasheet

### Miniature Polarized Retroreflective Laser Sensors



- Visible Class 1 laser
- Narrow effective beam provides small-object detection and precise position control
- Crosstalk rejection algorithm protects against optical disturbance from adjacent sensors
- Excellent optical performance throughout sensing range, even close up
- 10 V dc to 30 V dc operation, with complementary (SPDT) NPN or PNP outputs, depending on model
- Bright LED operating status indicators are visible from 360°
- Compact, rugged sealed housing, protected circuitry
- Mounting versatility – popular 18 mm threaded barrel or side-mount
- Choose 2 m (6.5 ft) or 9 m (30 ft) cable or one of four QD options

Excellent for applications where high sensing power and small beam size are important. Uses a special filter to polarize the emitted light, filtering out unwanted reflections from shiny objects.



#### WARNING:

- **Do not use this device for personnel protection**
- Using this device for personnel protection could result in serious injury or death.
- This device does not include the self-checking redundant circuitry necessary to allow its use in personnel safety applications. A device failure or malfunction can cause either an energized (on) or de-energized (off) output condition.

## Models

| Models     | Sensing Range  | Spot Size at Focus                             | Cable                               | Output |
|------------|--|--|-------------------------------------|--------|
| QS18VN6LLP | 650 nm Visible Red Class 1 Laser: 0.1 to 10 m (0.33 ft to 33 ft) | Approximately 4 mm at 10 m (0.16 in. at 33 ft) | 4-wire, 2 m (6.5 ft) integral cable | NPN    |
| QS18VP6LLP |  |  |                                     | PNP    |

Standard 2 m (6.5 ft) cable models are listed. To order a 9 m (30 ft) cable model, add the suffix "W/30" to the model number (for example, QS18VN6LLP W/30).


To order QD models with a 4-pin integral Euro-style QD, add suffix "Q8" (for example, **QS18VN6LLPQ8**); to order a 4-pin Euro-style 150 mm (6 in.) pigtail QD, add suffix "Q5" (for example, **QS18VN6LLPQ5**); to order a 4-pin integral Pico-style QD, add suffix "Q7" (for example, **QS18VN6LLPQ7**); to order a 4-pin Pico-style 150 mm (6 in.) pigtail QD, add suffix "Q" (for example, **QS18VN6LLPQ**). Models with a QD connector requires a mating cable.

## Installation Notes

Conventional retroreflective photoelectric sensors are extremely easy to align. Beam angles are wide, and retro targets are forgiving to the light beam's angle of incidence. The beam of this laser sensor is very narrow, compared with the beam of most retro sensors. As the figure indicates, the effect of angular misalignment can be dramatic. Alignment is critical because the beam may miss the retroreflective target unless the target is large.

For example, with one BRT-51X51BM mounted at a distance of 6 m (20 ft) from the sensor, one degree of angular misalignment will cause the center of the laser beam to miss the center of the target by 100 mm (4 inches).

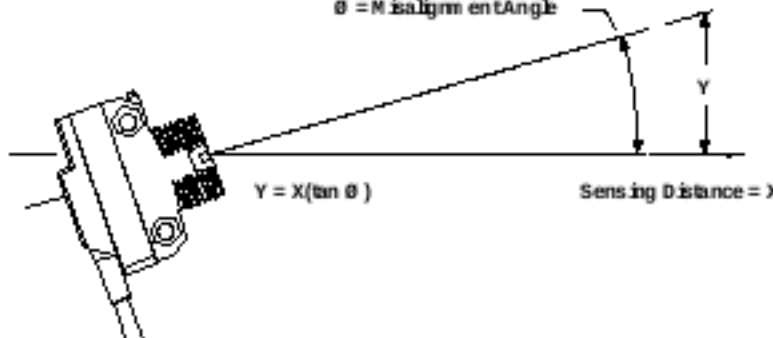

|   | Sensor-to-Target Distance (X) | Beam Displacement (Y) for 1° of Misalignment |
|---|-------------------------------|--|
| <p><i>Figure 1. Beam displacement per degree of misalignment</i></p>  <p><math>\theta = \text{Misalignment Angle}</math></p> <p><math>Y = X(\tan \theta)</math></p> <p>Sensing Distance = X</p> | 1.5 m (5 ft)                  | 25 mm (1 in)                                 |
|   | 3 m (10 ft)                   | 50 mm (2 in)                                 |
|   | 6 m (20 ft)                   | 100 mm (4 in)                                |
|   | 10 m (33 ft)                  | 150 mm (6 in)                                |

### Alignment Tip

When using a small retroreflective target at medium or long range, it is often useful to temporarily attach (or suspend) a strip of retroreflective tape (for example, BRT-THG-2) along a line that intersects the actual target. The visible red laser beam is easily seen in normal room lighting on such tape. Sight along the beam toward the target (from behind the sensor). Move the sensor to sweep the laser beam back and forth across the retro tape strip. Use the tape strip to guide the beam onto the target.

Consider using sensor mounting bracket model SMB18SF or SMB3018SC. A swivel bracket can simplify multiple-axis alignment. Alignment is complete when the visible image is centered on the retro target. The perpendicularity of the laser beam to the face of the retro target is forgiving, just as it is with a conventional retroreflective sensor.

### Effective Beam Size

Unlike conventional retroreflective sensors, the retroreflective laser has the ability to sense relatively small profiles. The table indicates the diameter of the smallest opaque rod which will reliably break the laser beam at several sensor-to-object distances. These minimum object sizes were measured with the sensor aligned to a BRT-51X51BM reflector and with the sensor set for an excess gain of about 10X. Flooding effects are possible when the gain is much higher. This means that sensor gain may have to be reduced in some situations in order to reliably detect these minimum object sizes.

Table 1: Minimum object detection size vs distance from sensor

| Distance from Sensor to Object | Minimum Object Detection Size |
|--------------------------------|-------------------------------|
| 0.3 m (1 ft)                   | 2.5 mm (0.10 in)              |
| 1.5 m (5 ft)                   | 5.0 mm (0.20 in)              |
| 3 m (10 ft)                    | 6.5 mm (0.26 in)              |
| 6 m (20 ft)                    | 10 mm (0.40 in)               |
| 10 m (33 ft)                   | 13 mm (0.52 in)               |



**CAUTION:**

- Never stare directly into the sensor lens.
- Laser light can damage your eyes.
- Avoid placing any mirror-like object in the beam. Never use a mirror as a retroreflective target.

Note that the shape of the beam is elliptical. The minimum object sizes listed assume passage of the rod across the major diameter of the ellipse (worst case). It may be possible to detect objects smaller than the sizes listed if the direction in which the objects pass through the beam can be controlled.

### Reflector Recommendations


**BRT-51X51BM** recommended for beam-block applications up to 10 m range. The reflector is included with the sensor. See [Accessories](#) on page 5 for information about ordering replacements or other reflector options.



**Note:** When sensing objects with specular reflections, use the sensor's side-mounting option to optimize sensing performance.

## Wiring Diagrams

Cabled wiring diagrams are shown. Quick disconnect wiring diagrams are functionally identical.

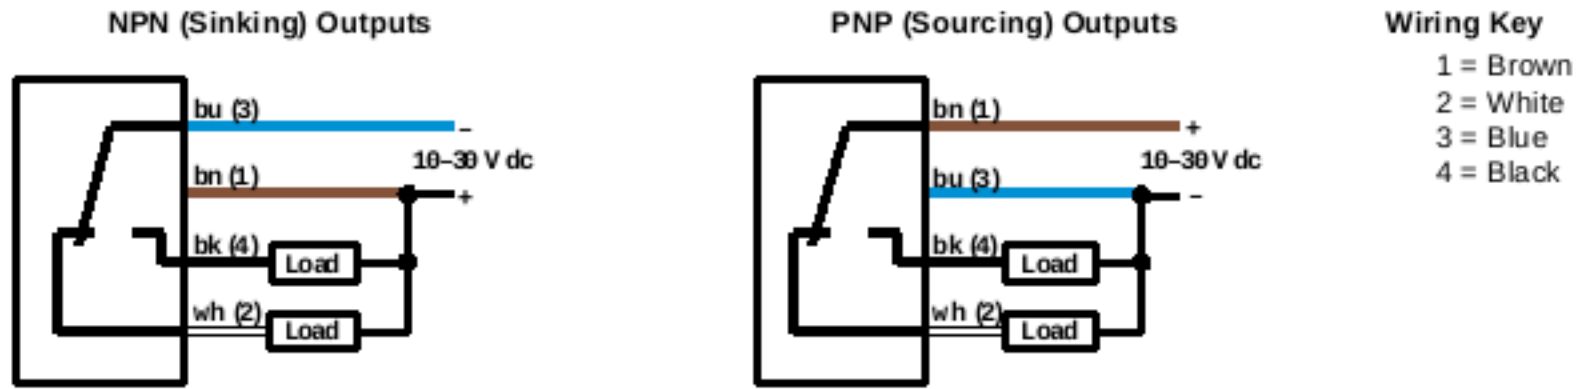

## Specifications

**Supply Voltage**

10 V DC to 30 V DC (10% maximum ripple) at less than 15 mA, exclusive of load

**Sensing Beam**

Visible red laser, 650 nm

**Laser Characteristics**

Wavelength: 650 nm visible red Class 1 laser  
 Pulse Width: 7 microseconds  
 Rep Rate: 130 microseconds  
 Average Output Power: 0.065 mW

**Supply Protection Circuitry**

Protected against reverse polarity and transient voltages

**Output Configuration**

Solid-state complementary (SPDT): NPN or PNP (current sinking or sourcing), depending on model;  
 Rating: 100 mA maximum oh output at 25 °C  
 Off-state leakage current:  
     NPN: less than 200 µA at 30 V DC (See Application Note 1)  
     PNP: less than 10 µA at 30 V DC  
 ON-state saturation voltage:  
     NPN: less than 1.6 V at 100 mA  
     PNP: less than 3.0 V at 100 mA

**Laser Classification**

Class 1 laser product; Complies with IEC 60825-1:2014 and 21 CFR 1040.10, except for deviations pursuant to Laser Notice 56, dated May 8, 2019

**Operating Conditions**

Relative Humidity: 95% at +50 °C maximum relative humidity (non-condensing)  
 Temperature: -10 °C to 50 °C (14 °F to 122 °F)

**Application Notes**

NPN off-state leakage current is < 200 µA for load resistances > 3 kΩ or optically isolated loads. For load current of 100 mA, leakage is < 1% of load current.

**Certifications**



Banner Engineering Europe  
 Park Lane, Culliganlaan 2F  
 bus 3, 1831 Degen, BELGIUM



Turck Banner LTD Blenheim  
 House, Blenheim Court,  
 Wickford, Essex SS11 8YT,  
 Great Britain



**Output Protection Circuitry**

Protected against false pulse on power-up and continuous overload or short circuit of outputs

**Output Response**

Note: 200-millisecond delay on power-up; outputs do not conduct during this time  
 700 microseconds ON/OFF

**Repeatability**

130 microseconds

**Sensing Hysteresis**

12% of range typical

**Adjustments**

Single-turn sensitivity (Gain) adjustment potentiometer

**Indicators**

2 LED indicators on sensor top:  
 Green solid: Power on  
 Amber solid: Light sensed  
 Amber flashing: Marginal excess gain (1 to 1.5x excess gain)

**Construction**

ABS housing,rylic lens cover, 3-mm mounting hardware included

**Connections**

2 m (6.5 ft) 4-wire PVC cable, 9 m (30 ft) 4-wire PVC cable, 4-pin Pico-style or Euro-style QD, 4-pin Pico-style or Euro-style 150 mm (6 in) pigtail QD, depending on model

**Required Overcurrent Protection**



**WARNING:** Electrical connections must be made by qualified personnel in accordance with local and national electrical codes and regulations.

Overcurrent protection is required to be provided by end product application per the supplied table.

Overcurrent protection may be provided with external fusing or via Current Limiting, Class 2 Power Supply.


Supply wiring leads < 24 AWG shall not be spliced.

For additional product support, go to [www.bannerengineering.com](http://www.bannerengineering.com).


| Supply Wiring (AWG) | Required Overcurrent Protection (Amps) |
|---------------------|--|
| 20                  | 5.0                                    |
| 22                  | 3.0                                    |
| 24                  | 2.0                                    |
| 26                  | 1.0                                    |
| 28                  | 0.8                                    |
| 30                  | 0.5                                    |

## Dimensions


### Cabled Models

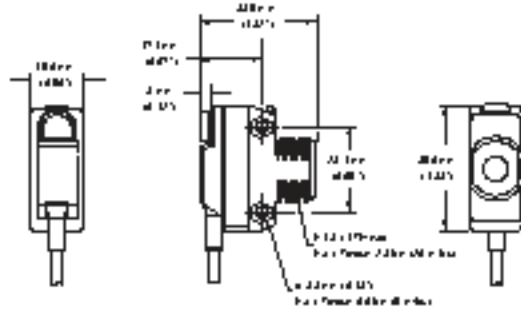


### Pico-Style QD Models

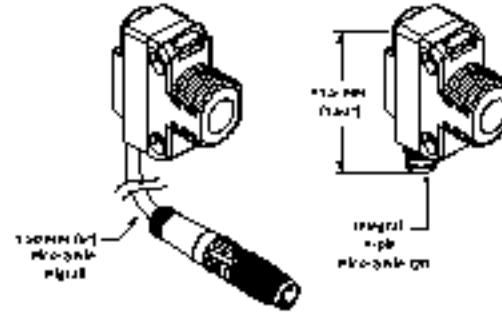


### Euro-Style QD Models

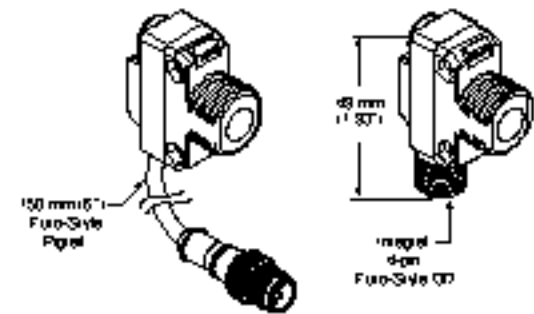

### Locknut (included with all models)

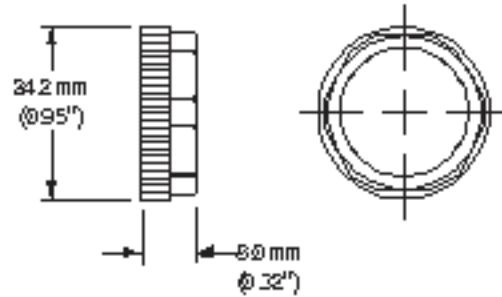

### Washer (included with all models)

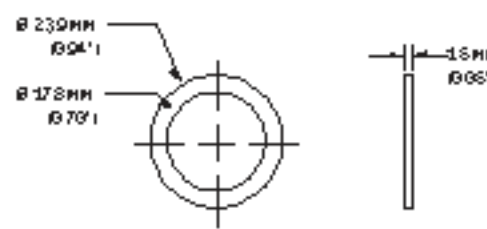

### M3 Hardware Packet Contents:

- 2 – M3 x 0.5 x 20 mm SS Screw
- 2 – M3 x 0.5 SS Hex Nut
- 2 – M3 SS Washer

## Description of Class 1 Lasers


Class 1 lasers are lasers that are safe under reasonably foreseeable conditions of operation, including the use of optical instruments for intrabeam viewing.

Reference IEC 60825-1:2014



### CAUTION:

- Return defective units to the manufacturer.
- Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.
- Do not attempt to disassemble this sensor for repair. A defective unit must be returned to the manufacturer.

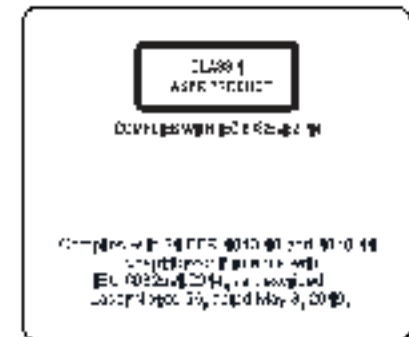

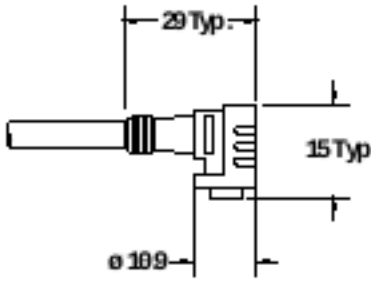







### For Safe Laser Use (Class 1 or Class 2):

- Do not stare at the laser.
- Do not point the laser at a person's eye.
- Mount open laser beam paths either above or below eye level, where practical.
- Terminate the beam emitted by the laser product at the end of its useful path.




## Accessories
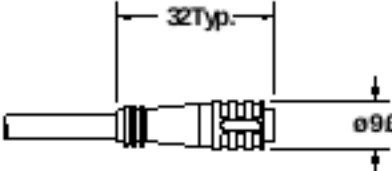
### Cordsets

| 4-Pin Snap-on M8 Cordsets—Single Ended |                  |             |   |  |   |
|--|------------------|-------------|---|--|---|
| Model                                  | Length           | Style       | Dimensions  | Pinout (Female)  |   |
| PKG4-2                                 | 2.03 m (6.66 ft) | Straight    |   |   | 1 = Brown<br>2 = White<br>3 = Blue<br>4 = Black |
| PKW4Z-2                                | 2 m (6.56 ft)    | Right-Angle |  |  |   |

| 4-Pin Threaded M12 Cordsets—Single Ended |                |             |   |   |   |
|--|----------------|-------------|---|---|---|
| Model                                    | Length         | Style       | Dimensions  | Pinout (Female)   |   |
| MQDC-406                                 | 2 m (6.56 ft)  | Straight    |   |  | 1 = Brown<br>2 = White<br>3 = Blue<br>4 = Black<br>5 = Unused |
| MQDC-415                                 | 5 m (16.4 ft)  |             |   |   |   |
| MQDC-430                                 | 9 m (29.5 ft)  |             |   |   |   |
| MQDC-450                                 | 15 m (49.2 ft) | Right-Angle |  |  |   |
| MQDC-406RA                               | 2 m (6.56 ft)  |             |   |   |   |
| MQDC-415RA                               | 5 m (16.4 ft)  |             |   |   |   |
| MQDC-430RA                               | 9 m (29.5 ft)  |             |   |   |   |
| MQDC-450RA                               | 15 m (49.2 ft) |             |   |   |   |

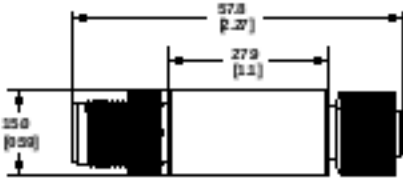
### Status Indicator

| S15L Series In-Line Sensor Status Indicator |            |                       |  |   |   |   |
|---|------------|-----------------------|--|---|---|---|
| Model                                       | Input Type | LED Color             | Dimensions   | Female  | Male  | Wiring  |
| S15LGYPQ                                    | PNP        | Power ON = Green      |  |  |  | 1 = Brown, 10 to 30 V DC<br>2 = White<br>3 = Blue, DC common<br>4 = Black, Sensor Input |
| S15LGYNQ                                    | NPN        | Input Active = Yellow |  |   |   |   |



**SMB3018SC**

- 18 mm swivel side or barrel-mount bracket
- Black reinforced thermoplastic polyester
- Stainless steel swivel locking hardware included



Hole center spacing: A = 50.8  
 Hole size: A =  $\varnothing$  7.0, B =  $\varnothing$  18.0

**Retro-reflect Targets**


Banner offers a wide selection of high-quality retroreflective targets. Go to [www.bannerengineering.com](http://www.bannerengineering.com) for complete information.



**Note:** Polarized sensors require corner cube type retroreflective targets only. Reflectivity factor when compared with the standard BRT-3 reflector.


**BRT-51X51BM**

- Square, acrylic target
- Reflectivity Factor: 1.5
- Temperature: -20 °C to +50 °C (-4 °F to +122 °F)
- Micro-prism geometry
- Optional brackets are available
- Approximate size: 51 mm x 51 mm

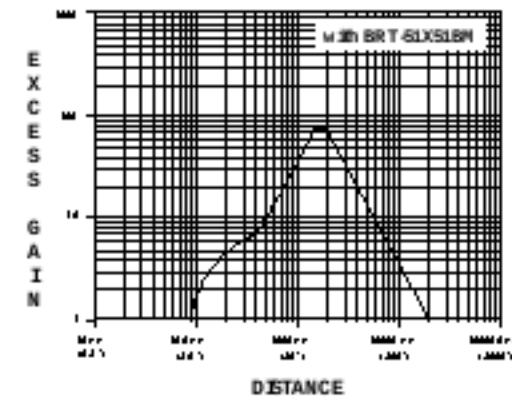

**BRT-35X35BM**

- Square, acrylic target
- Reflectivity Factor: 1.2
- Temperature: -20 °C to +60 °C (-4 °F to +140 °F)
- Micro-prism geometry
- Approximate size: 35 mm x 35 mm

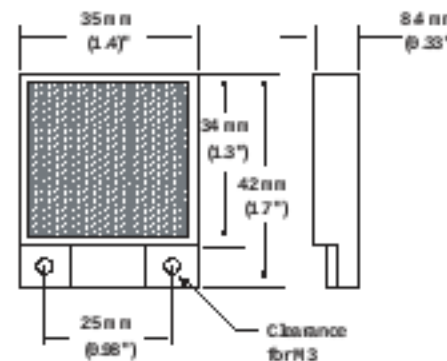

**Banner Engineering Corp. Limited Warranty**

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

**THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.**

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranty. All specifications published in this document are subject to change. Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to:

[www.banner-engineering.com](http://www.banner-engineering.com).

For general information, see [www.banner-engineering.com/ga/en/3](http://www.banner-engineering.com/ga/en/3).