

## Features



- Galvanically isolated converter that prevents noise from being induced on an RS485 communication bus by fully isolating the power and communications wires inside of the converter.
- Simple M12 connection for easy in-line installation
- Rugged overmolded design meets IP65, IP67, and IP68
- LED indicators for power in and power out

## Models

Model Number	Function Description
S25GI-RS485-Q	RS-485 Galvanic Isolator

## Overview


The S25GI-RS485-Q Galvanic Isolator is designed for applications primarily centered on optimizing and protecting RS-485 communication networks in challenging environments.

The S25GI-RS485-Q Galvanic Isolator is a fully integrated signal- and power-isolated data transceiver for RS-485 communication, and is suited for various high-speed, multipoint data transmission applications, particularly those requiring strong isolation and protection. It supports the widely used Modbus RTU industrial protocol, positioning it for use in controlling and monitoring industrial devices like PLCs, sensors, and actuators.

The primary application environment for this product series is demanding industrial applications, featuring an industrial-grade design, specifications, and certifications. Due to its robust isolation and suppression features, the S25GI-RS485-Q Galvanic Isolator is applied in locations subject to electrical noise, transients, and ground potential differences.

## Wiring


Wiring Diagram

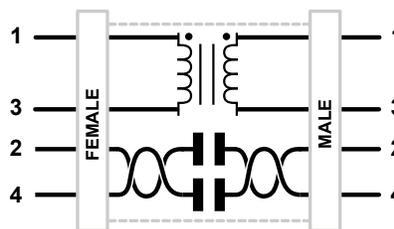

Female Pinout

Diagram	Pin Number	Wire Color	Signal Description
	Pin 1	Brown	12.6 V DC Output Power (max. 200 mA)
	Pin 2	White	Output RS-485 / D1 / B / +
	Pin 3	Blue	Ground from 12.6 V DC Output Power
	Pin 4	Black	Output RS-485 / D0 / A / -

Male Pinout

Diagram	Pin Number	Wire Color	Signal Description
	Pin 1	Brown	10 V DC to 30 V DC Input Power
	Pin 2	White	Output RS-485 / D1 / B / +
	Pin 3	Blue	Ground from 10 V DC to 30 V DC Input Power
	Pin 4	Black	Output RS-485 / D0 / A / -

## Specifications

### Supply Power Input

10 V DC to 30 V DC at 5 watts maximum

### Source Power Output

Output Voltage: 12.6 V DC

Output Current: 200 mA maximum

### Supply / Source Protection Circuitry

Supply power is protected against reverse polarity and transient voltages

Source power is protected against short circuit

External voltage applied to the source power above 12.8 V is protected to allow external supplies on the source isolated power

### Indicators

Green: Supply power in

Amber: Source power out

### Connections

Integral male/female 4-pin M12 quick-disconnect connector

### Construction

Coupling Material: Nickel-plated brass

Connector Body: PVC translucent black

### Vibration and Mechanical Shock

Meets IEC 60068-2-6 requirements (Vibration: 10 Hz to 55 Hz, 0.5 mm amplitude, 5 minutes sweep, 30 minutes dwell)

Meets IEC 60068-2-27 requirements (Shock: 15G 11 ms duration, half sine wave)

### Environmental Rating

IP65, IP67, IP68

### Operating Conditions

**Temperature:** -40 °C to +70 °C (-40 °F to +158 °F)

90% at +70 °C maximum relative humidity (non-condensing)

**Storage Temperature:** -40 °C to +80 °C (-40 °F to +176 °F)

### Product Identification



### Required Overcurrent Protection



**WARNING:** Electrical connections must be made by qualified personnel in accordance with local and national electrical codes and regulations.

Overcurrent protection is required to be provided by end product application per the supplied table.

Overcurrent protection may be provided with external fusing or via Current Limiting, Class 2 Power Supply.


Supply wiring leads < 24 AWG shall not be spliced.

For additional product support, go to [www.bannerengineering.com](http://www.bannerengineering.com).

Supply Wiring (AWG)	Required Overcurrent Protection (A)	Supply Wiring (AWG)	Required Overcurrent Protection (A)
20	5.0	26	1.0
22	3.0	28	0.8
24	2.0	30	0.5

# Dimensions

All measurements are listed in millimeters [inches], unless noted otherwise. The measurements provided are subject to change.

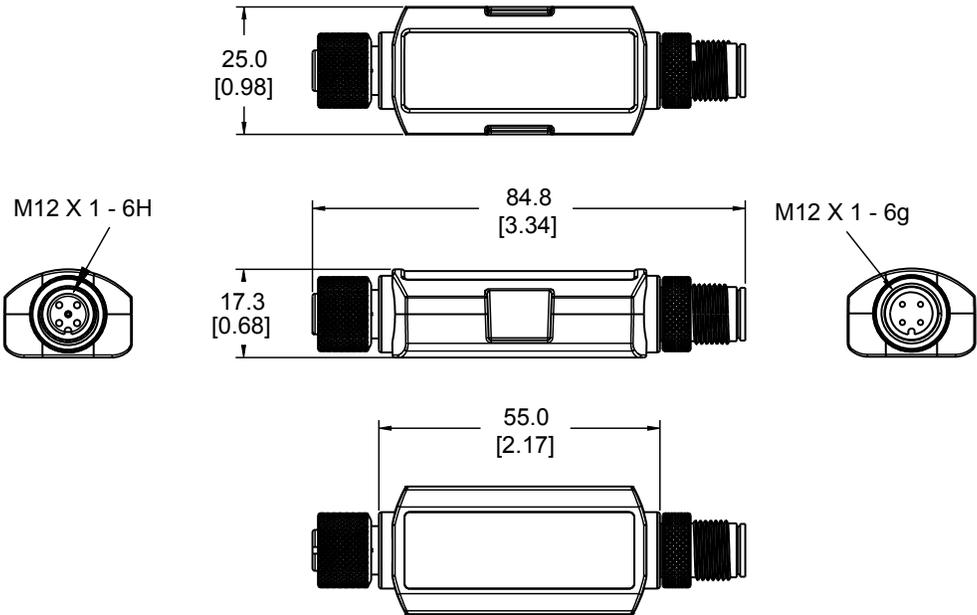

# Accessories

## Cordsets

4-pin A-Code Double-Ended M12 Female to M12 Male Cordsets (datasheet p/n 236186)				
Model	Length	Dimensions (mm)	Pinouts	
BC-M12F4-M12M4-22-1	1 m (3.28 ft)		Female 	1 = Brown 2 = White 3 = Blue 4 = Black 5 = Unused 
BC-M12F4-M12M4-22-2	2 m (6.56 ft)		Male 	
BC-M12F4-M12M4-22-3	3 m (9.84 ft)			
BC-M12F4-M12M4-22-4	4 m (13.12 ft)			
BC-M12F4-M12M4-22-5	5 m (16.4 ft)			
BC-M12F4-M12M4-22-10	10 m (30.81 ft)			
BC-M12F4-M12M4-22-15	15 m (49.2 ft)			

4-pin A-Code Double-Ended M12 Female to M12 Male Right-Angle Cordsets (datasheet p/n 236186)				
Model	Length	Dimensions (mm)	Pinouts	
BC-M12F4-M12M4A-22-1	1 m (3.28 ft)		Female 	1 = Brown 2 = White 3 = Blue 4 = Black 5 = Unused 
BC-M12F4-M12M4A-22-2	2 m (6.56 ft)		Male 	
BC-M12F4-M12M4A-22-5	5 m (16.4 ft)			
BC-M12F4-M12M4A-22-8	8 m (26.25 ft)			
BC-M12F4-M12M4A-22-10	10 m (30.81 ft)			
BC-M12F4-M12M4A-22-15	15 m (49.2 ft)			

4-pin A-Code Double-Ended M12 Female Right-Angle to M12 Male Right-Angle Cordsets (datasheet p/n 236186)				
Model	Length	Dimensions (mm)	Pinouts	
BC-M12F4A-M12M4A-22-0.3	0.3 m (1 ft)		Female 	1 = Brown 2 = White 3 = Blue 4 = Black 5 = Unused 
BC-M12F4A-M12M4A-22-1	1 m (3.28 ft)			
BC-M12F4A-M12M4A-22-2	2 m (6.56 ft)			
BC-M12F4A-M12M4A-22-5	5 m (16.4 ft)			
BC-M12F4A-M12M4A-22-8	8 m (26.25 ft)			
BC-M12F4A-M12M4A-22-10	10 m (30.81 ft)			
BC-M12F4A-M12M4A-22-15	15 m (49.2 ft)			

## Banner Engineering Corp Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

**THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.**

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. **IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.**

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: [www.bannerengineering.com](http://www.bannerengineering.com).

For patent information, see [www.bannerengineering.com/patents](http://www.bannerengineering.com/patents).