



S22 Pro Indicator with IO-Link Product Manual

Original Instructions

p/n: 253619 Rev. A

17-Dec-25

© Banner Engineering Corp. All rights reserved. www.bannerengineering.com

Contents

Chapter 1 Features	3
Models	3
Chapter 2 Wiring.....	4
Chapter 3 IO-Link Data Map	5
Process Data Out: Multicolor Mode.....	6
Process Data Out: Four State Full Logic Mode	6
Process Data Out: Advanced Mode	7
Index 0: Direct Parameters 1	8
Index 1: Direct Parameters 2	9
Index 2: Standard Command.....	10
Index 12: Device Access Locks	10
Index 16: Vendor Name	10
Index 17: Vendor Text.....	10
Index 18: Product Name.....	10
Index 19: Product ID	10
Index 20: Product Text.....	10
Index 21: Serial Number.....	11
Index 22: Hardware Version	11
Index 23: Firmware Revision	11
Index 24: Application Specific Tag	11
Index 36: Device Status.....	11
Index 37: Detailed Device Status	11
Index 80: Operation Mode	11
Index 81: Custom Animation Settings.....	12
Index 84: State Parameters 1	12
Index 85: State Parameters 2.....	14
Index 86: State Parameters 3.....	16
Index 87: State Parameters 4.....	18
Index 89: Custom Color 1 Configuration	20
Index 90: Custom Color 2 Configuration	20
Chapter 4 Specifications	21
FCC Part 15 Class B for Unintentional Radiators.....	21
Industry Canada ICES-003(B).....	22
Dimensions	22
Chapter 5 Accessories.....	23
Cordsets	23
Brackets.....	23
Chapter 6 Product Support and Maintenance	25
Animation Definitions.....	25
Clean with Mild Detergent and Warm Water	25
Repairs	25
Contact Us.....	25
Banner Engineering Corp Limited Warranty	26

Chapter Contents

Models 3

Chapter 1

Features



- IO-Link control allows access to full color, flashing, and dimming controls as well as advanced animations
- Bright, uniform indicator
- Translucent polycarbonate surface
- 22 mm threaded polycarbonate base
- Up to fourteen colors in one device (Green, Red, Yellow, Blue, White, Cyan, Magenta, Orange, Amber, Lime Green, Spring Green, Sky Blue, Violet, and Rose)
- Rugged IP67, IP69K per ISO 20653 and UL Type 4X and UL Type 13 design

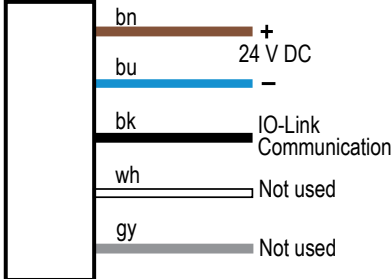

Models

Model Name	Style	Color and Input	Connector ⁽¹⁾
S22	P	K	Q
	P = Pro Indicator	K = IO-Link	Q = Integral 5-pin M12 male quick-disconnect connector

⁽¹⁾ Models with a quick-disconnect connector require a mating cordset.

Chapter 2

Wiring

Diagram	Pinout
	 1 = Brown (bn) 2 = White (wh) 3 = Blue (bu) 4 = Black (bk) 5 = Gray (gy)

Chapter Contents

Process Data Out: Multicolor Mode.....	6
Process Data Out: Four State Full Logic Mode.....	6
Process Data Out: Advanced Mode.....	7
Index 0: Direct Parameters 1.....	8
Index 1: Direct Parameters 2.....	9
Index 2: Standard Command.....	10
Index 12: Device Access Locks.....	10
Index 16: Vendor Name.....	10
Index 17: Vendor Text.....	10
Index 18: Product Name.....	10
Index 19: Product ID.....	10
Index 20: Product Text.....	10
Index 21: Serial Number.....	11
Index 22: Hardware Version.....	11
Index 23: Firmware Revision.....	11
Index 24: Application Specific Tag.....	11
Index 36: Device Status.....	11
Index 37: Detailed Device Status.....	11
Index 80: Operation Mode.....	11
Index 81: Custom Animation Settings.....	12
Index 84: State Parameters 1.....	12
Index 85: State Parameters 2.....	14
Index 86: State Parameters 3.....	16
Index 87: State Parameters 4.....	18
Index 89: Custom Color 1 Configuration.....	20
Index 90: Custom Color 2 Configuration.....	20

Chapter 3 IO-Link Data Map

S22 Pro Indicator with IO-Link

Vendor ID	451 (0x01c3)
Vendor Name	Banner Engineering Corporation
Vendor Text	More Sensors. More Solutions.
Vendor URL	www.bannerengineering.com/io-link
Device ID	393242 (0x06001a)
Device Family	S22 IOL

Features

Block Parameter	Yes
Data Storage	Yes
Supported Access Locks	Parameter: Yes Data Storage: Yes Local Parameterization: No Local User Interface: No

Communication

IO-Link Revision	V1.1
Transmission Rate	38400 bit/s (COM2)
Minimum Cycle Time	5 ms
SIO Mode Supported	No
M-Sequence Capability	PREOPERATE = TYPE_0 with 1 octet on-request data

Continued on page 6

Continued from page 5

	OPERATE = TYPE_2_V with 1 octet on-request data
	ISDU supported

Device Variant

Description	S22 Pro Indicator with IO-Link
Product ID	S22PKQ
Connection Type	5-pin M12 male
Connection Description	IO-Link quick-disconnect connector
- Pin 1	Brown: L+
- Pin 2	White: Other
- Pin 3	(light) Blue: L-
- Pin 4	Black: C/Q
- Pin 5	Gray: Not used

Process Data Out: Multicolor Mode

Use process data to activate the defined device state. Use parameter data to define output settings, control delays, color, intensity, flash, and other animation types for State 1, State 2, State 3, and State 4.

Bit Length: 48

Data Type: 48-bit record (subindex access not supported)

Subindex	Bit Offset	Data Type	Allowed Values	Default Value	Name	Description
1	40	2-bit UInteger	0 = State 1 1 = State 2 2 = State 3 3 = State 4	0	State	Animation State. Related parameters are defined in Four State Full Logic and Multicolor Parameter Data.

Process Data Out: Four State Full Logic Mode

Use process data to define the Job State and to mimic a touch button state and device state (Waiting State, Mispick State, Job State, Acknowledge State). Use parameter data to define color, intensity, flash, speed, and select animation type.

Bit Length: 48

Data Type: 48-bit record (subindex access not supported)

Subindex	Bit Offset	Data Type	Allowed Values	Default Value	Name	Description
1	40	Boolean	false = Off true = On	false	Job Input	Job Input for Four State Logic Full Logic mode.
2	41	Boolean	false = Off true = On	false	User Input (Indicator only)	User Input for Four State Full Logic mode (Indicator only).

Process Data Out: Advanced Mode

Use process data to control color, intensity, flash, and other animation types. Use parameter data to create custom colors, intensity, and speeds.

Bit Length: 48

Data Type: 48-bit record (subindex access not supported)

Subindex	Bit Offset	Data Type	Allowed Values	Default Value	Name	Description
1	40	3-bit UInteger	0 = Off 1 = Steady 2 = Flash 3 = Two Color Flash 4 = Intensity Sweep 5 = Color Sweep	0	Animation Type	The animation type.
2	43	3-bit UInteger	0 = Flash 1 = Strobe 2 = Three Pulse 3 = SOS 4 = Random	0	Animation Pattern	The pattern of the animation.
3	46	2-bit UInteger	0 = Slow 1 = Medium 2 = Fast 3 = Custom	0	Animation Speed	The speed of the animation.
4	8	5-bit UInteger	0 = Green 1 = Red 2 = Orange 3 = Amber 4 = Yellow 5 = Lime Green 6 = Spring Green 7 = Cyan 8 = Sky Blue 9 = Blue 10 = Violet 11 = Magenta 12 = Rose 13 = White 14 = Custom1 15 = Custom2	0	Color 1	The main color of the animation. Custom Colors are defined in Parameter Data.

Continued on page 8

Continued from page 7

Subindex	Bit Offset	Data Type	Allowed Values	Default Value	Name	Description
5	13	3-bit UInteger	0 = High 1 = Medium 2 = Low 3 = Off 4 = Custom	0	Color 1 Intensity	The intensity of Color 1. Custom Intensity is defined in Parameter Data.
6	0	5-bit UInteger	0 = Green 1 = Red 2 = Orange 3 = Amber 4 = Yellow 5 = Lime Green 6 = Spring Green 7 = Cyan 8 = Sky Blue 9 = Blue 10 = Violet 11 = Magenta 12 = Rose 13 = White 14 = Custom1 15 = Custom2	0	Color 2	The secondary color of the animation. Custom Colors are defined in Parameter Data.
7	5	3-bit UInteger	0 = High 1 = Medium 2 = Low 3 = Off 4 = Custom	0	Color 2 Intensity	The intensity of Color 2. Custom Intensity is defined in Parameter Data.

Index 0: Direct Parameters 1

Data Type: 128-bit Record

Access Rights: RW

Subindex	Bit Offset	Data Type	Allowed Values	Default Value	Acc. Restr.	Name	Description
1	120	8-bit UInteger		0	RO	Reserved	
2	112	8-bit UInteger		0	RO	Master Cycle Time	
3	104	8-bit UInteger		0	RO	Min Cycle Time	
4	96	8-bit UInteger		0	RO	M-Sequence Capability	
5	88	8-bit UInteger		17	RO	IO-Link Version ID	
6	80	8-bit UInteger		0	RO	Process Data Input Length	
7	72	8-bit UInteger		0	RO	Process Data Output Length	

Continued on page 9

Continued from page 8

Subindex	Bit Offset	Data Type	Allowed Values	Default Value	Acc. Restr.	Name	Description
8	64	8-bit UInteger		0	RO	Vendor ID 1	
9	56	8-bit UInteger		0	RO	Vendor ID 2	
10	48	8-bit UInteger		0	RO	Device ID 1	
11	40	8-bit UInteger		0	RO	Device ID 2	
12	32	8-bit UInteger		0	RO	Device ID 3	
13	24	8-bit UInteger		0	RO	Reserved	
14	16	8-bit UInteger		0	RO	Reserved	
15	8	8-bit UInteger		0	RO	Reserved	
16	0	8-bit UInteger	130 = Restore Factory Settings	0	WO	Standard Command	

Index 1: Direct Parameters 2

Data Type: 128-bit Record

Access Rights: RW

Subindex	Bit Offset	Data Type	Allowed Values	Default Value	Acc. Restr.	Name	Description
1	120	8-bit UInteger		0		Device Specific Parameter 1	
2	112	8-bit UInteger		0		Device Specific Parameter 2	
3	104	8-bit UInteger		0		Device Specific Parameter 3	
4	96	8-bit UInteger		0		Device Specific Parameter 4	
5	88	8-bit UInteger		0		Device Specific Parameter 5	
6	80	8-bit UInteger		0		Device Specific Parameter 6	
7	72	8-bit UInteger		0		Device Specific Parameter 7	
8	64	8-bit UInteger		0		Device Specific Parameter 8	
9	56	8-bit UInteger		0		Device Specific Parameter 9	
10	48	8-bit UInteger		0		Device Specific Parameter 10	
11	40	8-bit UInteger		0		Device Specific Parameter 11	
12	32	8-bit UInteger		0		Device Specific Parameter 12	
13	24	8-bit UInteger		0		Device Specific Parameter 13	
14	16	8-bit UInteger		0		Device Specific Parameter 14	
15	8	8-bit UInteger		0		Device Specific Parameter 15	
16	0	8-bit UInteger		0		Device Specific Parameter 16	

Index 2: Standard Command

Data Type: 8-bit UInteger

Allowed Values: 130 = Restore Factory Settings

Access Rights: WO

Modifies other variables.

Index 12: Device Access Locks

Data Type: 16-bit Record (subindex access not supported)

Access Rights: RW

Subindex	Bit Offset	Data Type	Allowed Values	Default Value	Acc. Restr.	Name	Description
1	0	Boolean		FALSE		Parameter (write) Access Lock	
2	1	Boolean		FALSE		Data Storage Lock	
3	2	Boolean				Local Parameterization Lock	
4	3	Boolean				Local User Interface Lock	

Index 16: Vendor Name

Data Type: 30-octet String UTF-8

Default Value: "Banner Engineering Corporation"

Access Rights: RO

Index 17: Vendor Text

Data Type: 29-octet String UTF-8

Default Value: "More Sensors. More Solutions."

Access Rights: RO

Index 18: Product Name

Data Type: 32-octet String UTF-8

Access Rights: RO

Index 19: Product ID

Data Type: 32-octet String UTF-8

Access Rights: RO

Index 20: Product Text

Data Type: 32-octet String UTF-8

Default Value: "S22 Pro Indicator with IOL"

Access Rights: RO

Index 21: Serial Number

Data Type: 16-octet String UTF-8

Access Rights: RO

Index 22: Hardware Version

Data Type: 64-octet String UTF-8

Access Rights: RO

Index 23: Firmware Revision

Data Type: 16-octet String UTF-8

Access Rights: RO

Index 24: Application Specific Tag

Data Type: 32-octet String UTF-8

Access Rights: RW

Index 36: Device Status

Data Type: 8-bit UInteger

Allowed Values:

- 0 = Device is OK
- 1 = Maintenance required
- 2 = Out of specification
- 3 = Functional check
- 4 = Failure
- 5..255 = Reserved

Access Rights: RO

Dynamic

Index 37: Detailed Device Status

Data Type: Array[6] of 3-octet OctetString (subindex access not supported)

Access Rights: RO

Dynamic

Index 80: Operation Mode

Description: Operation Mode

Data Type: 3-bit UInteger

Allowed Values:

- 0 = Multicolor
- 1 = Four State Logic Full Logic
- 2 = Advanced
- 3 = Demo (Cycles through color spectrum, two color sweep, and intensity sweep mode.)

Default Value: 2

Access Rights: RW

Index 81: Custom Animation Settings

Description: Settings

Data Type: 24-bit Record (subindex access not supported)

Access Rights: RW

Subindex	Bit Offset	Data Type	Allowed Values	Default Value	Acc. Restr.	Name	Description
1	0	8-bit UInteger	0..100	100		Custom Intensity (0 - 100%)	Configure the desired custom intensity.
2	8	8-bit UInteger	5..255	15		Custom Flash Rate (0.5 - 25.5 Hz)	Configure the desired custom flash rate.
3	16	8-bit UInteger	0 = Off 1 = On	0		Restrict To Gamut	Turn on to show more consistent colors from device to device.

Index 84: State Parameters 1

Description: State 1 Parameters

Data Type: 48-bit Record

Access Rights: RW

Subindex	Bit Offset	Data Type	Allowed Values	Default Value	Acc. Restr.	Name	Description
1	0	3-bit UInteger	0 = Off 1 = Steady 2 = Flash 3 = Two Color Flash 4 = Intensity Sweep 5 = Color Sweep	1		Animation Type	The animation type.
2	3	3-bit UInteger	0 = Flash 1 = Strobe 2 = Three Pulse 3 = SOS 4 = Random	0		Animation Pattern	The pattern of the animation.
3	6	2-bit UInteger	0 = Slow 1 = Medium 2 = Fast 3 = Custom	1		Animation Speed	The speed of the animation.
4	8	Boolean	false = Leading Edge true = Trailing Edge	FALSE		Off Delay Type	A leading edge delay is triggered on the rising edge of a user/touch input. A trailing edge delay is triggered on the falling edge of a user/touch input.

Continued on page 13

Continued from page 12

Subindex	Bit Offset	Data Type	Allowed Values	Default Value	Acc. Restr.	Name	Description
5	16	16-bit UInteger	0..65535	0		Off Delay (ms)	The length of time before the device returns to the inactive state after user/touch input is released.
6	32	5-bit UInteger	0 = Green 1 = Red 2 = Orange 3 = Amber 4 = Yellow 5 = Lime Green 6 = Spring Green 7 = Cyan 8 = Sky Blue 9 = Blue 10 = Violet 11 = Magenta 12 = Rose 13 = White 14 = Custom1 15 = Custom2	0		Color 1	The main color of the animation. Custom Colors are defined in Parameter Data.
7	37	3-bit UInteger	0 = High 1 = Medium 2 = Low 3 = Off 4 = Custom	0		Color 1 Intensity	The intensity of Color 1. Custom Intensity is defined in Parameter Data.
8	40	5-bit UInteger	0 = Green 1 = Red 2 = Orange 3 = Amber 4 = Yellow 5 = Lime Green 6 = Spring Green 7 = Cyan 8 = Sky Blue 9 = Blue 10 = Violet 11 = Magenta 12 = Rose 13 = White 14 = Custom1 15 = Custom2	0		Color 2	The secondary color of the animation. Custom Colors are defined in Parameter Data.

Continued on page 14

Continued from page 13

Subindex	Bit Offset	Data Type	Allowed Values	Default Value	Acc. Restr.	Name	Description
9	45	3-bit UInteger	0 = High 1 = Medium 2 = Low 3 = Off 4 = Custom	0		Color 2 Intensity	The intensity of Color 2. Custom Intensity is defined in Parameter Data.

Index 85: State Parameters 2

Description: State 2 Parameters

Data Type: 48-bit Record

Access Rights: RW

Subindex	Bit Offset	Data Type	Allowed Values	Default Value	Acc. Restr.	Name	Description
1	0	3-bit UInteger	0 = Off 1 = Steady 2 = Flash 3 = Two Color Flash 4 = Intensity Sweep 5 = Color Sweep	1		Animation Type	The animation type.
2	3	3-bit UInteger	0 = Flash 1 = Strobe 2 = Three Pulse 3 = SOS 4 = Random	0		Animation Pattern	The pattern of the animation.
3	6	2-bit UInteger	0 = Slow 1 = Medium 2 = Fast 3 = Custom	1		Animation Speed	The speed of the animation.
4	8	Boolean	false = Leading Edge true = Trailing Edge	FALSE		Off Delay Type	A leading edge delay is triggered on the rising edge of a user/touch input. A trailing edge delay is triggered on the falling edge of a user/touch input.
5	16	16-bit UInteger	0..65535	0		Off Delay (ms)	The length of time before the device returns to the inactive state after user/touch input is released.

Continued on page 15

Continued from page 14

Subindex	Bit Offset	Data Type	Allowed Values	Default Value	Acc. Restr.	Name	Description
6	32	5-bit UInteger	0 = Green 1 = Red 2 = Orange 3 = Amber 4 = Yellow 5 = Lime Green 6 = Spring Green 7 = Cyan 8 = Sky Blue 9 = Blue 10 = Violet 11 = Magenta 12 = Rose 13 = White 14 = Custom1 15 = Custom2	0		Color 1	The main color of the animation. Custom Colors are defined in Parameter Data.
7	37	3-bit UInteger	0 = High 1 = Medium 2 = Low 3 = Off 4 = Custom	0		Color 1 Intensity	The intensity of Color 1. Custom Intensity is defined in Parameter Data.
8	40	5-bit UInteger	0 = Green 1 = Red 2 = Orange 3 = Amber 4 = Yellow 5 = Lime Green 6 = Spring Green 7 = Cyan 8 = Sky Blue 9 = Blue 10 = Violet 11 = Magenta 12 = Rose 13 = White 14 = Custom1 15 = Custom2	0		Color 2	The secondary color of the animation. Custom Colors are defined in Parameter Data.

Continued on page 16

Continued from page 15

Subindex	Bit Offset	Data Type	Allowed Values	Default Value	Acc. Restr.	Name	Description
9	45	3-bit UInteger	0 = High 1 = Medium 2 = Low 3 = Off 4 = Custom	0		Color 2 Intensity	The intensity of Color 2. Custom Intensity is defined in Parameter Data.

Index 86: State Parameters 3

Description: State 3 Parameters

Data Type: 48-bit Record

Access Rights: RW

Subindex	Bit Offset	Data Type	Allowed Values	Default Value	Acc. Restr.	Name	Description
1	0	3-bit UInteger	0 = Off 1 = Steady 2 = Flash 3 = Two Color Flash 4 = Intensity Sweep 5 = Color Sweep	1		Animation Type	The animation type.
2	3	3-bit UInteger	0 = Flash 1 = Strobe 2 = Three Pulse 3 = SOS 4 = Random	0		Animation Pattern	The pattern of the animation.
3	6	2-bit UInteger	0 = Slow 1 = Medium 2 = Fast 3 = Custom	1		Animation Speed	The speed of the animation.
4	8	Boolean	false = Leading Edge true = Trailing Edge	FALSE		Off Delay Type	A leading edge delay is triggered on the rising edge of a user/touch input. A trailing edge delay is triggered on the falling edge of a user/touch input.
5	16	16-bit UInteger	0..65535	0		Off Delay (ms)	The length of time before the device returns to the inactive state after user/touch input is released.

Continued on page 17

Continued from page 16

Subindex	Bit Offset	Data Type	Allowed Values	Default Value	Acc. Restr.	Name	Description
6	32	5-bit UInteger	0 = Green 1 = Red 2 = Orange 3 = Amber 4 = Yellow 5 = Lime Green 6 = Spring Green 7 = Cyan 8 = Sky Blue 9 = Blue 10 = Violet 11 = Magenta 12 = Rose 13 = White 14 = Custom1 15 = Custom2	0		Color 1	The main color of the animation. Custom Colors are defined in Parameter Data.
7	37	3-bit UInteger	0 = High 1 = Medium 2 = Low 3 = Off 4 = Custom	0		Color 1 Intensity	The intensity of Color 1. Custom Intensity is defined in Parameter Data.
8	40	5-bit UInteger	0 = Green 1 = Red 2 = Orange 3 = Amber 4 = Yellow 5 = Lime Green 6 = Spring Green 7 = Cyan 8 = Sky Blue 9 = Blue 10 = Violet 11 = Magenta 12 = Rose 13 = White 14 = Custom1 15 = Custom2	0		Color 2	The secondary color of the animation. Custom Colors are defined in Parameter Data.

Continued on page 18

Continued from page 17

Subindex	Bit Offset	Data Type	Allowed Values	Default Value	Acc. Restr.	Name	Description
9	45	3-bit UInteger	0 = High 1 = Medium 2 = Low 3 = Off 4 = Custom	0		Color 2 Intensity	The intensity of Color 2. Custom Intensity is defined in Parameter Data.

Index 87: State Parameters 4

Description: State 4 Parameters

Data Type: 48-bit Record

Access Rights: RW

Subindex	Bit Offset	Data Type	Allowed Values	Default Value	Acc. Restr.	Name	Description
1	0	3-bit UInteger	0 = Off 1 = Steady 2 = Flash 3 = Two Color Flash 4 = Intensity Sweep 5 = Color Sweep	1		Animation Type	The animation type.
2	3	3-bit UInteger	0 = Flash 1 = Strobe 2 = Three Pulse 3 = SOS 4 = Random	0		Animation Pattern	The pattern of the animation.
3	6	2-bit UInteger	0 = Slow 1 = Medium 2 = Fast 3 = Custom	1		Animation Speed	The speed of the animation.
4	8	Boolean	false = Leading Edge true = Trailing Edge	FALSE		Off Delay Type	A leading edge delay is triggered on the rising edge of a user/touch input. A trailing edge delay is triggered on the falling edge of a user/touch input.
5	16	16-bit UInteger	0..65535	0		Off Delay (ms)	The length of time before the device returns to the inactive state after user/touch input is released.

Continued on page 19

Continued from page 18

Subindex	Bit Offset	Data Type	Allowed Values	Default Value	Acc. Restr.	Name	Description
6	32	5-bit UInteger	0 = Green 1 = Red 2 = Orange 3 = Amber 4 = Yellow 5 = Lime Green 6 = Spring Green 7 = Cyan 8 = Sky Blue 9 = Blue 10 = Violet 11 = Magenta 12 = Rose 13 = White 14 = Custom1 15 = Custom2	0		Color 1	The main color of the animation. Custom Colors are defined in Parameter Data.
7	37	3-bit UInteger	0 = High 1 = Medium 2 = Low 3 = Off 4 = Custom	0		Color 1 Intensity	The intensity of Color 1. Custom Intensity is defined in Parameter Data.
8	40	5-bit UInteger	0 = Green 1 = Red 2 = Orange 3 = Amber 4 = Yellow 5 = Lime Green 6 = Spring Green 7 = Cyan 8 = Sky Blue 9 = Blue 10 = Violet 11 = Magenta 12 = Rose 13 = White 14 = Custom1 15 = Custom2	0		Color 2	The secondary color of the animation. Custom Colors are defined in Parameter Data.

Continued on page 20

Continued from page 19

Subindex	Bit Offset	Data Type	Allowed Values	Default Value	Acc. Restr.	Name	Description
9	45	3-bit UInteger	0 = High 1 = Medium 2 = Low 3 = Off 4 = Custom	0		Color 2 Intensity	The intensity of Color 2. Custom Intensity is defined in Parameter Data.

Index 89: Custom Color 1 Configuration

Description: Custom Color 1

Data Type: 24-bit Record (subindex access not supported)

Access Rights: RW

Subindex	Bit Offset	Data Type	Allowed Values	Default Value	Acc. Restr.	Name	Description
1	0	8-bit UInteger	0..255	255		Red	The red value for Custom Color 1.
2	8	8-bit UInteger	0..255	255		Green	The green value for Custom Color 1.
3	16	8-bit UInteger	0..255	255		Blue	The blue value for Custom Color 1.

Index 90: Custom Color 2 Configuration

Description: Custom Color 2

Data Type: 24-bit Record (subindex access not supported)

Access Rights: RW

Subindex	Bit Offset	Data Type	Allowed Values	Default Value	Acc. Restr.	Name	Description
1	0	8-bit UInteger	0..255	255		Red	The red value for Custom Color 1.
2	8	8-bit UInteger	0..255	255		Green	The green value for Custom Color 1.
3	16	8-bit UInteger	0..255	255		Blue	The blue value for Custom Color 1.

Chapter Contents

FCC Part 15 Class B for Unintentional Radiators	21
Industry Canada ICES-003(B).....	22
Dimensions.....	22

Chapter 4 Specifications

Supply Voltage

18 V DC to 30 V DC

Supply Current

25 mA maximum current at 18 V DC

20 mA maximum current at 24 V DC

20 mA maximum current at 30 V DC

Supply Protection Circuitry

Protected against reverse polarity and transient voltages

Connections

Integral 5-pin M12 male quick-disconnect connector

Models with a quick-disconnect connector require a mating cordset

Mounting

M22 by 1.5 threaded base, maximum torque 2.25 N·m (20 inch·lbf)

Mounting nut included

Default Indicator Characteristics

Color	Dominant Wavelength (nm) or Color Temperature (CCT)	Color Coordinates ⁽²⁾		Lumen Output (Typical at 25 °C)
		x	y	
Green	527	0.178	0.7	1.9
Red	625	0.699	0.298	0.8
Yellow	571	0.424	0.511	2.5
Blue	465	0.139	0.052	0.3
White	5700K	0.328	0.337	2.5
Cyan	492	0.158	0.34	2
Magenta	–	0.345	0.161	1.2
Amber	585	0.517	0.438	1.8
Rose	–	0.491	0.215	0.9
Lime Green	557	0.347	0.571	2.2
Sky Blue	485	0.151	0.248	1.9
Orange	596	0.585	0.386	1.4
Violet	435	0.204	0.082	0.5
Spring Green	507	0.169	0.524	1.9

⁽²⁾ Refer to the CIE 1930 (x,y) Chromaticity Diagram, to show equivalent color with indicated color coordinates.

Construction

Base, Dome, and Nut: Polycarbonate

Vibration and Mechanical Shock

Meets IEC 60068-2-6 requirements (Vibration: 10 Hz to 55 Hz, 1.0 mm amplitude, 5 minutes sweep, 30 minutes dwell)

Meets IEC 60068-2-27 requirements (Shock: 30G 11 ms duration, half sine wave)

Operating Conditions

–40 °C to +50 °C (–40 °F to +122 °F)

90% at +50 °C maximum relative humidity (non-condensing)

Storage Temperature: –40 °C to +70 °C (–40 °F to +158 °F)

Environmental Rating

IP67, IP69K per ISO 20653

Certifications



Banner Engineering BV
Park Lane, Culliganlaan 2F bus 3
1831 Diegem, BELGIUM



Required Overcurrent Protection



WARNING: Electrical connections must be made by qualified personnel in accordance with local and national electrical codes and regulations.

Overcurrent protection is required to be provided by end product application per the supplied table.

Overcurrent protection may be provided with external fusing or via Current Limiting, Class 2 Power Supply.

Supply wiring leads < 24 AWG shall not be spliced.

For additional product support, go to www.bannerengineering.com.

Supply Wiring (AWG)	Required Overcurrent Protection (A)	Supply Wiring (AWG)	Required Overcurrent Protection (A)
20	5.0	26	1.0
22	3.0	28	0.8
24	2.0	30	0.5

FCC Part 15 Class B for Unintentional Radiators

(Part 15.105(b)) This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

(Part 15.21) Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

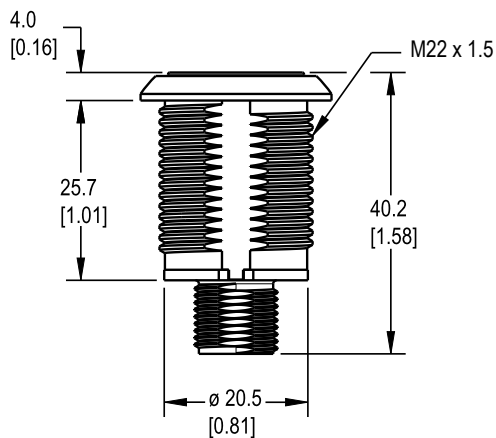
Industry Canada ICES-003(B)

This device complies with CAN ICES-3 (B)/NMB-3(B). Operation is subject to the following two conditions: 1) This device may not cause harmful interference; and 2) This device must accept any interference received, including interference that may cause undesired operation.

Cet appareil est conforme à la norme NMB-3(B). Le fonctionnement est soumis aux deux conditions suivantes : (1) ce dispositif ne peut pas occasionner d'interférences, et (2) il doit tolérer toute interférence, y compris celles susceptibles de provoquer un fonctionnement non souhaité du dispositif.

Dimensions

All measurements are listed in millimeters [inches], unless noted otherwise. The measurements provided are subject to change.



Chapter Contents	
Cordsets	23
Brackets	23

Chapter 5 Accessories

Cordsets

5-pin A-Code Double-Ended M12 Female to M12 Male Cordsets (datasheet p/n 236183)				
Model	Length	Dimensions (mm)	Pinouts	
BC-M12F5-M12M5-22-1	1 m (3.28 ft)		Female Male	1 = Brown 2 = White 3 = Blue 4 = Black 5 = Gray
BC-M12F5-M12M5-22-2	2 m (6.56 ft)			
BC-M12F5-M12M5-22-5	5 m (16.4 ft)			
BC-M12F5-M12M5-22-8	8 m (26.25 ft)			
BC-M12F5-M12M5-22-10	10 m (30.81 ft)			
BC-M12F5-M12M5-22-15	15 m (49.2 ft)			

Brackets

All measurements are listed in millimeters, unless noted otherwise. The measurements provided are subject to change.


SMB22A - Right-angle bracket with curved slot for versatile orientation 12-ga. stainless steel - Mounting hole for 22 mm sensor - CAD Files: DXF, PDF, IGS, STP Hole center spacing: A to B = 26.0 Hole size: A = $\varnothing$ 4.6, B = 4.6 x 16.9, C = 22.2	
SMB22FVK - V-clamp, flat bracket and fasteners for mounting to pipe or extensions - Clamp accommodates 28 mm diameter tubing or 1 in. square extrusions 22 mm hole for mounting sensor - CAD Files: DXF, PDF, IGS, STP Hole size: A = $\varnothing$ 22.5	
SMB22RAVK - V-clamp, right-angle bracket and fasteners for mounting to pipe or extensions - Clamp accommodates 28 mm diameter tubing or 1 in. square extrusions 22 mm hole for mounting sensor - CAD Files: DXF, PDF, IGS, STP Hole size: A = $\varnothing$ 22.5	

SMBAMS22P

- Flat SMBAMS series bracket with 22 mm hole for mounting sensors
- Articulation slots for 90+° rotation
- 12-ga. (2.6 mm) cold-rolled steel
- CAD Files: [DXF](#), [PDF](#), [IGS](#), [STP](#)

Hole center spacing: A = 26.0, A to B = 13.0


Hole size: A = 26.8 x 7.0, B = ø 6.5, C = ø 22.5

**SMBAMS22RA**

- Right-angle SMBAMS series bracket with 22 mm hole for mounting sensors
- Articulation slots for 90+° rotation
- 12-ga. (2.6 mm) cold-rolled steel
- CAD Files: [DXF](#), [PDF](#), [IGS](#), [STP](#)

Hole center spacing: A = 26.0, A to B = 13.0

Hole size: A = 26.8 x 7.0, B = ø 6.5, C = ø 22.5



Chapter Contents

Animation Definitions.....	25
Clean with Mild Detergent and Warm Water	25
Repairs	25
Contact Us.....	25
Banner Engineering Corp Limited Warranty.....	26

Chapter 6 Product Support and Maintenance

Animation Definitions

The following table describes the definitions for device states.

Name	Description
Animation Type:	
Off	Indicator is off
Steady	Color 1 is solid on at defined intensity
Flash	Color 1 flashes at defined speed, color intensity, and pattern
Two Color Flash	Color 1 and Color 2 flash alternately at defined speed, color intensities, and pattern
Intensity Sweep	Color 1 repeatedly increases and decreases intensity between 0% to 100% at defined speed and color intensity
Color Sweep	Color 1 and Color 2 transition alternately at defined speed and color intensities
Animation Pattern	Defines the flash pattern for flash and two color flash animations (normal, strobe, three pulse, SOS, or random)
Animation Speed	Defines the animation speed (slow, medium, fast, or custom)
Color 1	Defines Color 1 of defined animation
Color 1 Intensity	Defines the intensity of Color 1 in the animation (high, medium, low, off, or custom)
Color 2	Defines Color 2 of defined animation
Color 2 Intensity	Defines the intensity of Color 2 in the animation (high, medium, low, off, or custom)

Clean with Mild Detergent and Warm Water

Wipe down the device with a soft cloth dampened with a mild detergent and warm water solution. Do not use any other chemicals for cleaning.

Repairs

Contact Banner Engineering for troubleshooting of this device. **Do not attempt any repairs to this Banner device; it contains no field-replaceable parts or components.** If the device, device part, or device component is determined to be defective by a Banner Applications Engineer, they will advise you of Banner's RMA (Return Merchandise Authorization) procedure.

IMPORTANT: If instructed to return the device, pack it with care. Damage that occurs in return shipping is not covered by warranty.

Contact Us

Banner Engineering Corp. | 9714 Tenth Avenue North | Plymouth, MN 55441, USA | Phone: + 1 888 373 6767

For worldwide locations and local representatives, visit www.bannerengineering.com.

Banner Engineering Corp Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. **IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.**

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: www.bannerengineering.com.

For patent information, see www.bannerengineering.com/patents.

