



FEATURES

- Advanced diffused semiconductor and sputtered thin film sensor for maximum stability
- High accuracy and long term stability
- Ranges from 0 inH₂O to 50 inH₂O through 0 psi to 1000 psi
- Corrosion resistant stainless steel construction
- Nosecone standard
- Optional 5-30 Vdc input for 0.5 to 2.5 Vdc output, for field applications
- Optional integrated temperature measurement (PT100 RTD)

APPLICATIONS

- Irrigation
- Food and beverage
- Waste water
- Water distribution
- Level and depth
- Bore hole
- Offshore
- R&D

SERIES 612

SUBMERSIBLE LEVEL TRANSMITTERS

NOSHOK Series 612 Submersible Level Transmitters were designed to provide a previously unequalled level of performance. Utilizing diffused semiconductor and thin film technologies, Series 612 transducers are accurate, shock resistant and extremely stable over long periods of time. Reverse polarity protection and short circuit protection have been installed as standard features. Lightning protection is optional.

Advanced manufacturing techniques combined with technologically advanced standard features allow NOSHOK to offer a level of performance previously found on transducers costing hundreds of dollars more.

A final electrical output and calibration inspection is performed on all NOSHOK transducers prior to shipment to ensure 100% "out of the box" reliability.


SPECIFICATIONS

Output signals	4 mA to 20 mA, 2-wire; 0 Vdc to 5 Vdc and 0 Vdc to 10 Vdc, 3-wire; 0.5 Vdc to 2.5 Vdc, 3-wire
Pressure ranges	0 in H ₂ O to 50 in H ₂ O through 0 psig to 1000 psig
Proof pressure	2 times range
Burst pressure	4 times range
Accuracy	± 0.25 % Full Scale (BFSL); Optional ± 0.125 % Full Scale (BFSL); (Includes the effects of non-linearity, hysteresis, non-repeatability, zero point and full scale errors)
Repeatability	≤ ± 0.05 % Full Scale
Hysteresis	≤ ± 0.1% Full Scale
Stability	≤ ± 0.2 % Full Scale for 1 year, non accumulating
Load limitations	≤ (VPower-10)/0.020 Amp for 4 mA to 20 mA ≥ 10,000 Ω for 0 Vdc to 10 Vdc, 3-wire ≥ 5,000 Ω for 0 Vdc to 5 Vdc, 3-wire
Wetted materials	Housing: 316 stainless steel Cap: Polyamide, 316 stainless steel with weighted nosecone Cable: Polyurethane, Teflon available on special versions PVC with double water block
Power supply	10 Vdc to 30 Vdc for current output, unregulated 14 Vdc to 30 Vdc for voltage output, unregulated 5 Vdc to 30 Vdc for 0.5 Vdc to 2.5 Vdc output, unregulated
Temperature ranges	Compensated 32 °F to 122 °F/0 °C to 50 °C Effect ± 0.01 %/°F for zero and span Storage -22 °F to 175 °F/-30 °C to 80 °C Medium 14 °F to 122 °F /-10 °C to 50 °C
Response time	≤ 1 ms (between 10 % to 90 % Full Scale)
Durability	>100,000,000 Full Scale cycles
Environmental protection	NEMA 6P, IP68
Electromagnetic rating	CE compliant to EMC norm EN61326: 1997/A1: 1998 RFI, EMI and ESD protection
Electrical protection	Reverse polarity protection, short circuit and optional lightning protection per EN 6100-4-5; 1.5J
Shock	Less than ± 0.05 % Full Scale effect for 100 g's @ 20 ms on any axis
Vibration	Less than ± 0.01 % Full Scale effect for 15 g's @ 0 Hz to 2000 Hz on any axis
Weight	Approximately 7 oz. with standard nosecone - cable extra

ORDERING INFORMATION								
SERIES	612							
PRESSURE RANGES	0 inH ₂ O to 50 inH ₂ O	50 inH₂O	0 psig to 2 psig (4.6 ftH ₂ O)	2	0 psig to 20 psig (46.2 ftH ₂ O)	20	0 psig to 200 psig (461.3 ftH ₂ O)	200
	0 inH ₂ O to 100 inH ₂ O	100 inH₂O	0 psig to 3 psig (6.9 ftH ₂ O)	3	0 psig to 25 psig (57.7 ftH ₂ O)	25	0 psig to 300 psig (692.5 ftH ₂ O)	300
	0 inH ₂ O to 150 inH ₂ O	150 inH₂O	0 psig to 5 psig (11.5 ftH ₂ O)	5	0 psig to 30 psig (69.2 ftH ₂ O)	30	0 psig to 350 psig (807.9 ftH ₂ O)	350
	0 inH ₂ O to 200 inH ₂ O	200 inH₂O	0 psig to 10 psig (23.1 ftH ₂ O)	10	0 psig to 60 psig (138.5 ftH ₂ O)	60	0 psig to 500 psig (1154.2 ftH ₂ O)	500
	0 inH ₂ O to 400 inH ₂ O	400 inH₂O	0 psig to 15 psig (34.6 ftH ₂ O)	15	0 psig to 100 psig (230.8 ftH ₂ O)	100	0 psig to 750 psig (1733.3 ftH ₂ O)	750
	psig = Gauge Pressure Other ranges available on special request				0 psig to 150 psig (346.3 ftH ₂ O)	150	0 psig to 1000 psig (2311.0 ftH ₂ O)	1000
ACCURACY	1	± 0.25 % Full Scale (BFSL)			2	± 0.125 % Full Scale (BFSL)		
OUTPUT SIGNALS	1	4 mA to 20 mA, 2-wire			5	0 Vdc to 10 Vdc, 3-wire		
	2	0 Vdc to 5 Vdc, 3-wire			11	0.5 Vdc to 2.5 Vdc, 3-wire		
PROCESS CONNECTIONS	N	nosecone			W	nosecone w/added weight (1.1 lbs.)		
	T	G 1/2 B x 1/2 " NPT Male with 1/4 " NPT Female						
ELECTRICAL CONNECTIONS	-XX	Standard Polyurethane cable						
	-22-XX	Optional Water-blocked PVC cable (200+ psi only)						
	-38-XX	Optional FEP cable						
		NOTE: XX=length of cable in feet.						
OPTIONS	PTI	PT100 RTD						

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

EXAMPLE

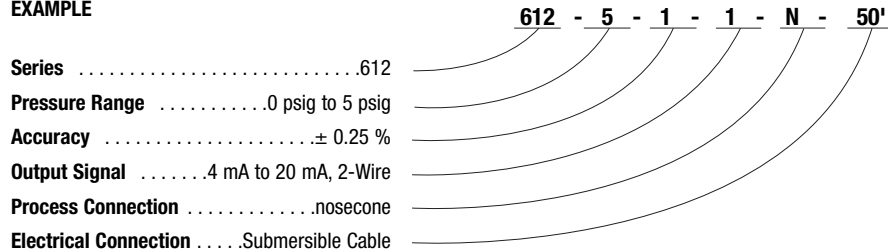

Outline Dimensions



Weighted nosecone



NPT adapter



2-WIRE WIRING

Wiring	Cable
+ Supply	Red
+ Output	Black

3-WIRE WIRING

Wiring	Cable
+ Supply	Red
Common	Black
+ Output	White

Optional Accessories

Dust filter	612-Filter-Element
Desiccant Cartridge	612-Desiccant Cartridge
Cable Clamp	612-Cable Clamp