

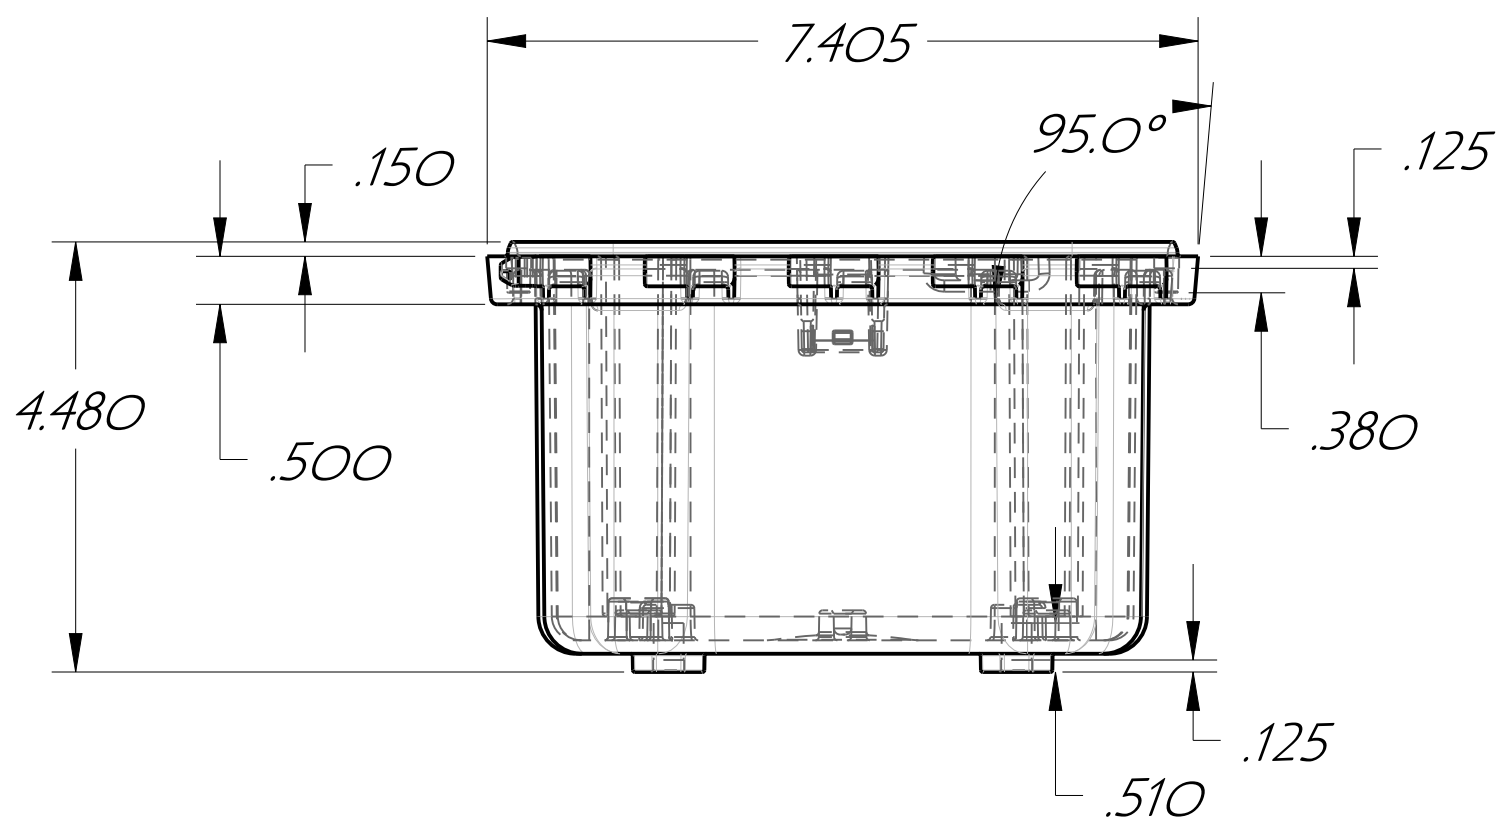
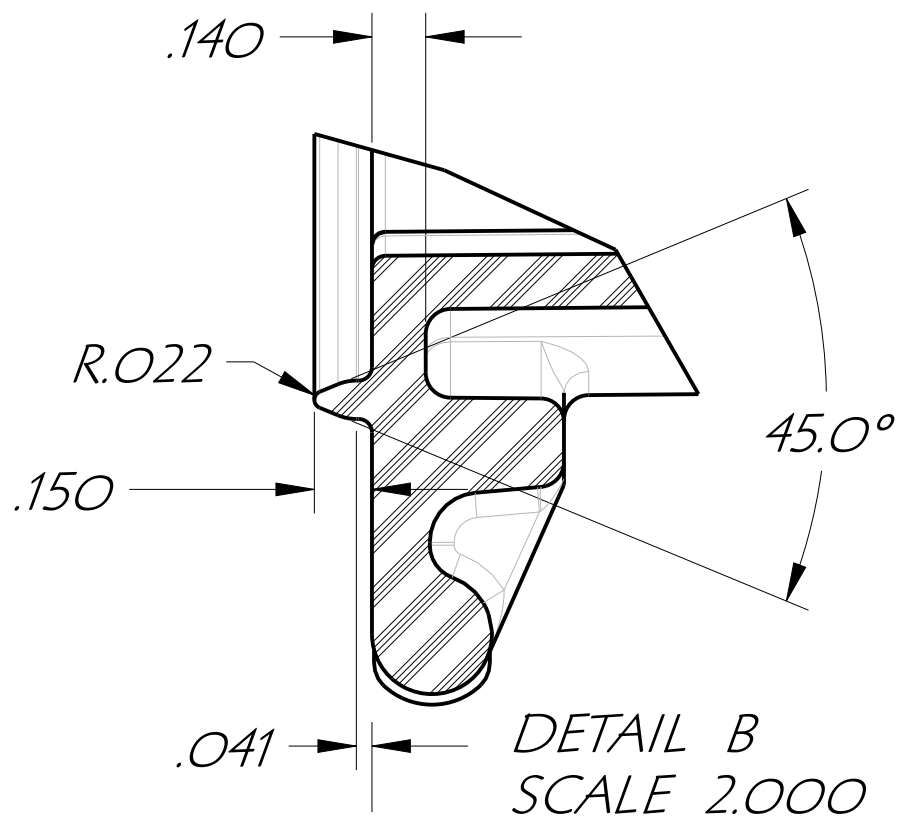
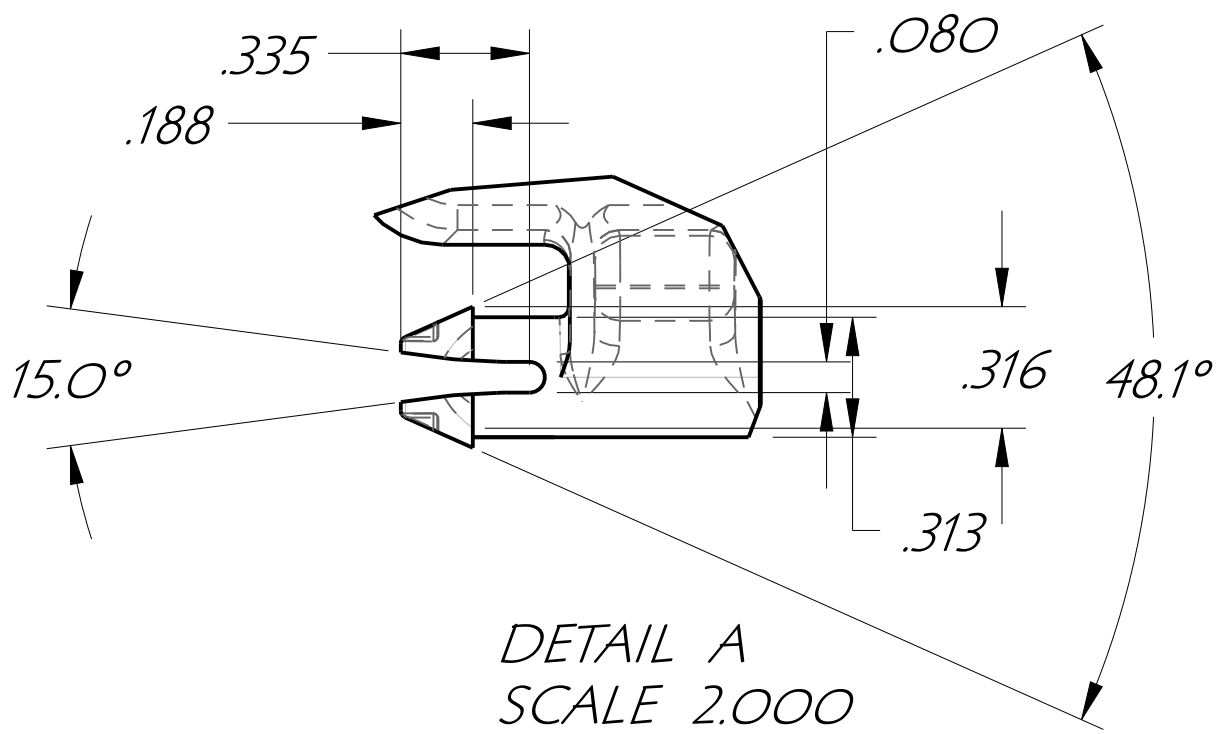
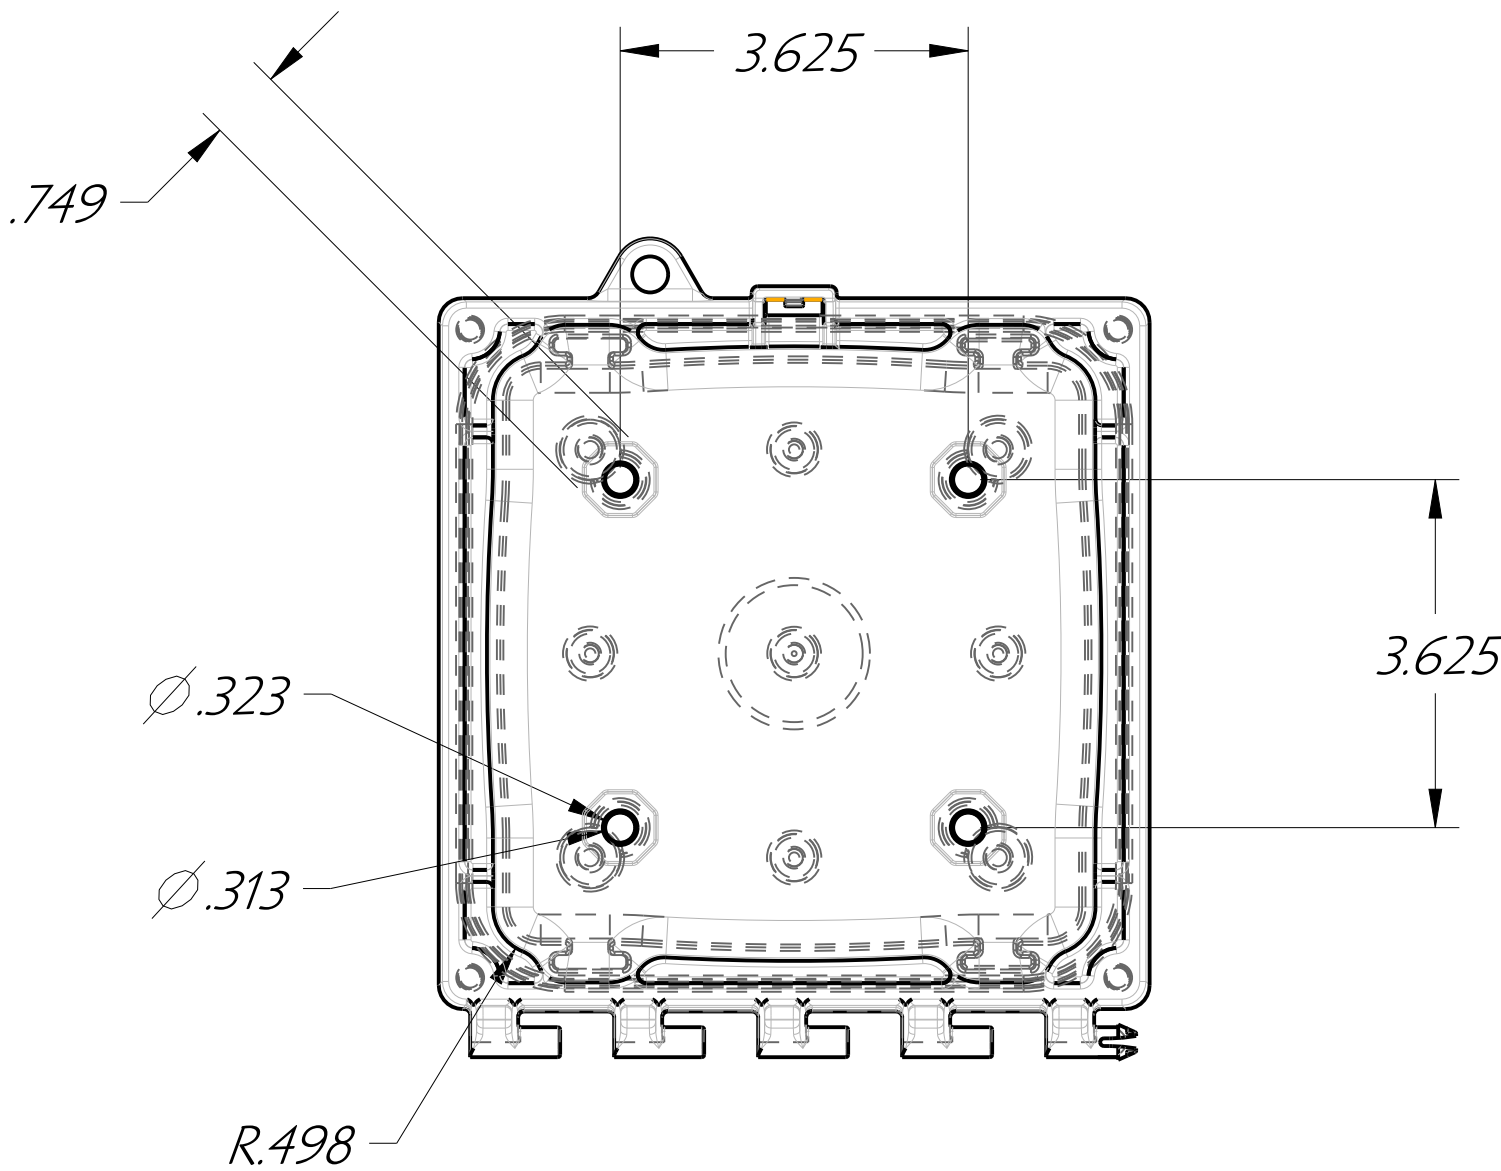
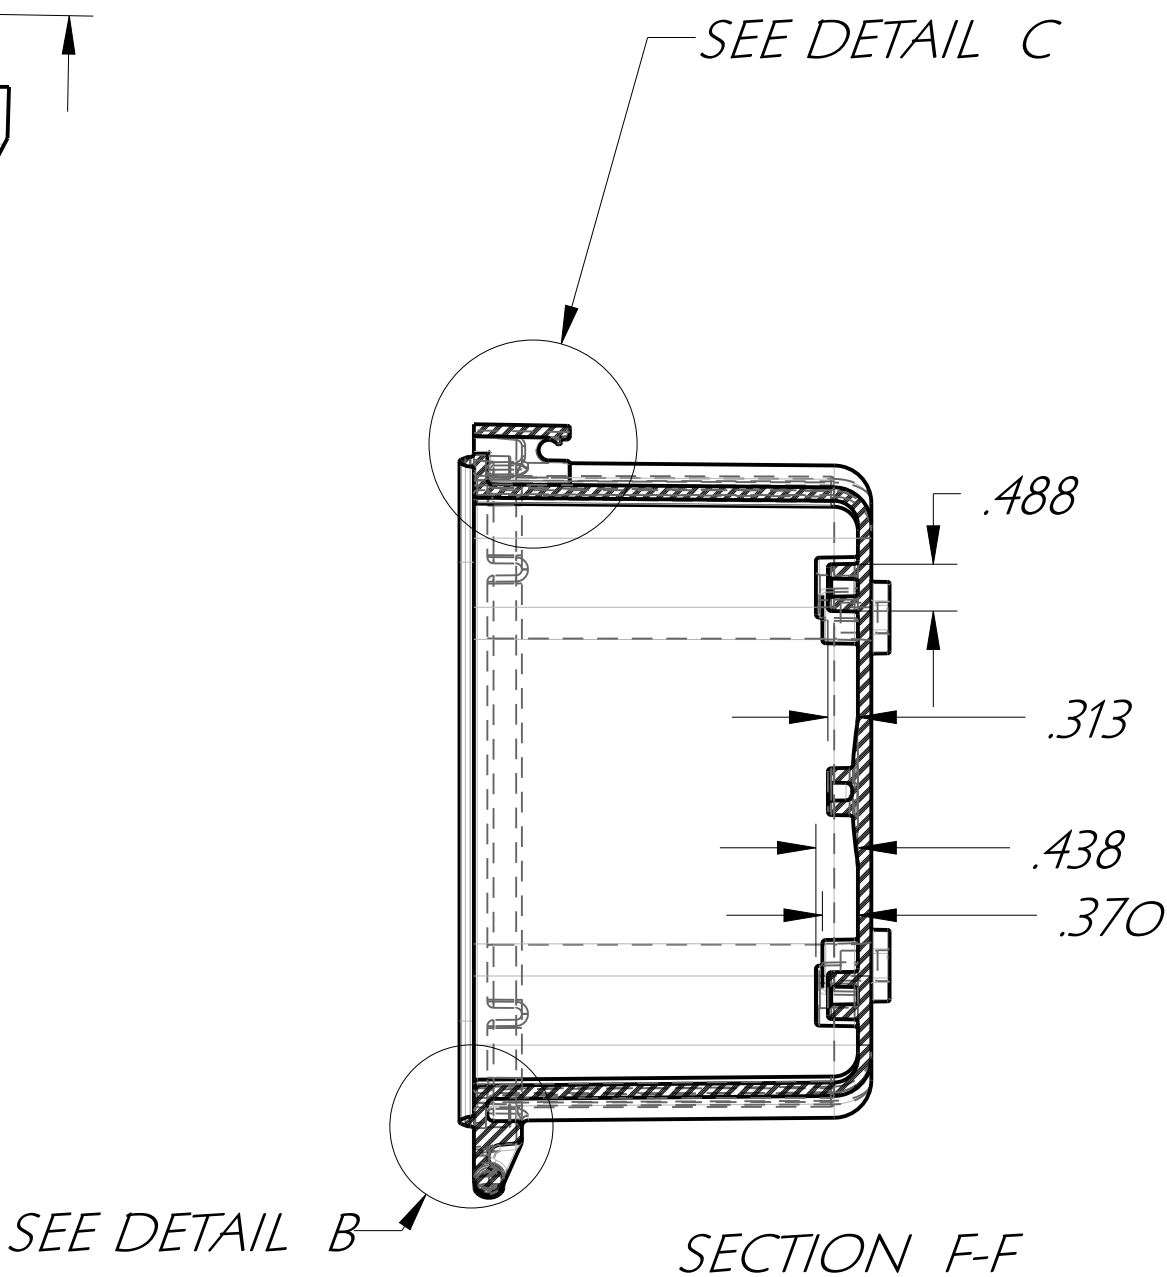
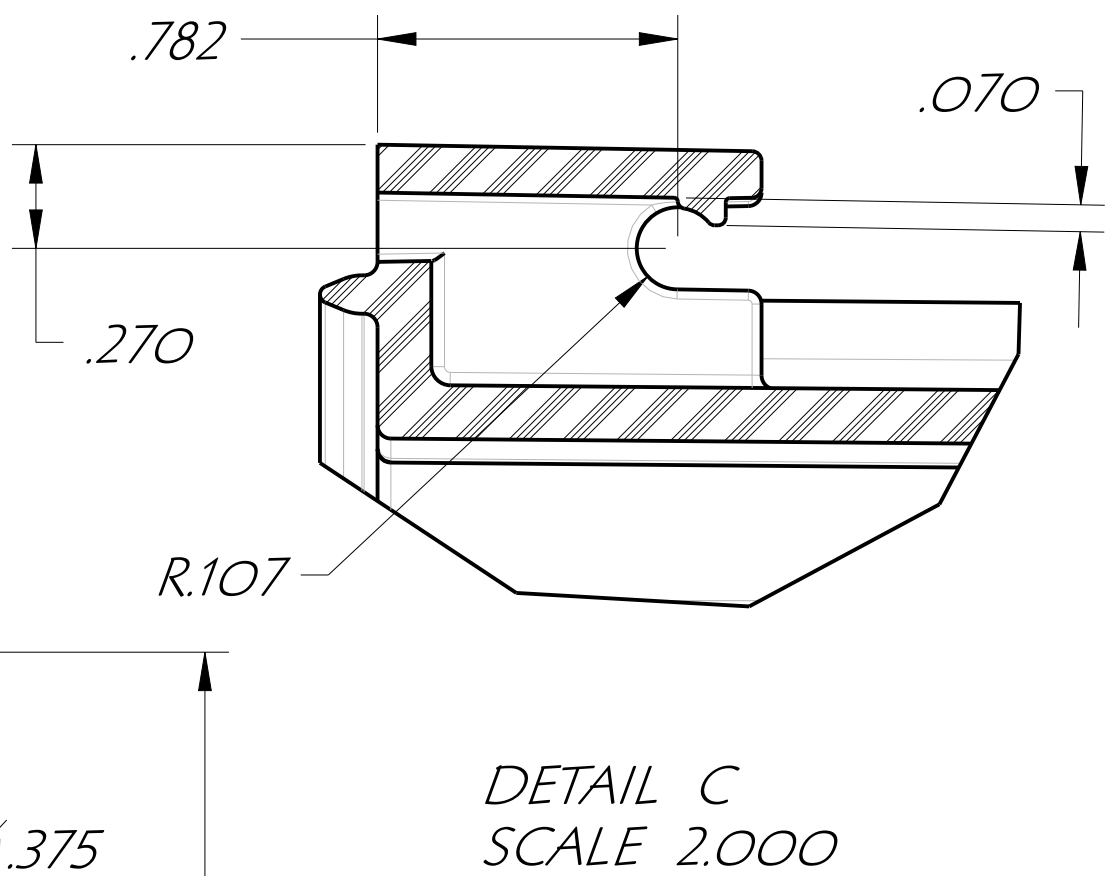
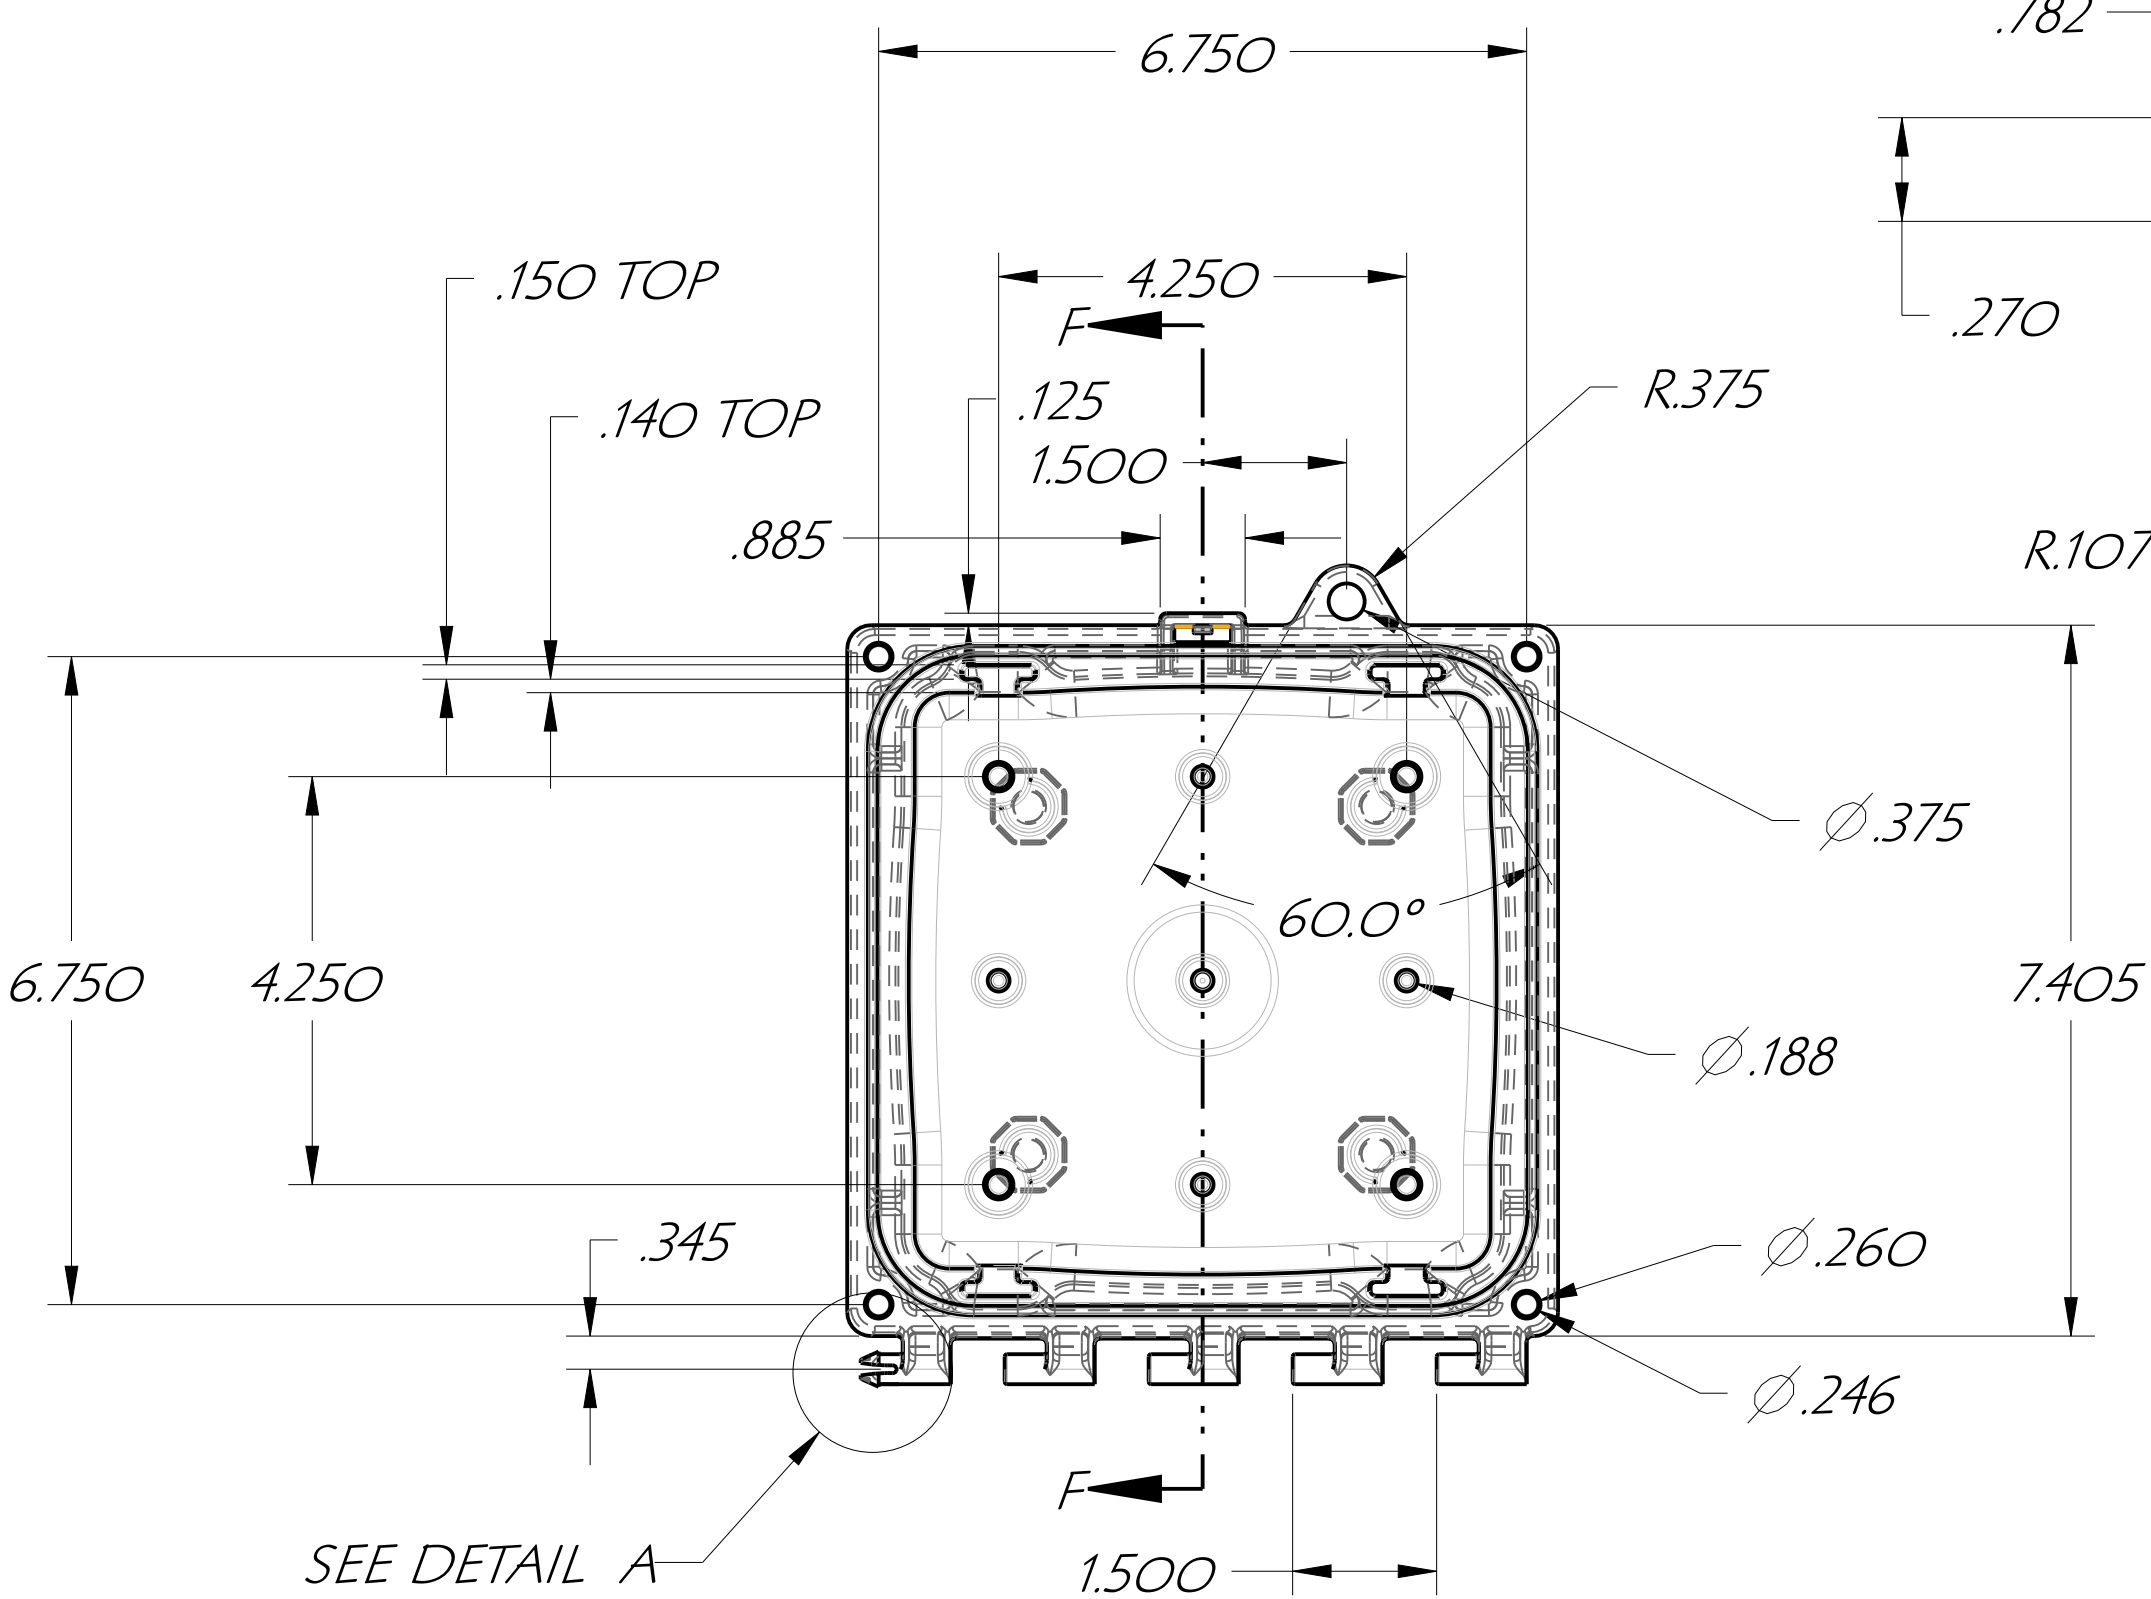


NOTE: Thread bosses use #10 x 3/8 Trilobular thread forming screw





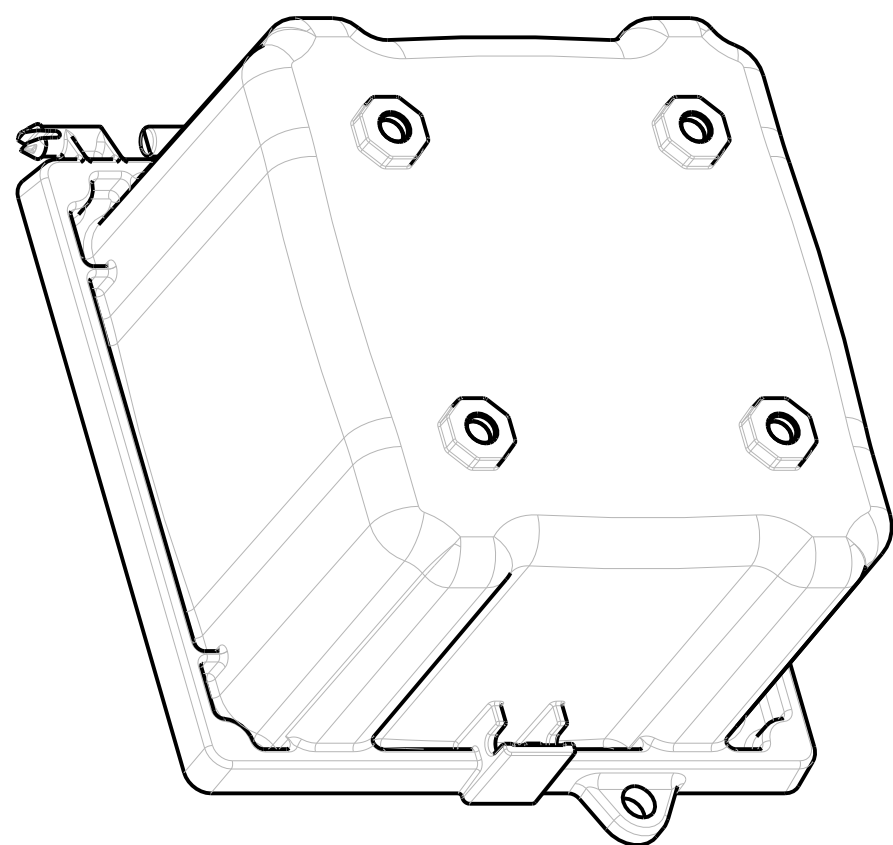


6 X 6 ENCLOSURE




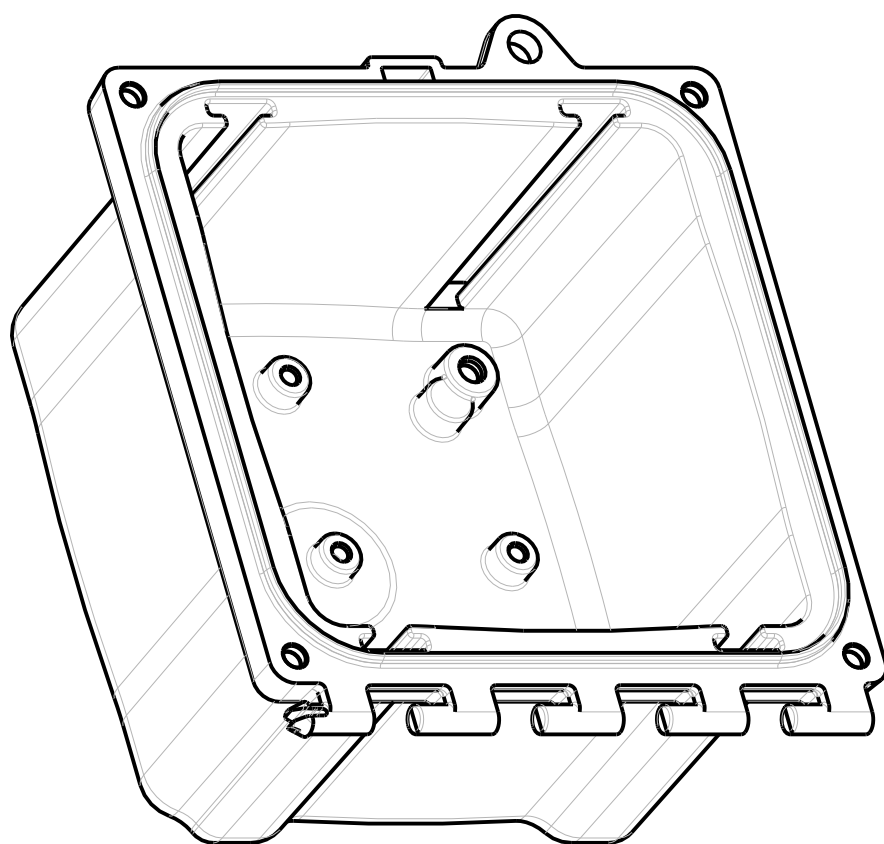


DES.	C.R.W.	DRN.	C.R.W.	CHKD.
APP.	DATE	10/16/07	SCALE	
TOLERANCES:		2 PLACE DEC.	± .010	FRAC.
UNLESS OTHERWISE SHOWN		3 PLACE DEC.	± .005	± 1/64
		4 PLACE DEC.	± .0005	

ATTABOX		CUSTOMER	
PART NAME	ENCLOSURE & LID	PART NO.	
PART MATL	POLYCARBONATE	SHRINK	.006/IN.
TOOL DESC.	SINGLE CAVITY INJECTION MOLD	SHEET	OF

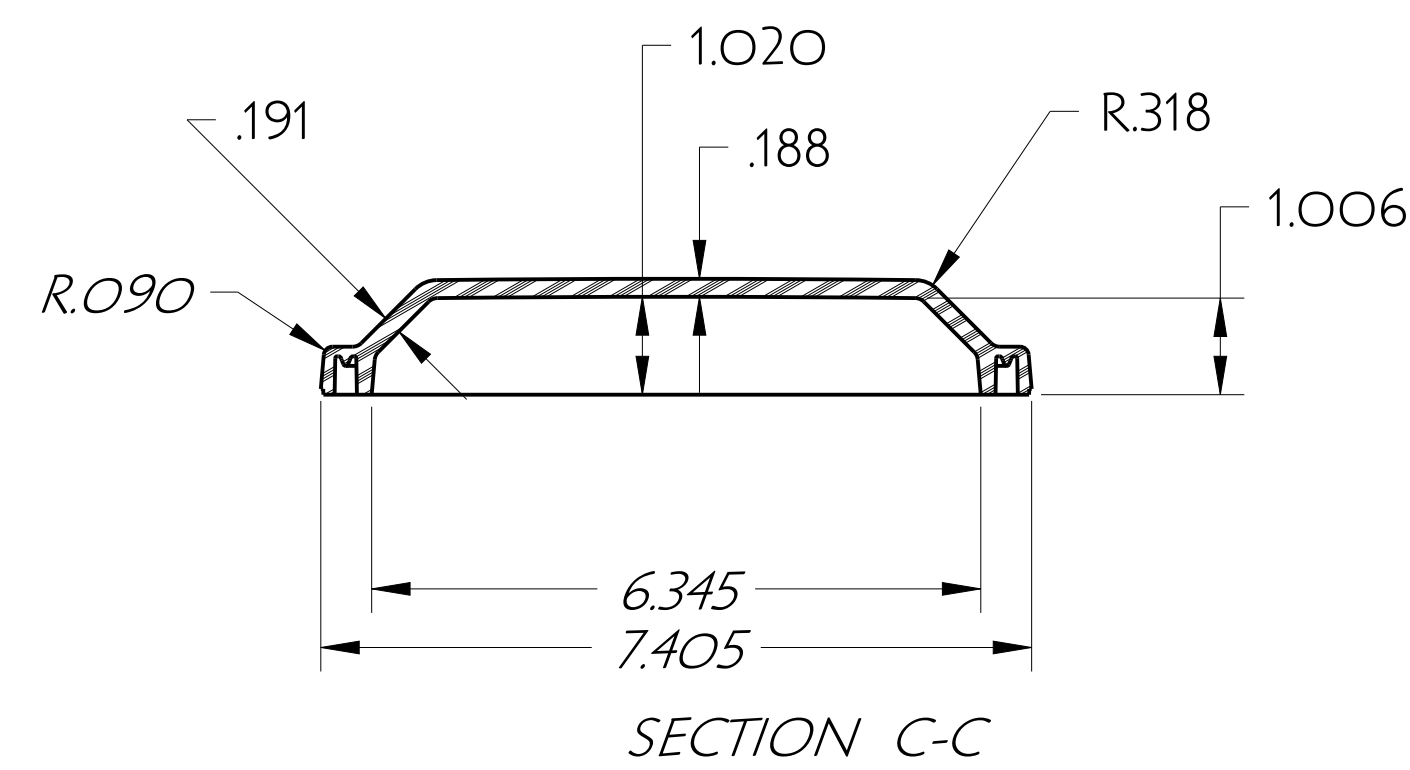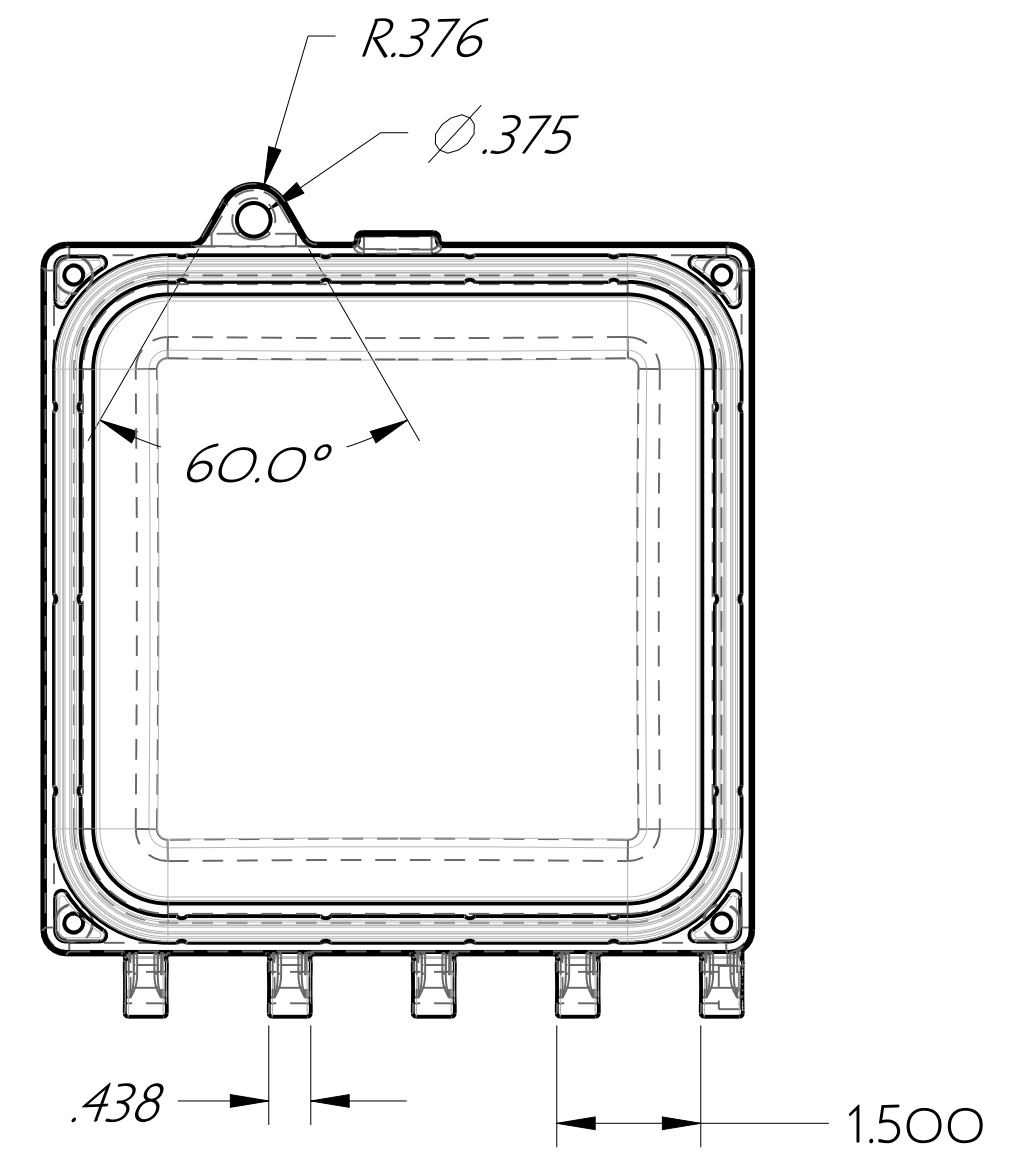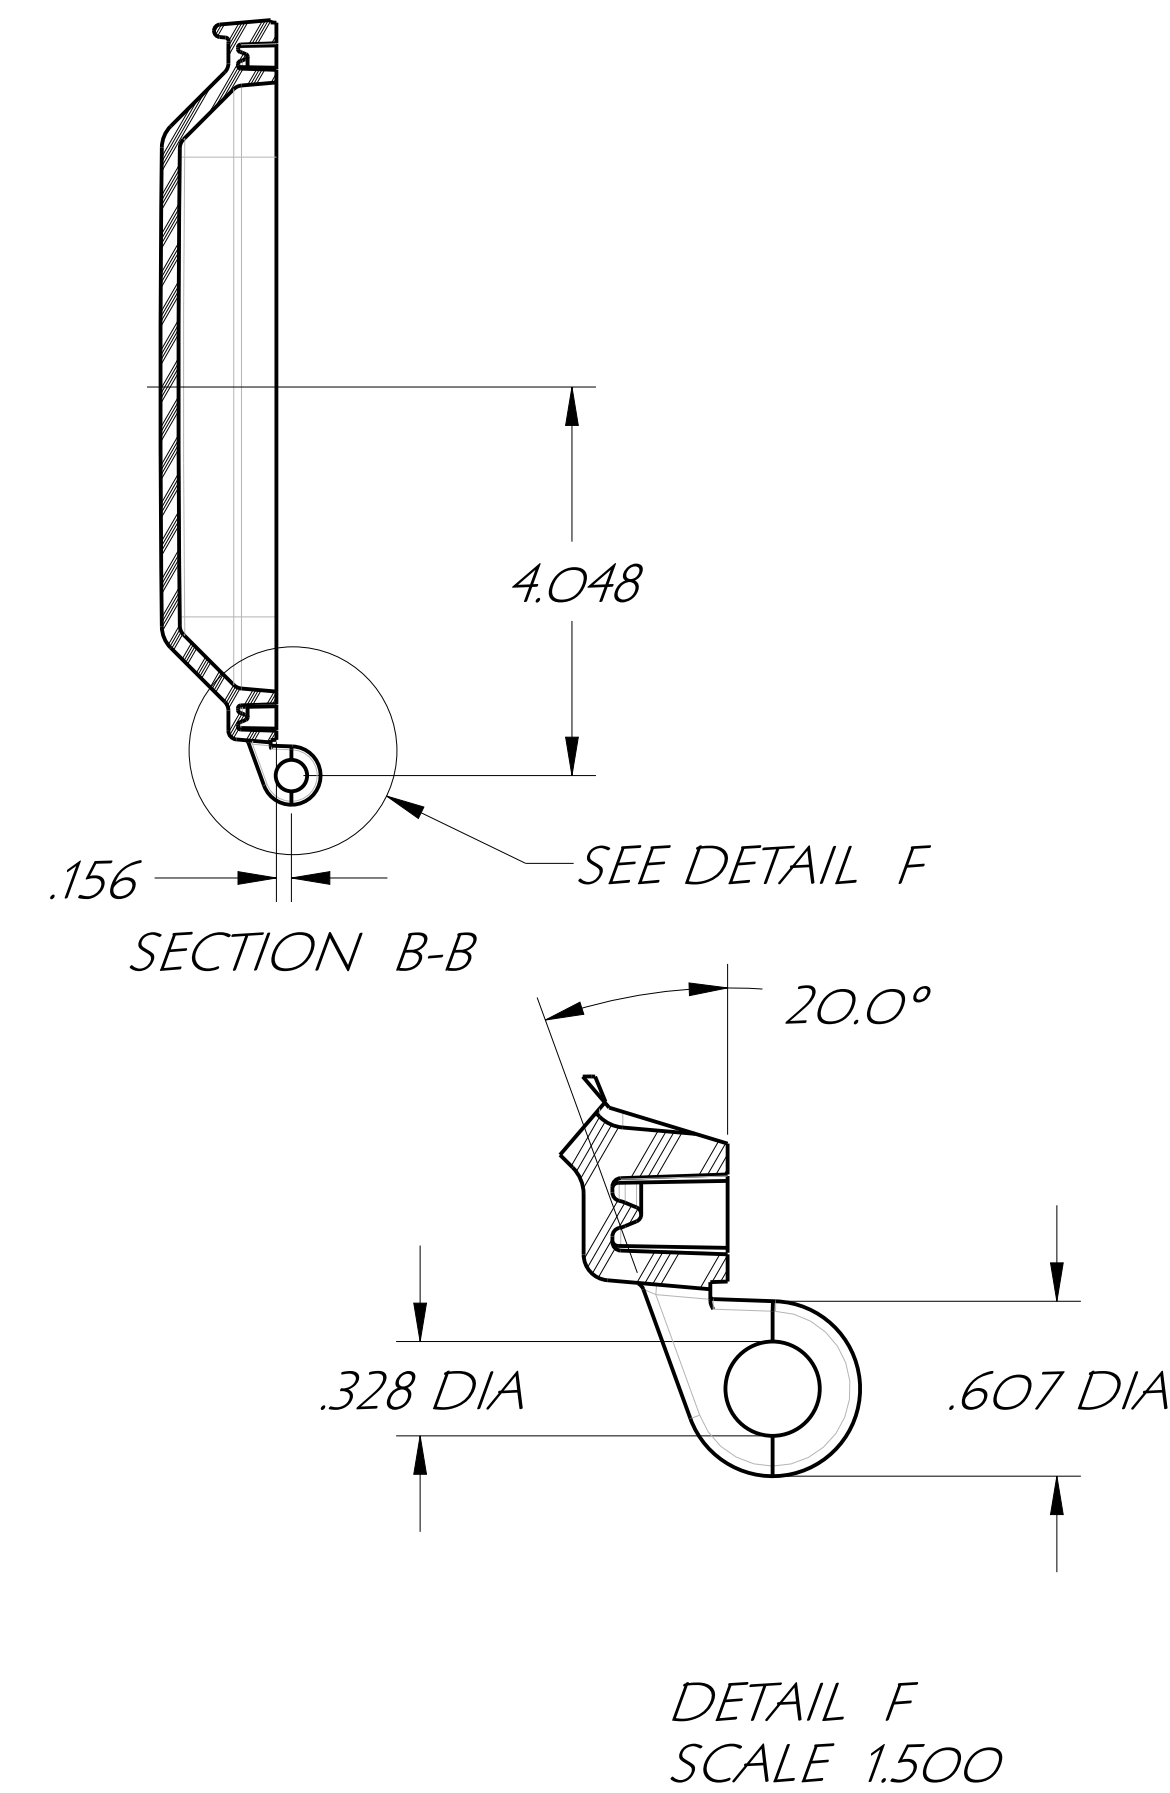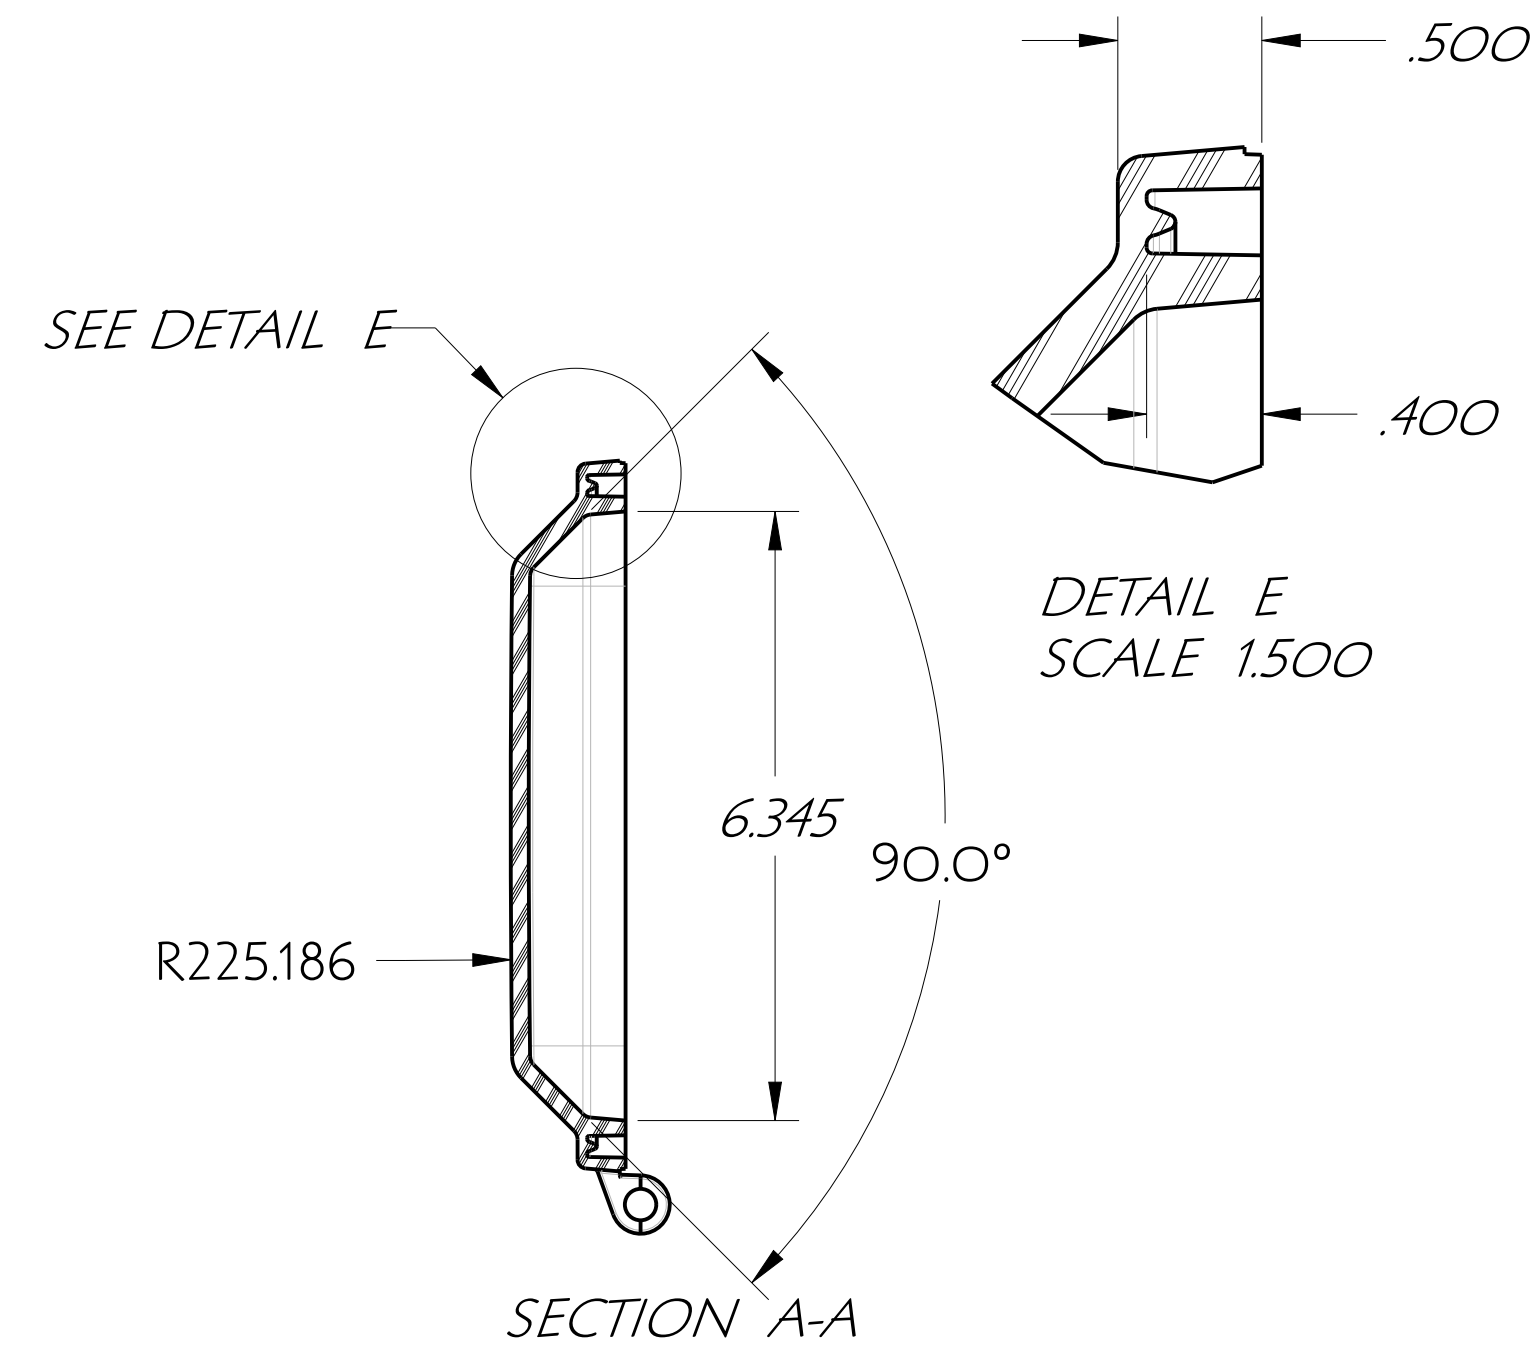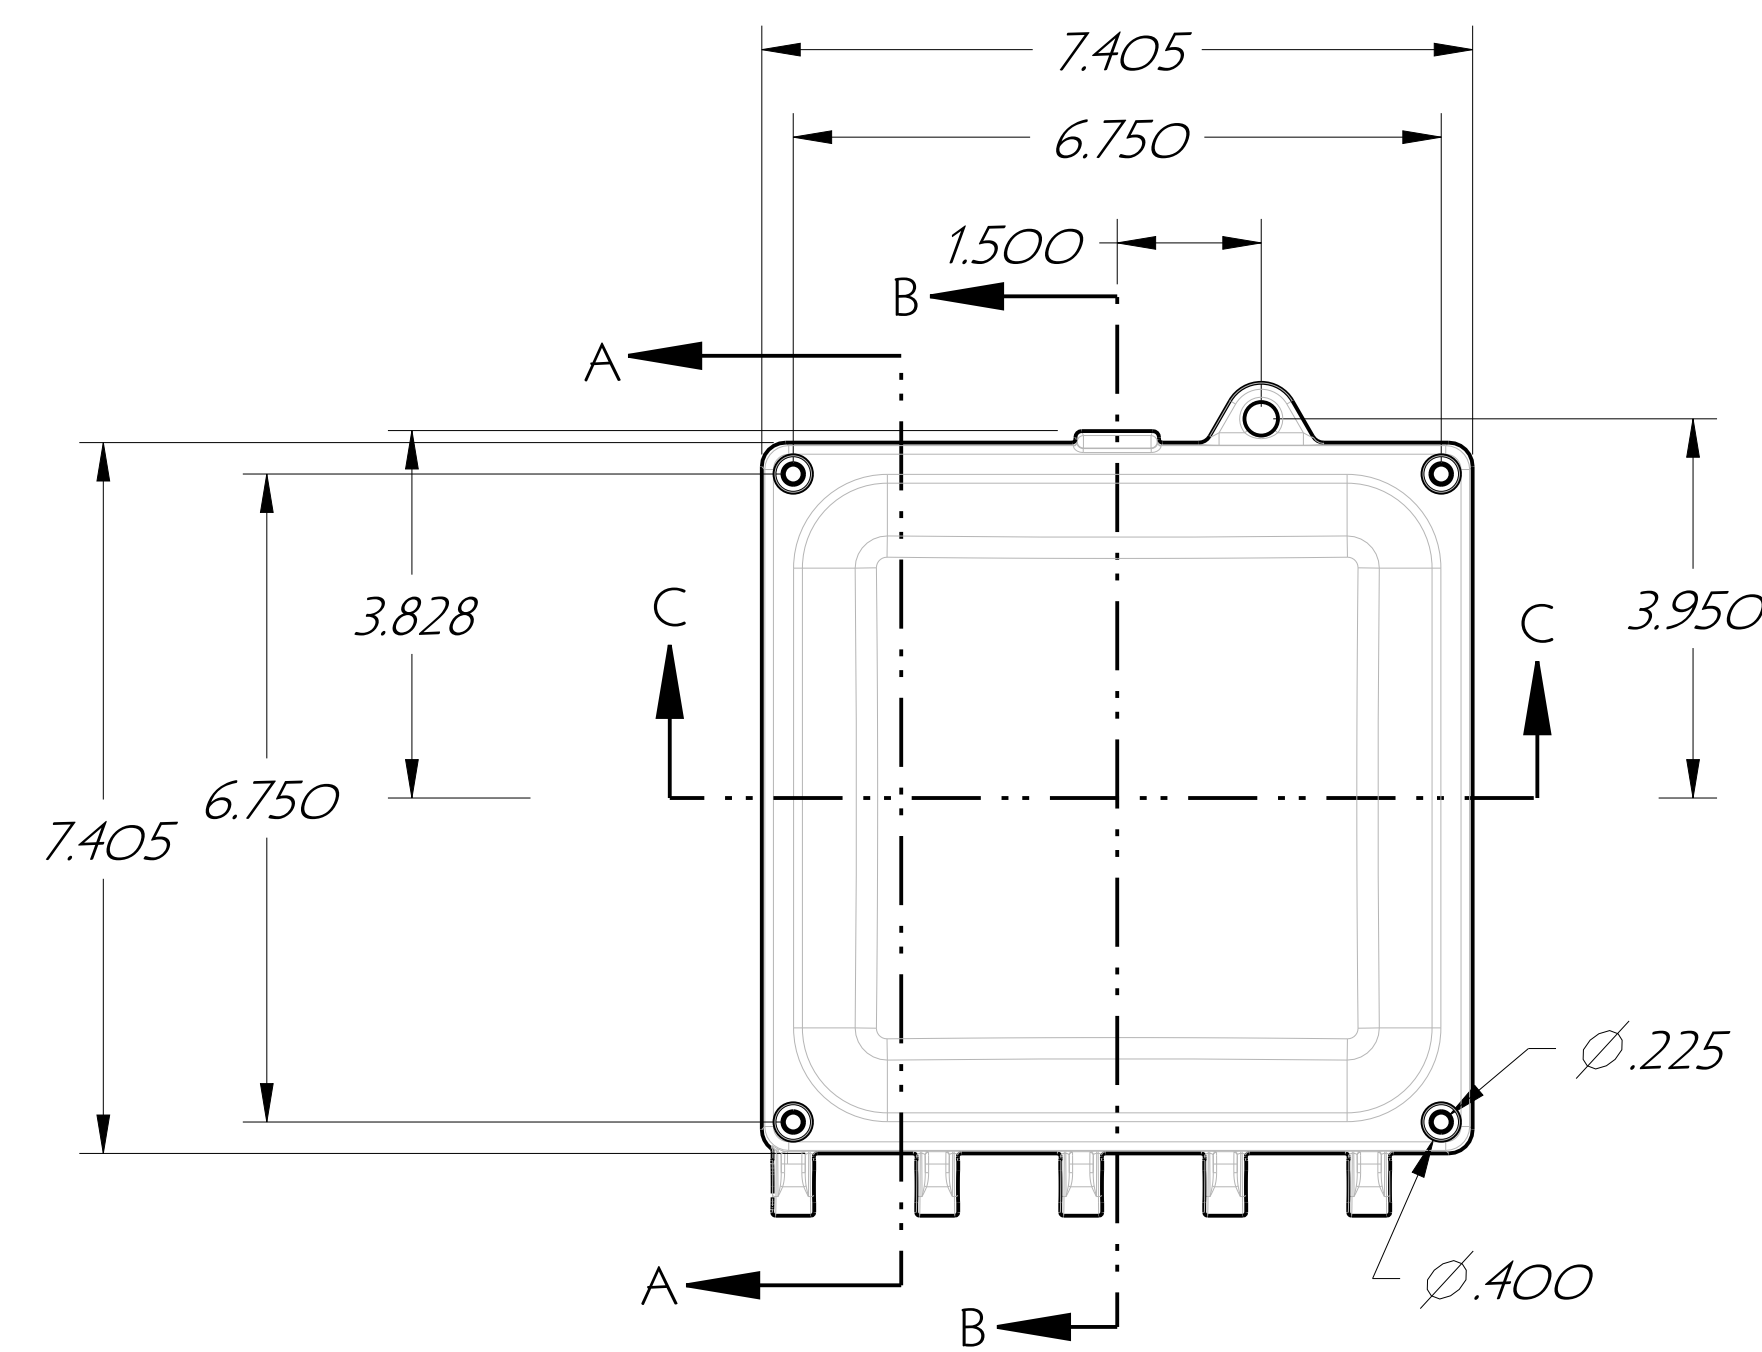


6 X 6 LID

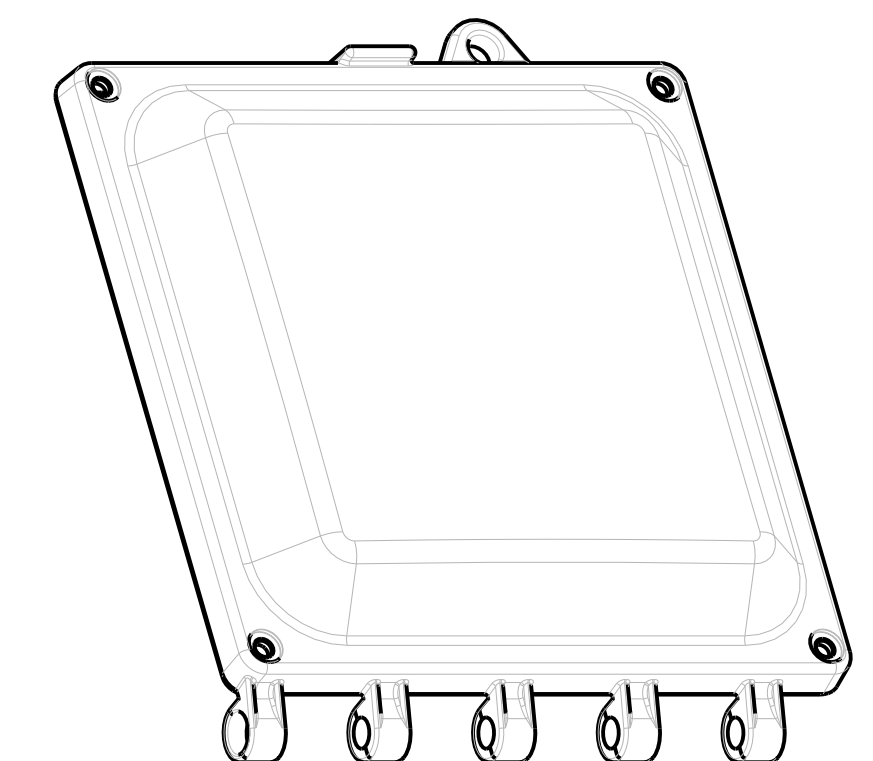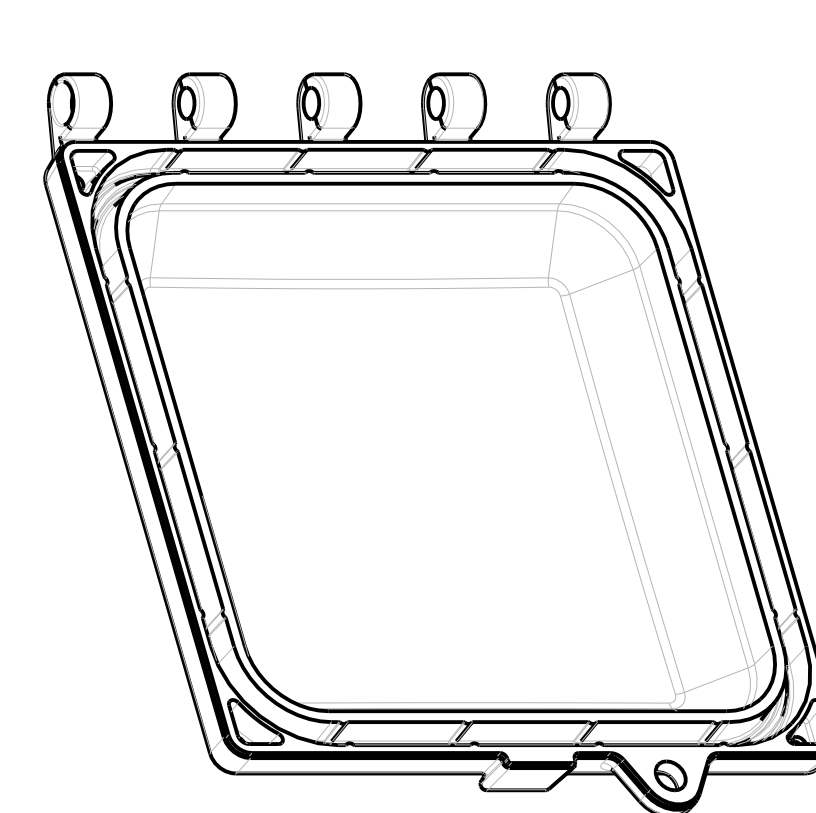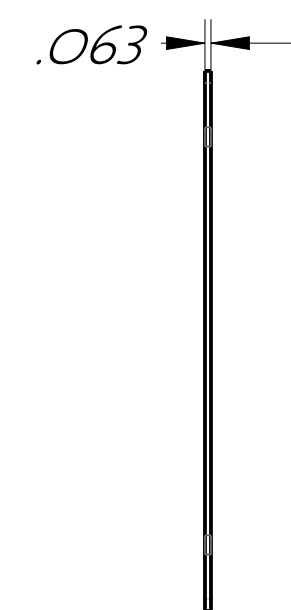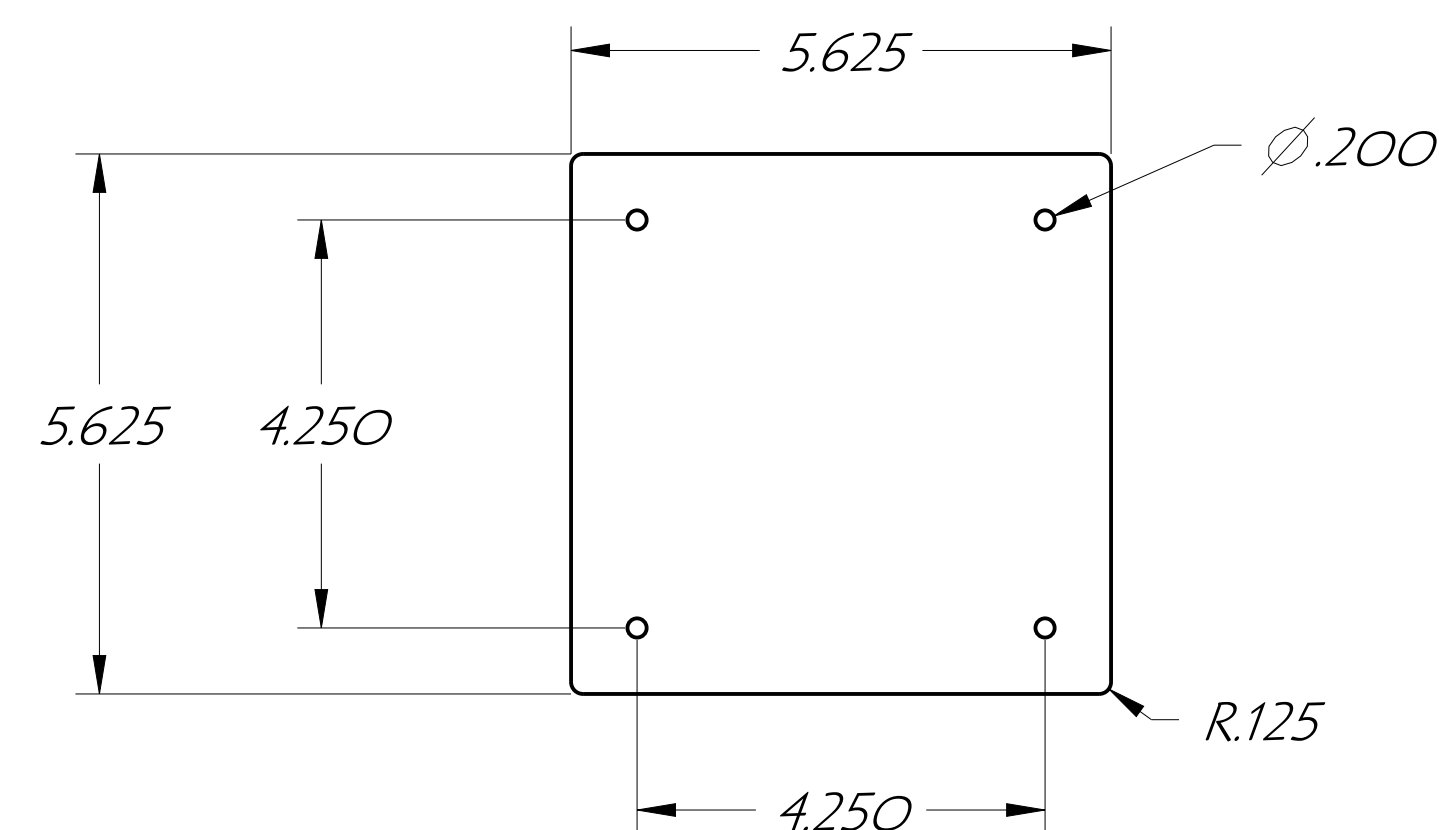


SUB PANEL OR SWING PANEL


DES. C.R.W. DRN. C.R.W. CHKD.	ATTABOX			CUSTOMER
APP. DATE 10/16/07 SCALE				
TOLERANCES: 2 PLACE DEC. ±.010 3 PLACE DEC. ±.005 4 PLACE DEC. ±.0005	PART NAME ENCLOSURE & LID			PART MATL POLYCARBONATE
UNLESS OTHERWISE SHOWN	TOOL DESC. SINGLE CAVITY INJECTION MOLD			SHRINK .006/IN. SHEET OF

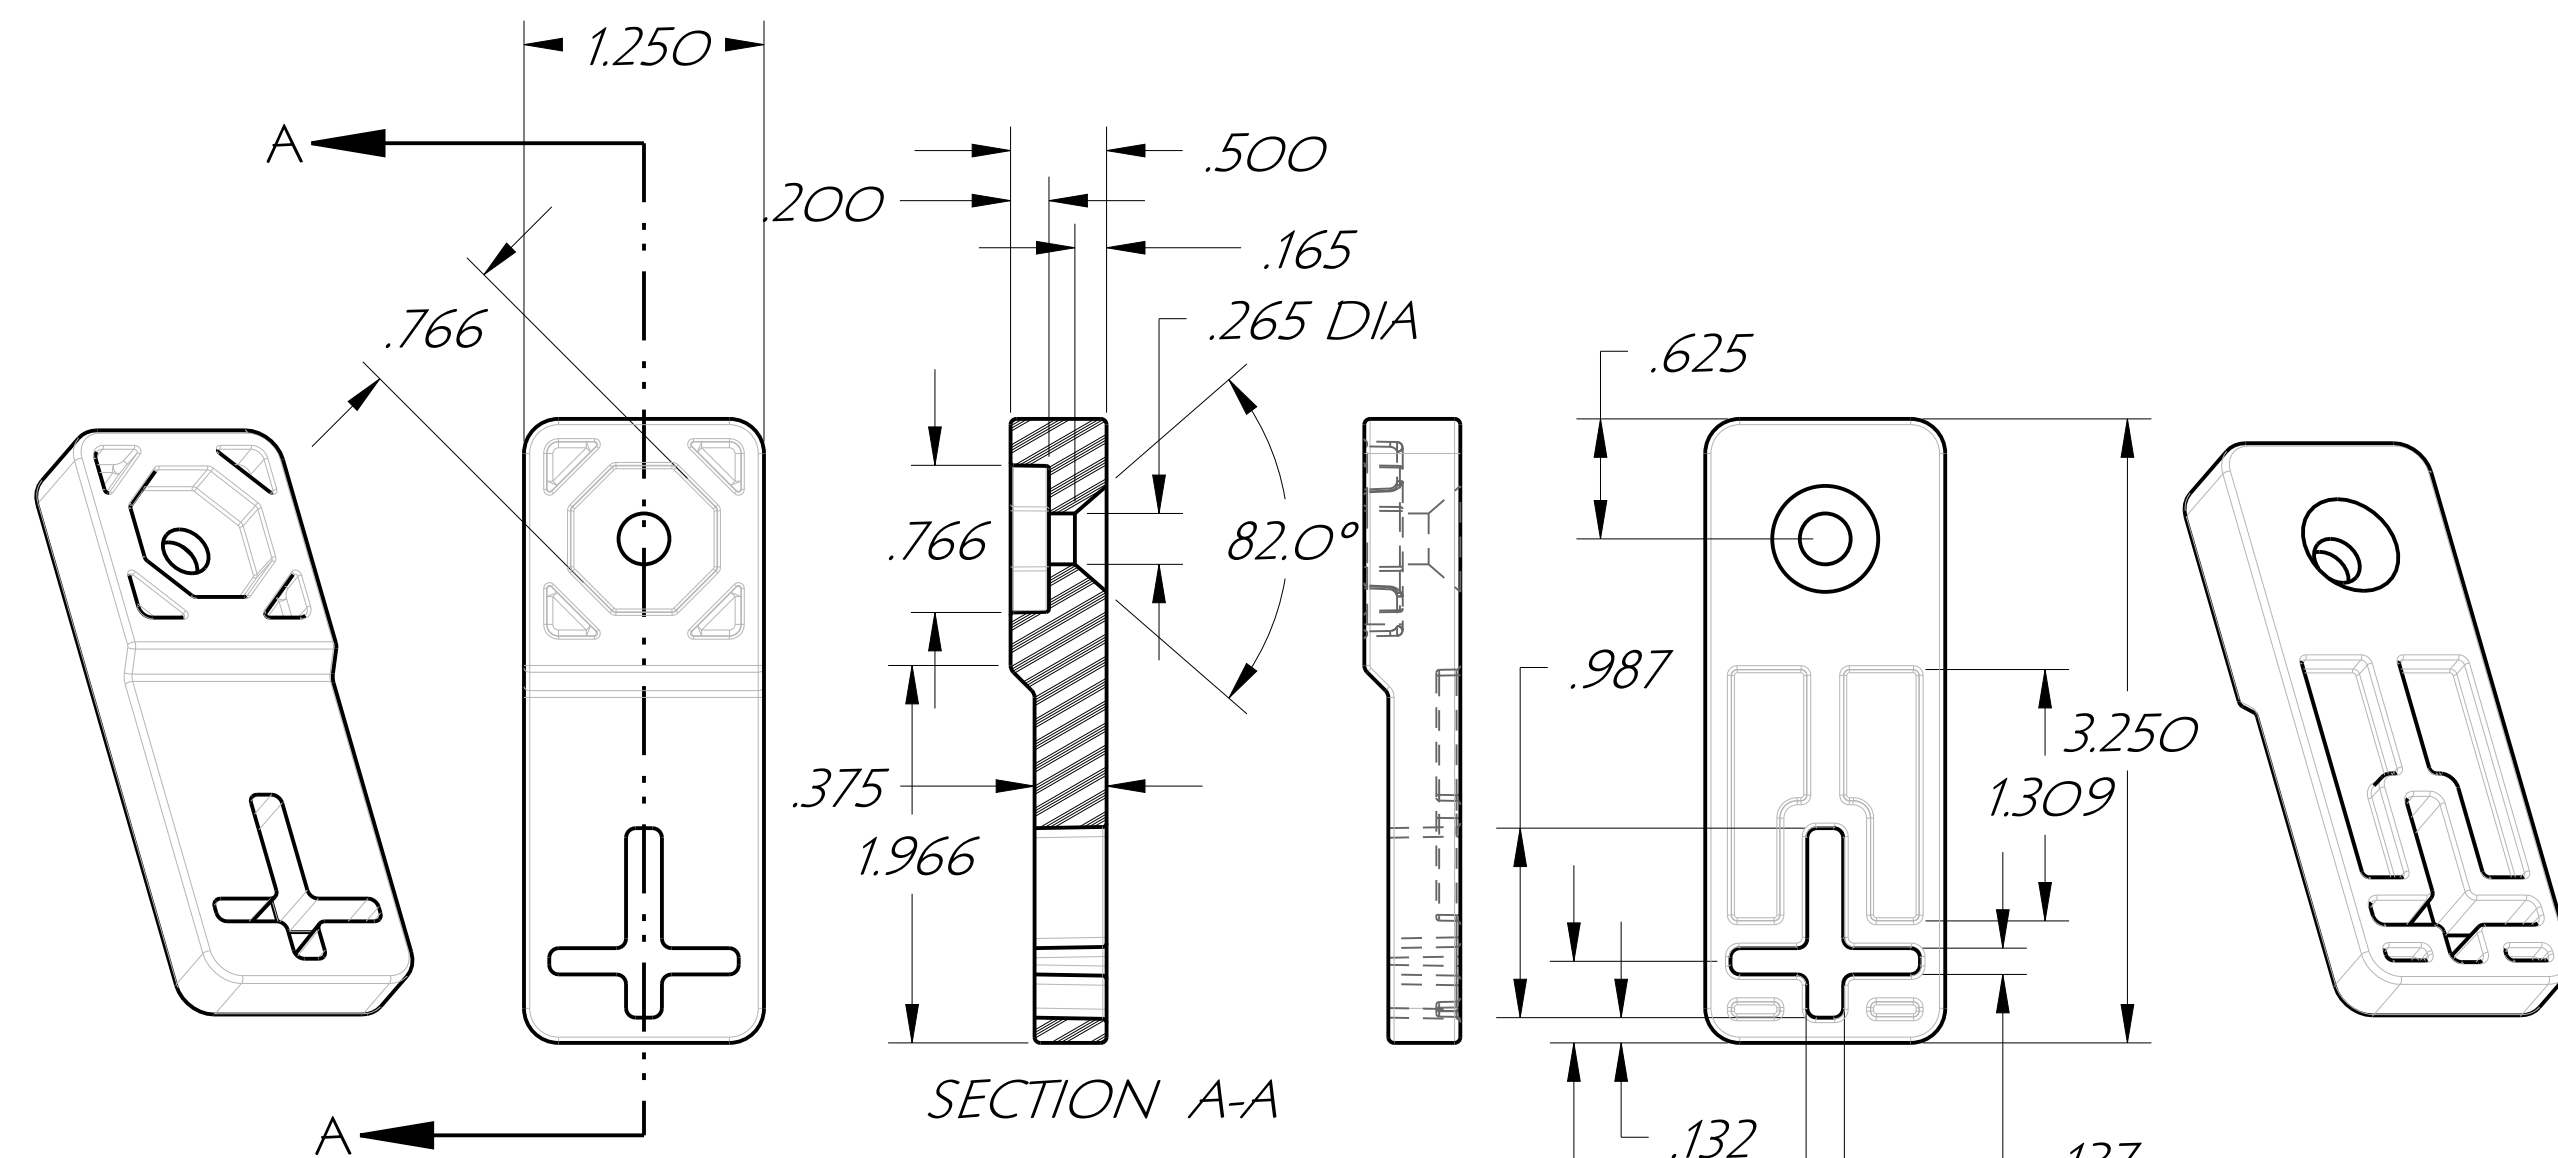



ADJUSTABLE FOOT MOUNT

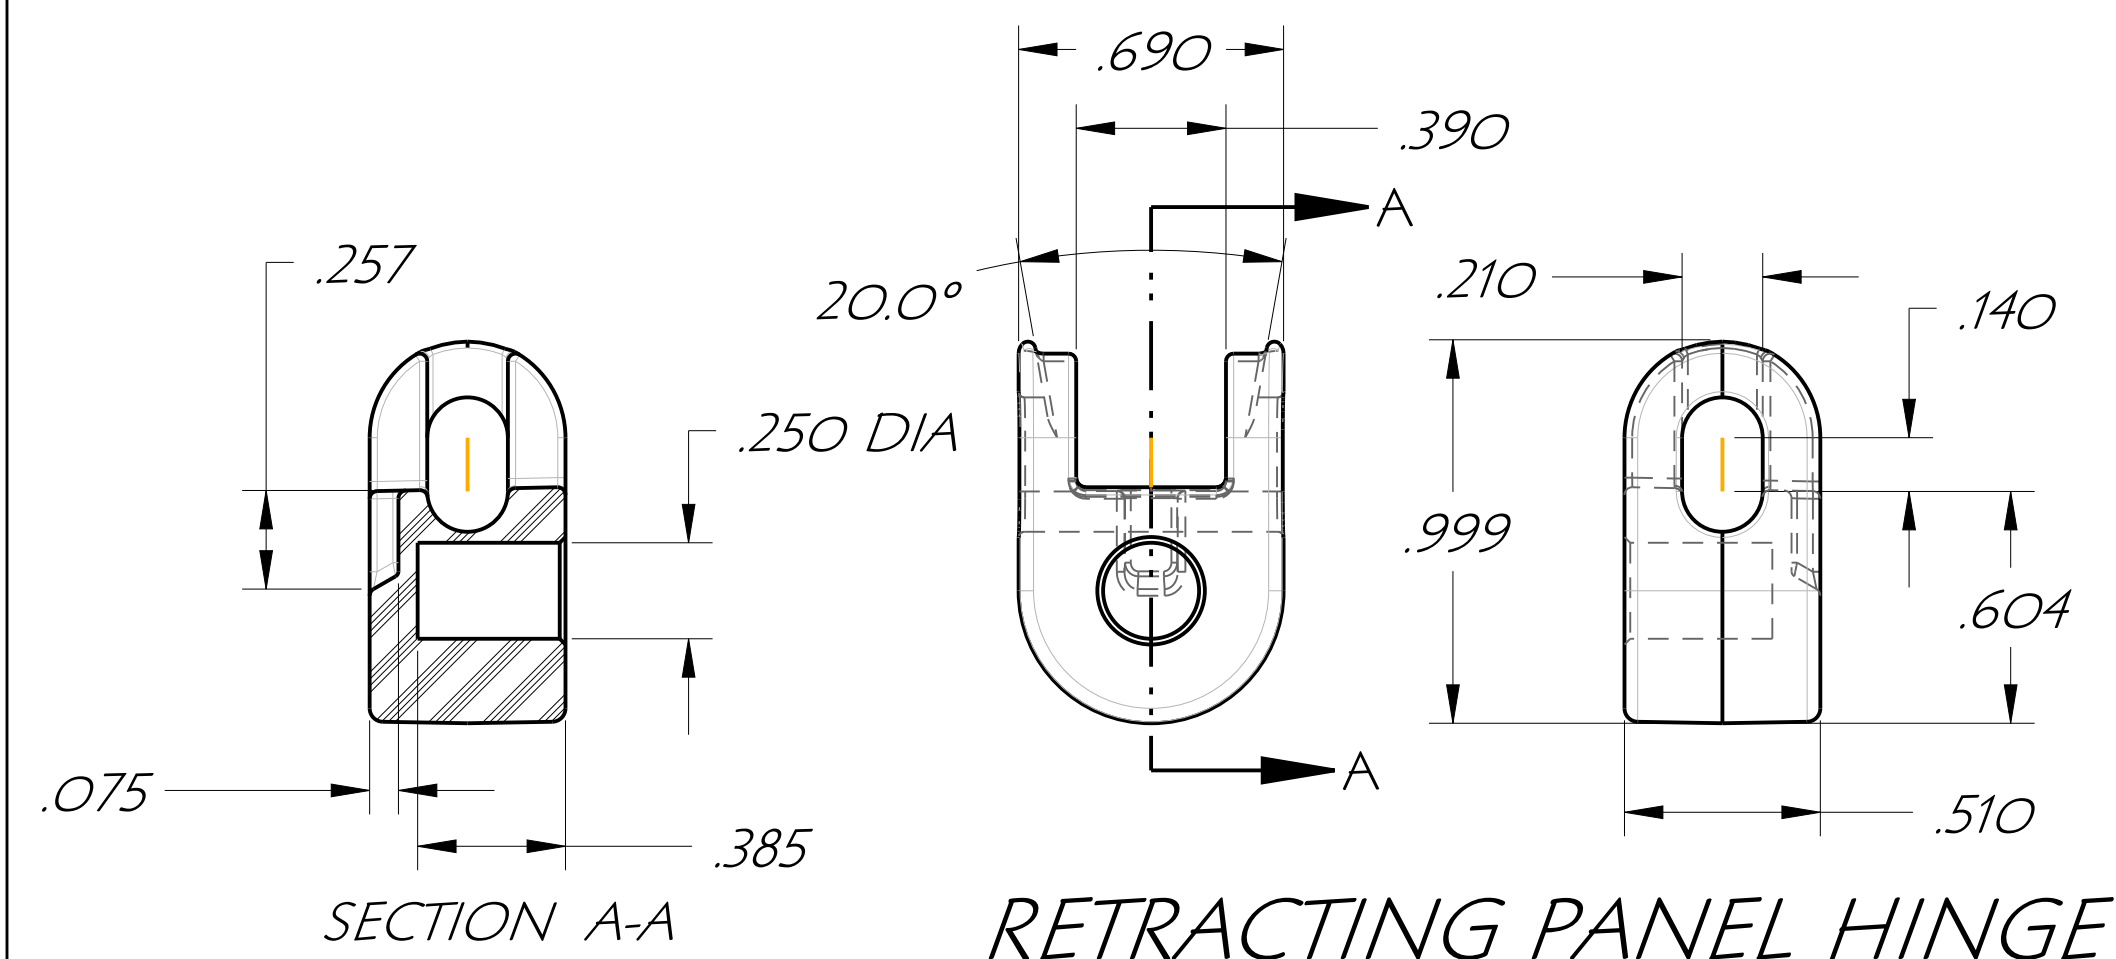


RETRACTING PANEL HINGE

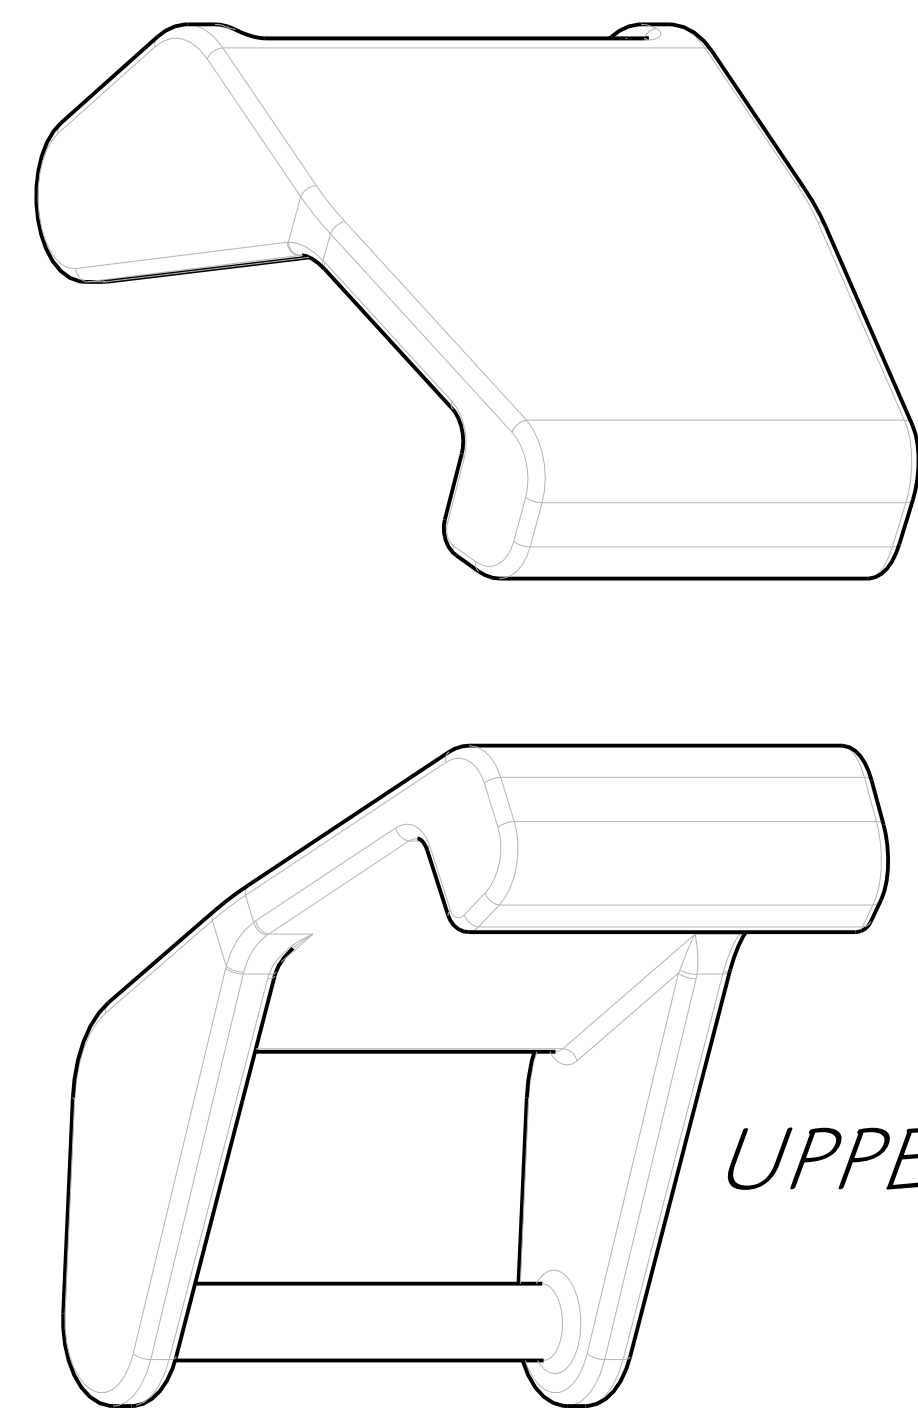


UPPER LATCH

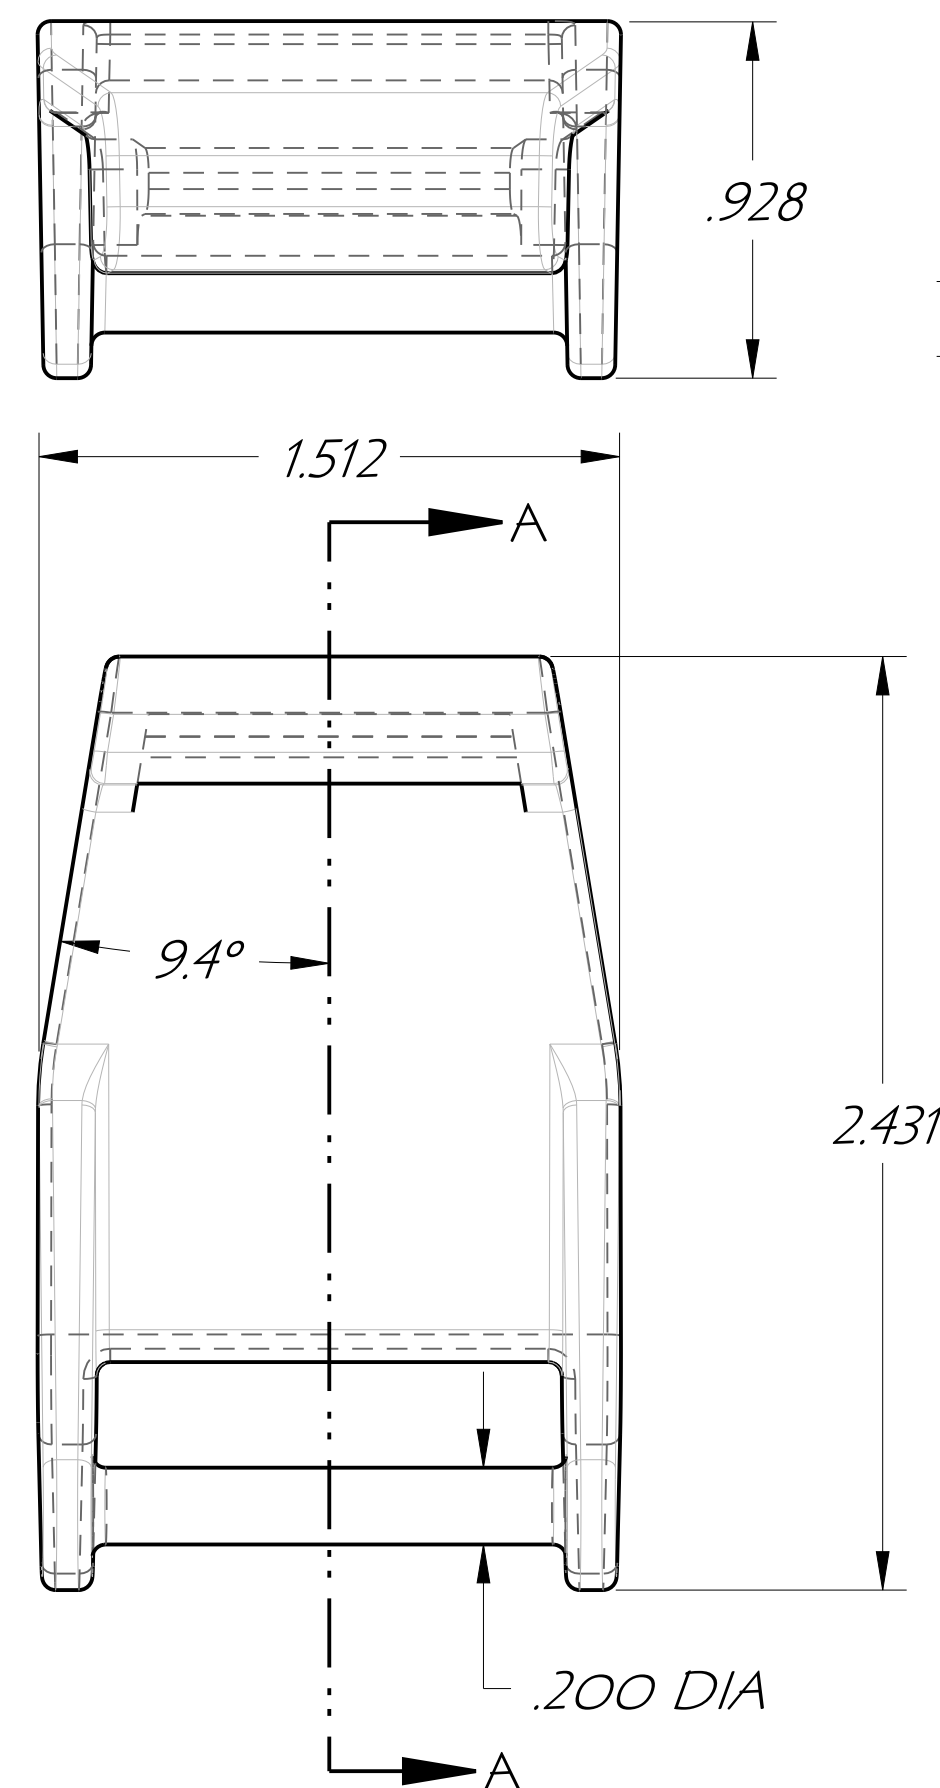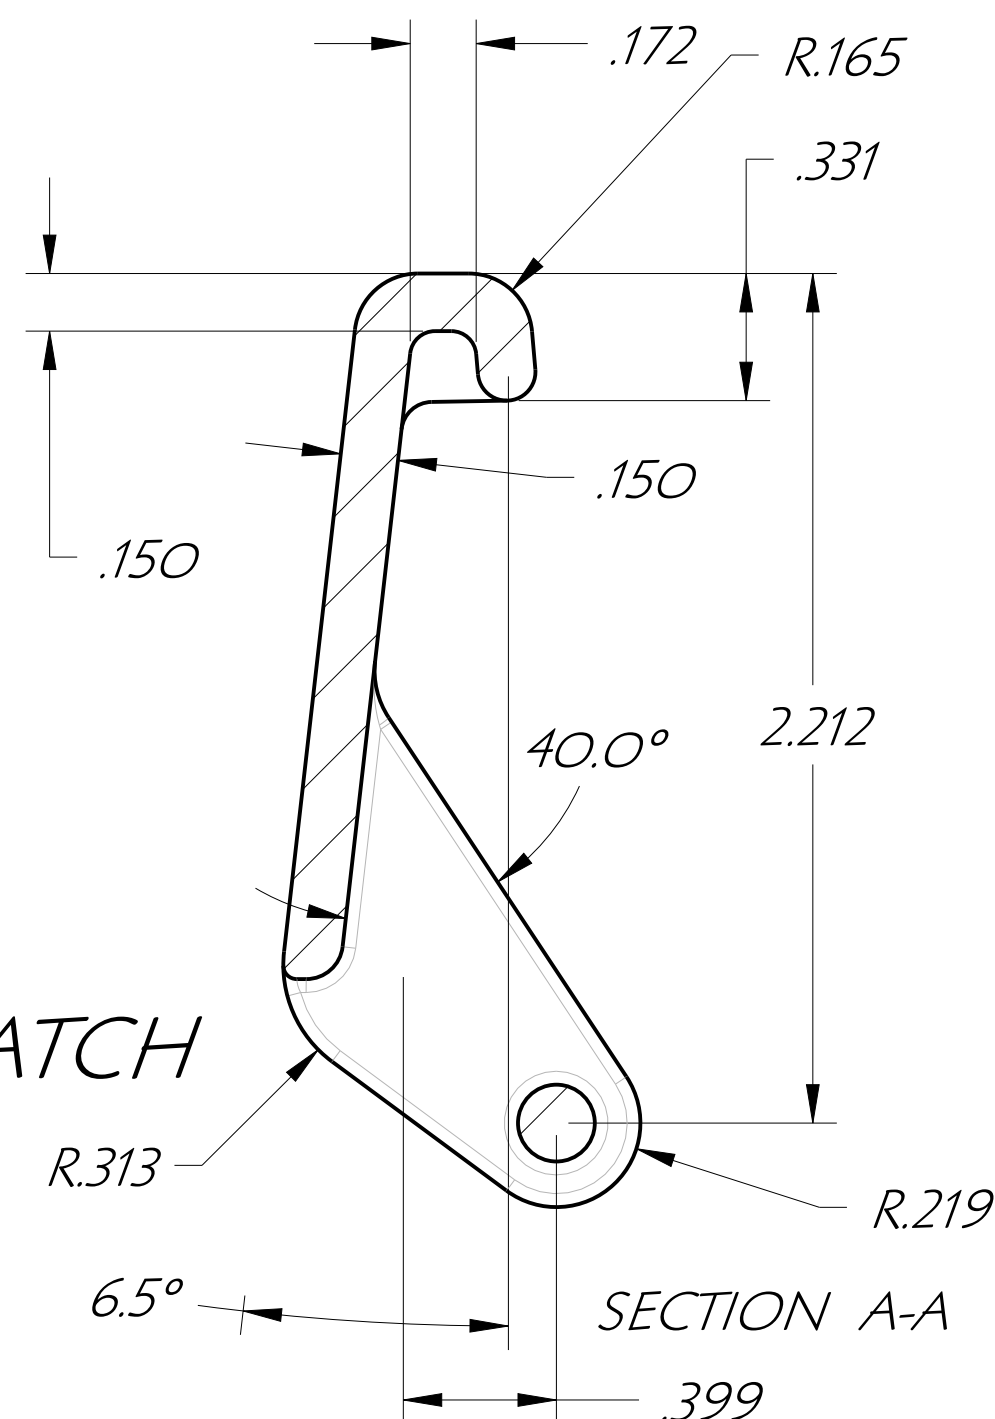


PLUG

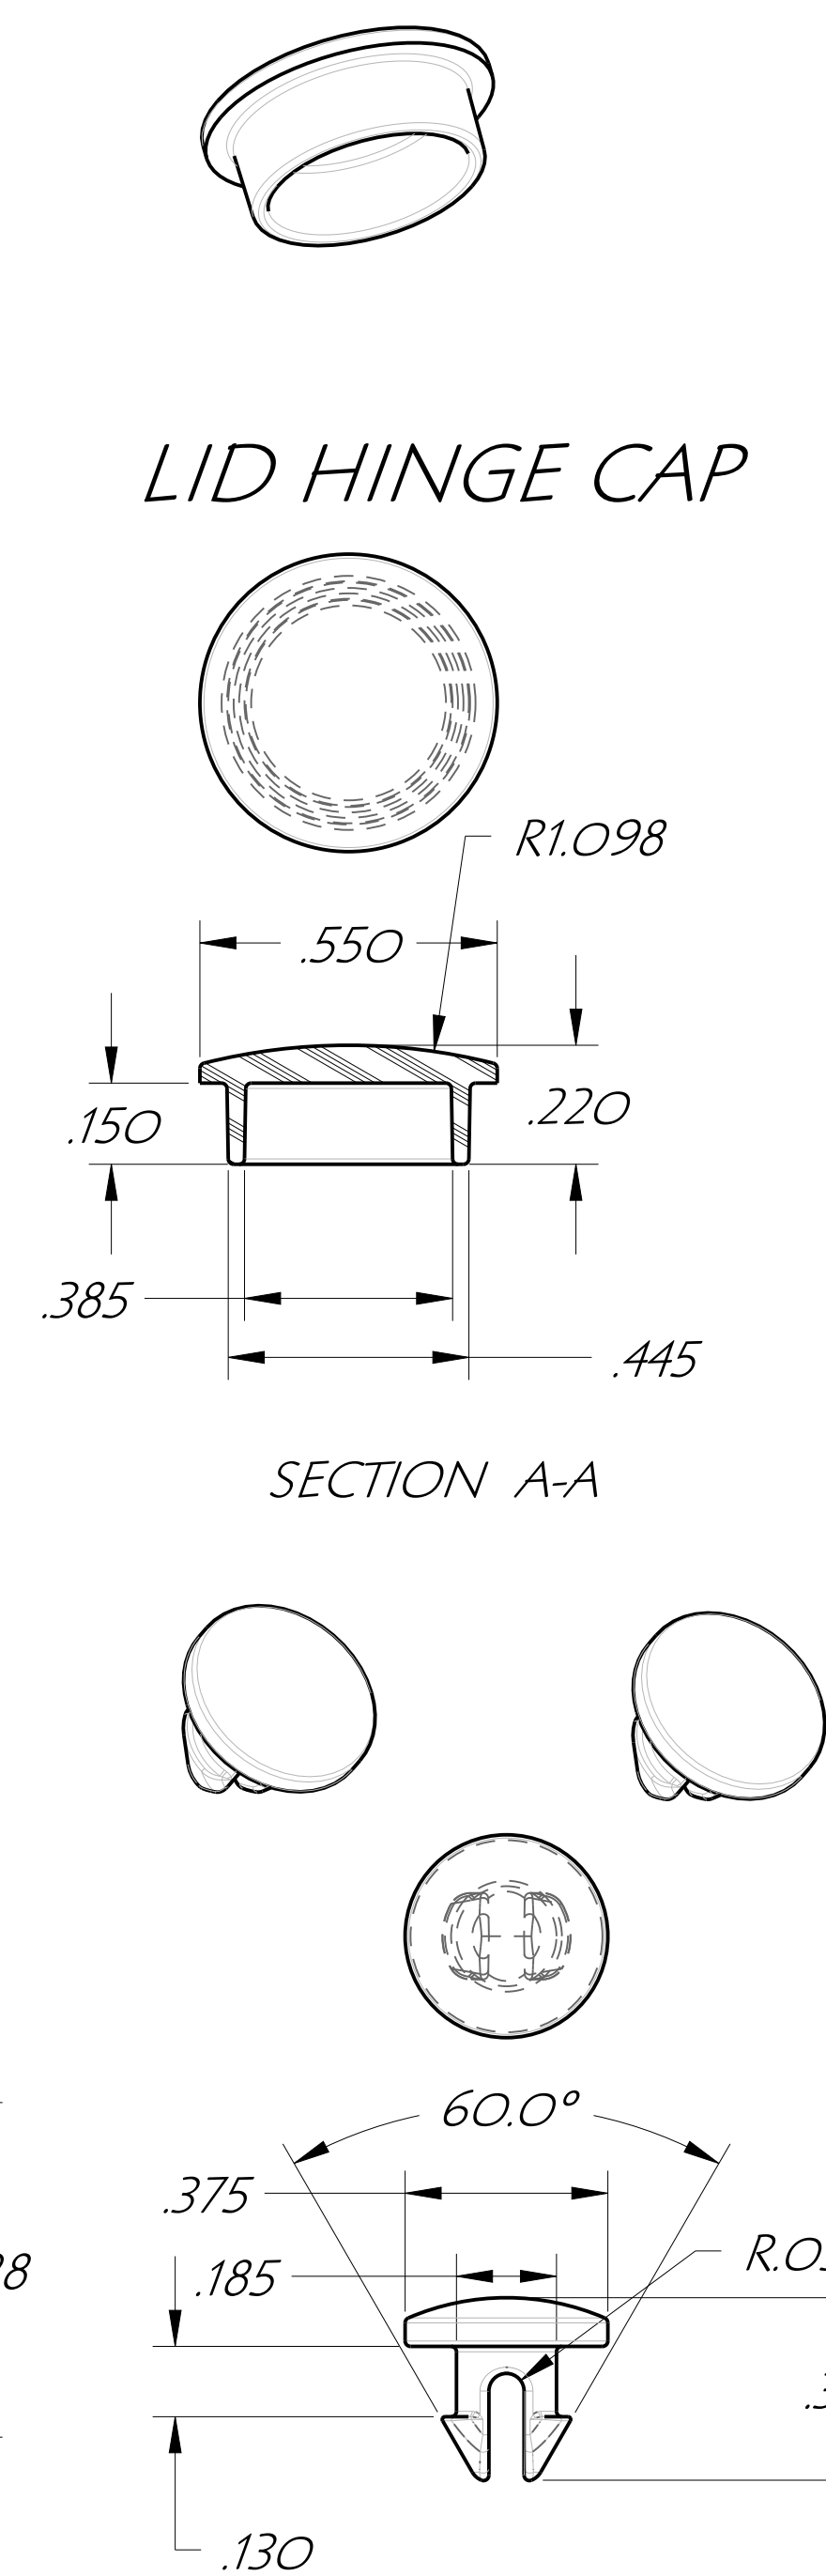



LID HINGE CAP

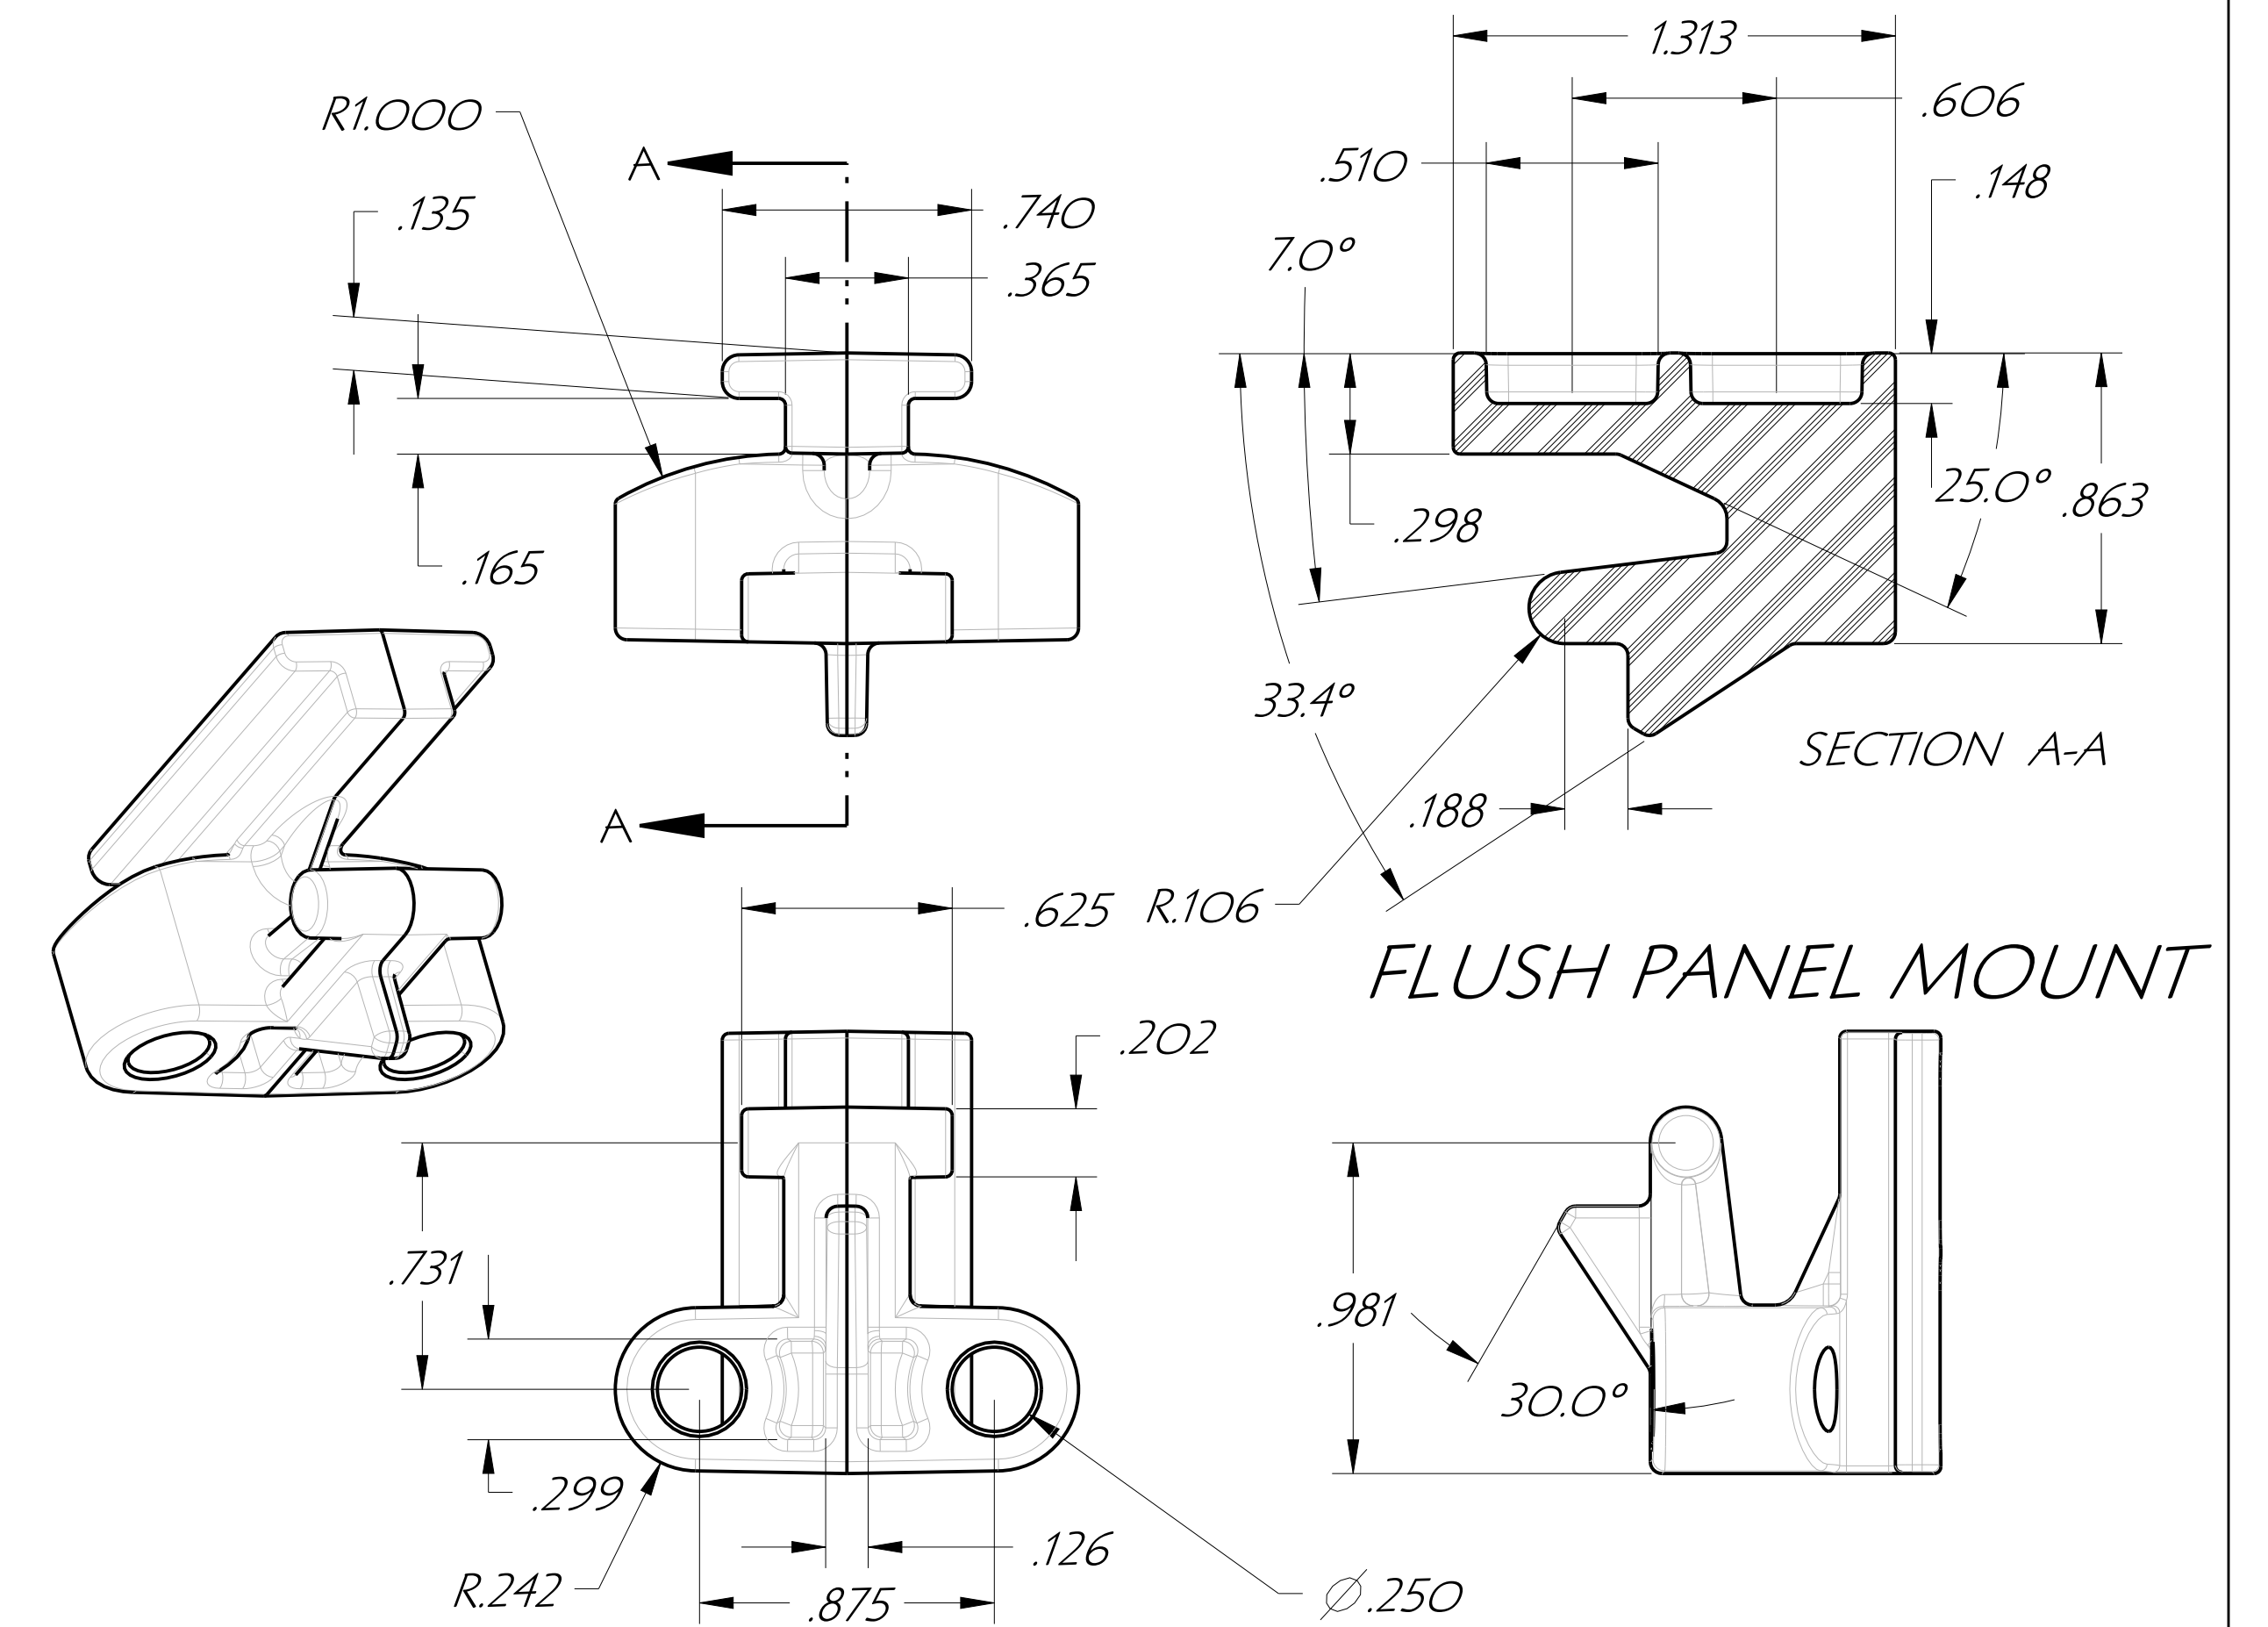

FLUSH PANEL MOUNT

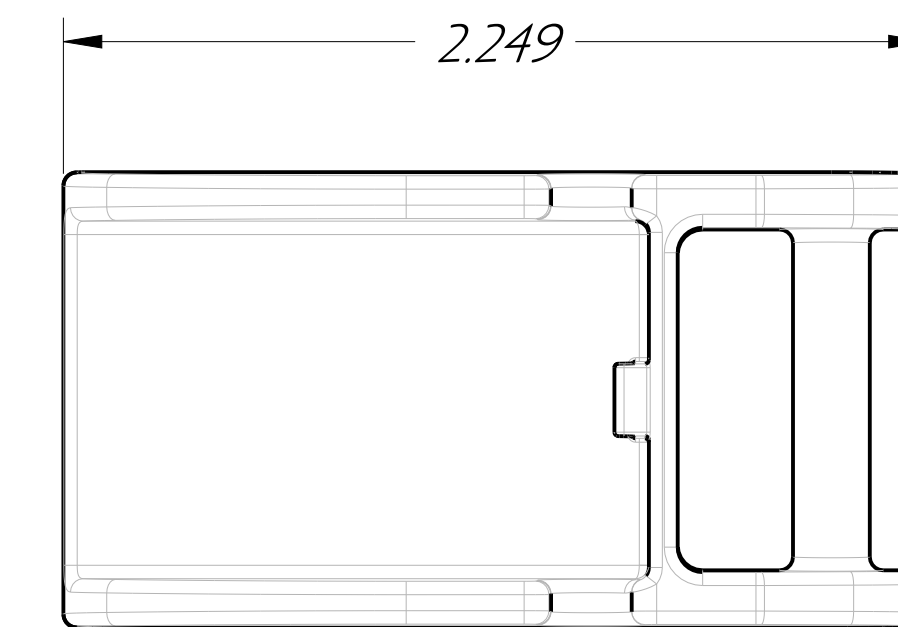

LOWER LATCH

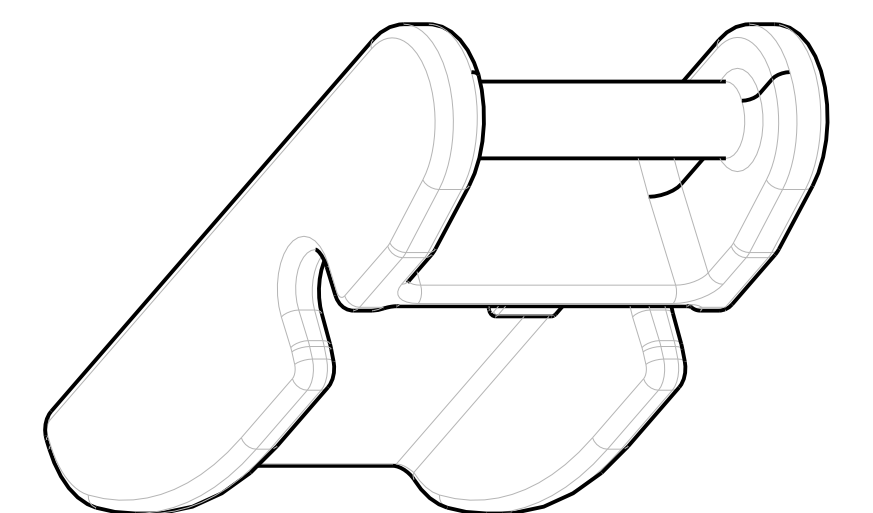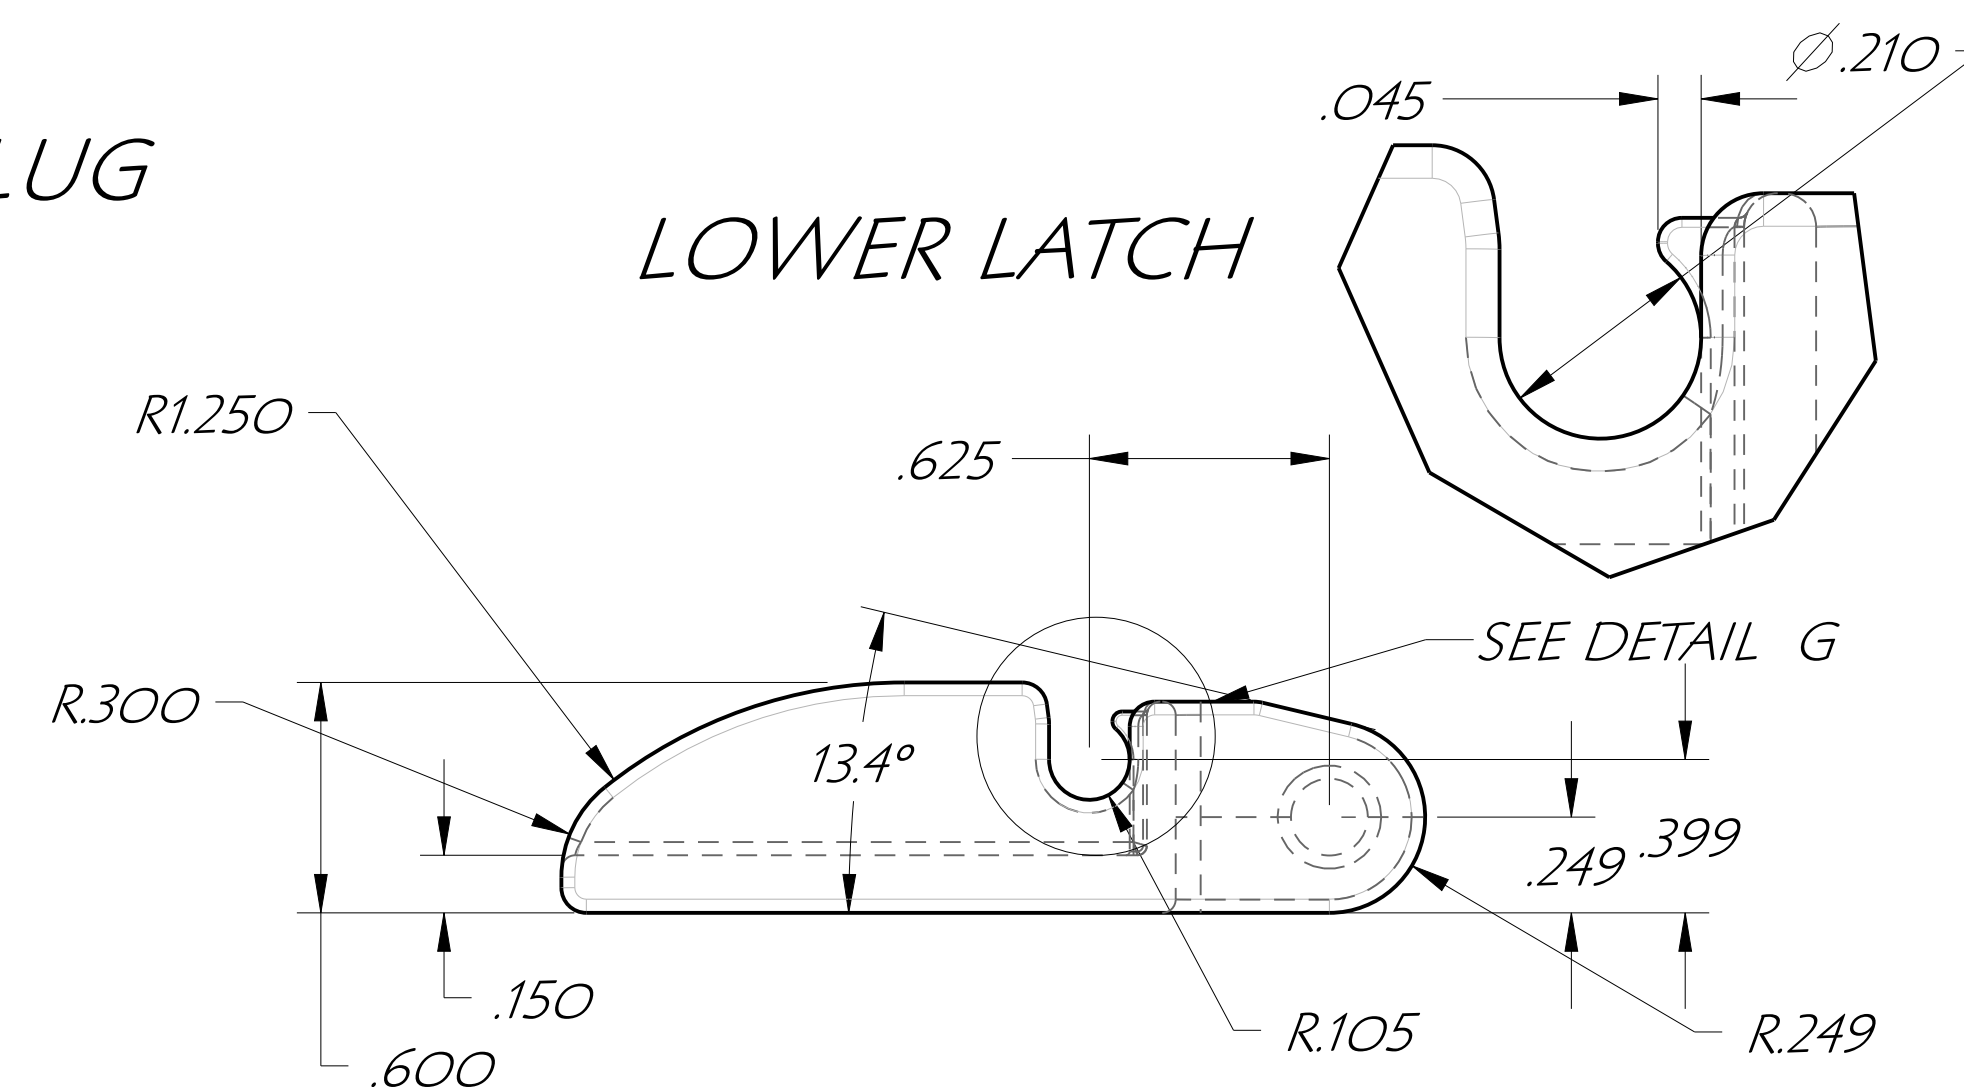

DES. C.R.W. DRN. C.R.W. CHKD.	ATTABOX		CUSTOMER	
APP. DATE 10/16/07 SCALE	PART NAME ENCLOSURE & LID		PART NO.	
TOLERANCES: 2 PLACE DEC. ±.010 3 PLACE DEC. ±.005 4 PLACE DEC. ±.0005	TOOL DESC. SINGLE CAVITY INJECTION MOLD		PART MATL. POLYCARBONATE	
UNLESS OTHERWISE SHOWN			SHRINK .0067IN. SHEET OF	