
Flex Arm Light Series



Bright Light Exactly Where You Need It!

- Simply plug it in to get light where you need it most
- Versatile mounting options including magnetic, quick-connect, flange, and more
- Adjustable high-tension arm that stays in place once you set it
- Easy-to-clean vinyl coating to protect against moisture, dust and debris
- Available with broad 50 mm or focused 18 mm light



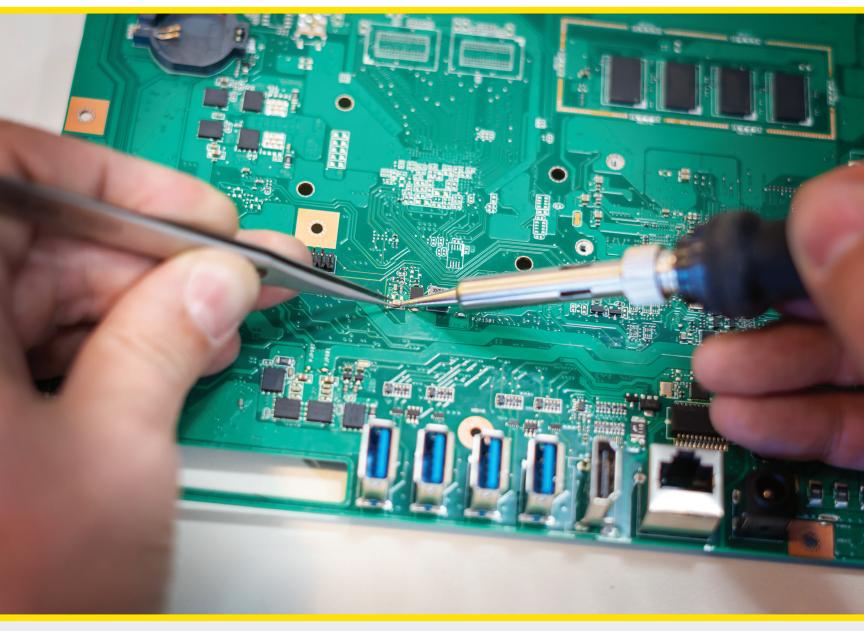

Power Supply (DC) Inline Switches

PSW-24-1	LC15T	WLS28PBQ
• Wall Mount • Input: 100 -240 V AC 50/60 Hz • Output: 24 V DC 1A • Multi-blade outlet plug • 2 m (6.5 ft) M12 4-pin Connector • UL Listed Class2	Capacitive touch switch with M12 connectors Low profile, water-resistant design On/Off or PWM Control Models Easy installation and repositioning Rated for up to 30 V DC; up to 4A maximum output current	In-line switch with M12 connectors Rugged metal housing Perfect for DC-powered task lights Rated for up to 30 V dc

Brackets

SMB22A	SMBFLXCLAMPD
Right-angle bracket with curved slot for versatile orientation 12-ga. stainless steel Mounting hole for 1/2-14 NPSM models	\bullet Use with Flex Arm Mount models having the direct mount, 2 \times 1/4-20W base



K-FLX18-18WDXQP K-FLX18-18W12FQP

K-FLX18-18WQCXQP

Banner Engineering Corp.

9714 10th Avenue North • Minneapolis, MN 55441 • 1-888-373-6767 • www.bannerengineering.com