



L-Flex

LTE/Multiband Flexible PCB Antenna

Features

- ◆ Covers 700-2700 MHz bands
- ◆ Flexible PCB for ease of mounting
- ◆ Double-sided tape mounting
- ◆ Various cable/connector options

Specifications

| | |
|-------------------|---------------------------------------|
| Frequency range | 690-960 / 1710-2170 / 2500-2700 MHz |
| Peak Gain | 2.6 / 3.0 / 2.9 dBi |
| Polarisation | Linear |
| Impedance | 50 Ohm |
| VSWR | <2.5:1 |
| Power rating | 10W |
| Cable / Connector | 10cm cable - U.FL, SMA, TS9, CRC, FME |
| Dimensions | 137 x 33 x 0.2mm |

Popular Ordering Options

| | |
|-----------------|--|
| FLFX35349-UF-10 | L-Flex antenna with 100mm cable and U.FL |
| FLFX35349-SM-10 | L-Flex antenna with 100mm cable and SMA-Male |

Specifications subject to change without notice.


5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1TF
UK

Tel: +44 (0)1280 824055
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com


EAD 
embedded antenna design ltd
Delivering Antenna Innovation

L-FLEX | LTE Multiband Flexible PCB Antenna

VSWR

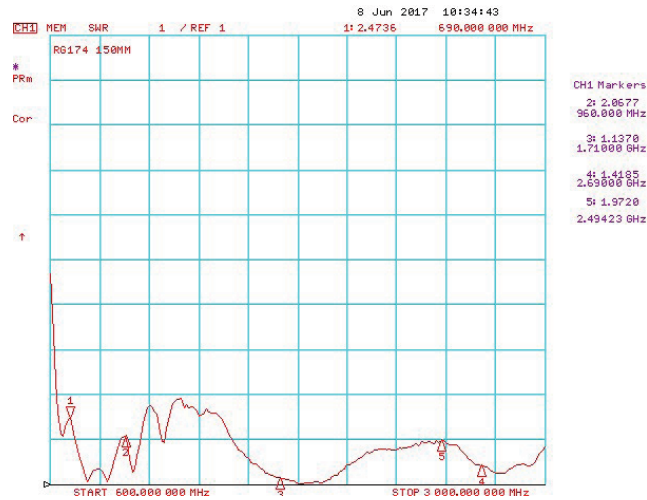

Return Loss

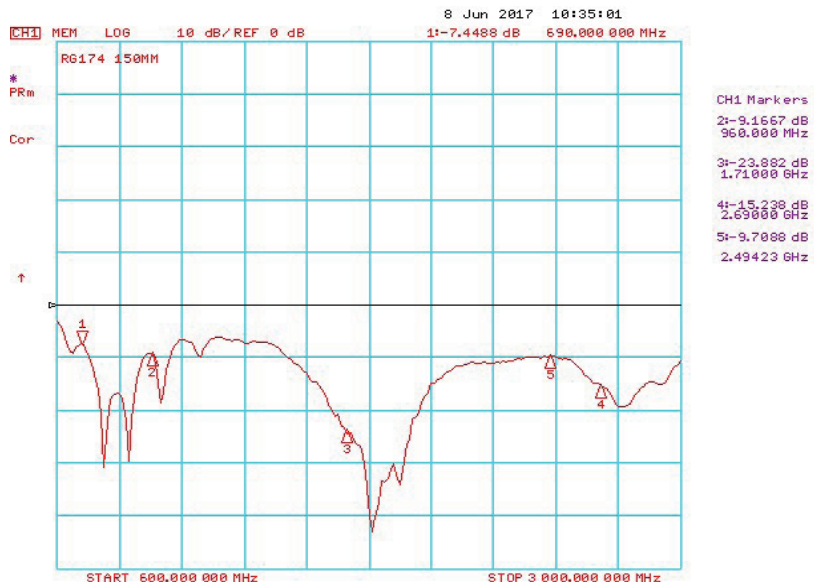

Specifications subject to change without notice.

5 Little Balmer
 Buckingham Industrial Park
 Buckingham
 MK18 1TF
 UK

Tel: +44 (0)1280 824055
 Fax: +44 (0)1280 817179
 Email: sales@ead-ltd.com
 Web: www.ead-ltd.com