

# TL50 Andon Tower Lights




Pre-assembled and locally operated Andon provides indication to improve productivity


- Model options for 3 or 4 color segments, with or without omnidirectional audible
- Tower light segments appear grey when powered off, eliminating false indication from ambient conditions
- Available in two color combinations: green, yellow, and red or blue, green, yellow and red
- Simple to install, pre-assembled devices that are available in 3 lengths
- Pre-assembled control box has capacitive touch buttons as well as status LEDs to mimic the tower light status color and animation

**BANNER**<sup>®</sup>  
more sensors, more solutions

# TL50 Basic Andon Tower Lights

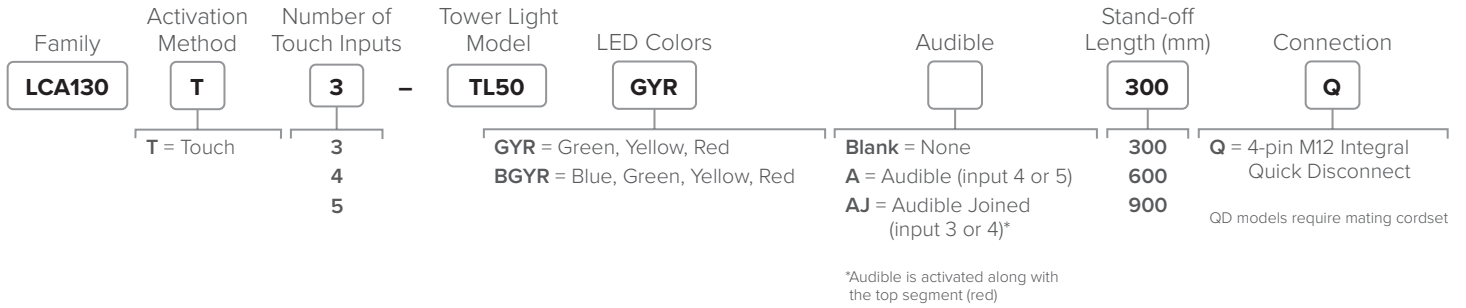

## Specifications

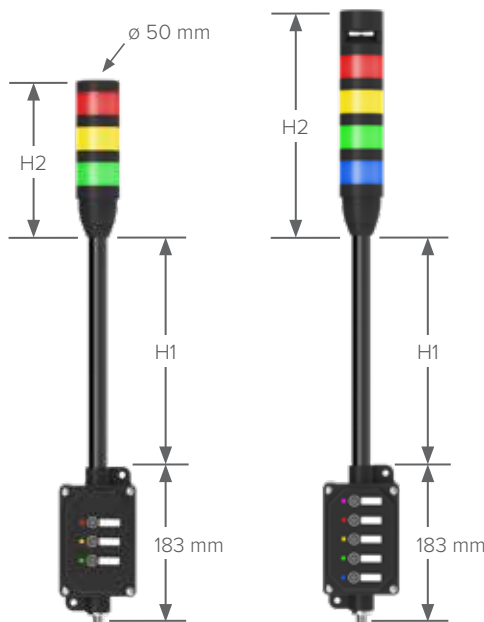

Standard	
Tower Light Height (H2)	
3 Segments	181 mm
4 Segments	222 mm

Audible	
Tower Light Height (H2)	
3 Segments	220 mm
4 Segments	261 mm

Stand-Off Pole Height (H1)	
	300 mm
	600 mm
	900 mm

Supply Voltage	18 to 30 V DC
Audible Intensity	92 dB at 1 m
Construction	Polycarbonate
Operating Conditions	Non-Audible: -40 to +50 °C Audible: -20 to +50 °C
Environmental Rating	Assembly: IP54 Stand-alone tower light: IP65
Certifications	

## Accessories

**M12 Cordset**  
Straight connector models listed; for right-angle models, add RA to the end of model number (example, MQDC-406RA)

4-Pin	
<b>MQDC-406</b>	2 m (6.5')
<b>MQDC-415</b>	5 m (16')
<b>MQDC-430</b>	9 m (30')

**M12 Double-ended Cordset**  
Straight connector models

4-Pin	
<b>MQDEC-406SS</b>	2 m (6')
<b>MQDEC-412SS</b>	3.6 m (12')
<b>MQDEC-430SS</b>	9 m (30')

**PSW-24-1**  
24 V DC, 1 A power supply



Banner Engineering Corp.

9714 10th Avenue North • Minneapolis, MN 55441 • 1-888-373-6767 • www.bannerengineering.com