

# R130C IO-Link Hub




## 8-Port Discrete IO-Link Hub

- Cost-efficiently integrate up to 16 devices into an IO-Link system
- Simplify wiring and installation with M12 QD cables
- Minimize the size of the control panel by locating I/O remotely on the machine, closer to sensors and other devices
- Provide power to lighting products and other devices that draw higher current with 4 amps shared across ports
- Streamline troubleshooting with I/O status LEDs viewable from top or side of device

# R130C IO-Link Hubs



## Specifications

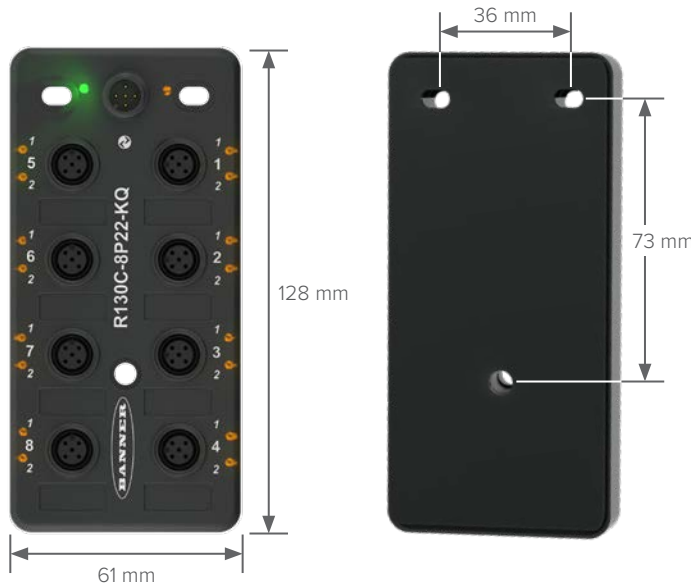

Supply Voltage	18 to 30 V DC
Construction	Black Polycarbonate
Operating Conditions	-40 to +65 °C (-40 to +149 °F)
Environmental Rating	IP65, IP66, IP67
Certifications	<b>UK CA</b>



## Accessories



**DXMR90-4K**  
IO-Link Master



**DXMR110-8K**  
IO-Link Master



**Straight/Straight**  
BC-M12F4-M12M4-22-2  
2 m (6.5')  
BC-M12F4-M12M4-22-5  
5 m (16.4')  
BC-M12F4-M12M4-22-10  
10 m (32.8')

**4-Pin M12 Double-Ended**



**Straight/Right-Angle**  
BC-M12F4-M12M4A-22-2  
2 m (6.5')  
BC-M12F4-M12M4A-22-5  
5 m (16.4')  
BC-M12F4-M12M4A-22-10  
10 m (32.8')



**4-Pin M12 Splitter**  
4-Pin male to 2x 4-Pin female  
splitter cordset

**S15YA4-M124-M124-0.2M**  
0.2 m (7.9")



Banner Engineering Corp.

9714 10th Avenue North • Minneapolis, MN 55441 • 1-888-373-6767 • www.bannerengineering.com