

Features

DC-Operated LED Indicators with 150 mm (6 in) PUR cable with quick-disconnect connector

To view or download the latest technical information about this product, including specifications, dimensions, accessories, and wiring, go to www.bannerengineering.com.

WARNING:



- Do not use this device for personnel protection
- Using this device for personnel protection could result in serious injury or death.
- This device does not include the self-checking redundant circuitry necessary to allow its use in personnel safety applications. A device failure or malfunction can cause either an energized (on) or de-energized (off) output condition.

Models

Models	Construction	Connector ⁽¹⁾	LED Function ⁽²⁾	Inputs
	M18GXRQPMA	150 mm (6 in) PUR-jacketed cable with 4-pin M12 male quick-disconnect connector	3-color Use with PNP or NPN I/O blocks to produce Green, Red, or Yellow indicator functions (see "Wiring Diagrams" on page 2).	PNP
	M18GXRNPMA			NPN
	M18RGX7PQMA		2-color Use with discrete-output sensors to provide remote indication. Red is ON when the sensor is powered, Green is ON when the output is energized.	PNP
	K30LGXRNPMA		3-color Use with PNP or NPN I/O blocks to produce Green, Red, or Yellow indicator functions (see "Wiring Diagrams" on page 2).	PNP
	K30LGXRNPMA			NPN
	K30LRGX7PQMA		2-color Use with discrete-output sensors to provide remote indication. Red is ON when the sensor is powered, Green is ON when the output is energized.	PNP
	K50LRGX7PQMA		2-color Use with discrete-output sensors to provide remote indication. Red is ON when the sensor is powered, Green is ON when the output is energized.	PNP
	K50FLRGX7PQMA		2-color Use with discrete-output sensors to provide remote indication. Red is ON when the sensor is powered, Green is ON when the output is energized.	PNP
	K80LRGX7PQMA		2-color Use with discrete-output sensors to provide remote indication. Red is ON when the sensor is powered, Green is ON when the output is energized.	PNP

The following models are no longer available for order but are still covered by the information in this document.

⁽¹⁾ Mating cable required. For use with mating M12 quick-disconnect connector cables or with M12 splitter, model CSB-M1240M1240, or equivalent.

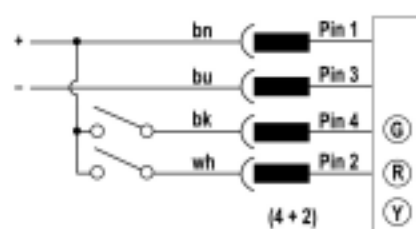
⁽²⁾ Contact Banner Engineering for other colors and color combinations, including: blue, white, orange.



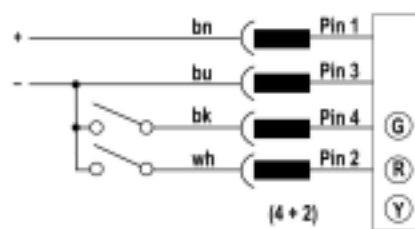
Models	Construction	Connector ⁽³⁾	LED Function ⁽⁴⁾	Inputs
	T18GXRPQMA	150 mm (6 in) PUR-jacketed cable with 4-pin M12 male quick-disconnect connector	3-color Use with PNP or NPN I/O blocks to produce Green, Red, or Yellow indicator functions (see "Wiring Diagrams" on page 2).	PNP
	T18GXRNQMA			NPN
	T18RGX7PQMA		2-color Use with discrete-output sensors to provide remote indication. Red is ON when the sensor is powered, Green is ON when the output is energized.	PNP
	T30GXRPQMA		3-color Use with PNP or NPN I/O blocks to produce Green, Red, or Yellow indicator functions (see "Wiring Diagrams" on page 2).	PNP
	T30GXRNQMA			NPN
	T30RGX7PQMA		2-color Use with discrete-output sensors to provide remote indication. Red is ON when the sensor is powered, Green is ON when the output is energized.	PNP
	T30GYX7PQMA			

Wiring Diagrams

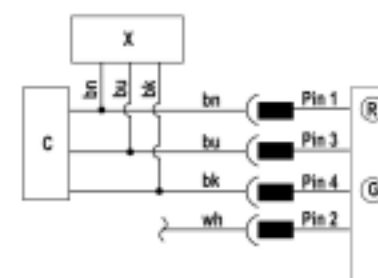
PNP (..GXRP..) 3-Color Models



NPN (..GXRN..) 3-Color Models



2-Color (..RGX7P..) Models



NOTE: When Green (G) is ON, Red (R) is OFF

Pinout



Key

1 = Brown
2 = White
3 = Blue
4 = Black

X = Banner Sensor
C = Control Box
G = Green
R = Red
Y = Yellow

Specifications

Supply Voltage and Current

K30L, T18, and M18 Models:

2-color models: 10 V DC to 30 V DC at 30 mA max.

3-color models: 10 V DC to 30 V DC at 25 mA max. per color

T30 models:

2-color models: 10 V DC to 30 V DC at 50 mA max.

3-color models: 10 V DC to 30 V DC at 40 mA max. per color

K50L, K50FL, and K80L Models:

2-color models: 18 V DC to 30 V DC at 50 mA max.

Indicators

Entire translucent diffuser or dome provides indication. See notes 1 and 2 under "Models" on page 1. For other colors/combinations, contact Banner Engineering for availability.

Construction

See "Models" on page 1

Connections

150 mm (6 in) PUR-jacketed cable with 4-pin M12 male quick-disconnect connector

Environmental Rating

Rated IP67. K80L has encapsulated electronics only; other models fully encapsulated. K30L, K50L, and K50FL quick-disconnect models meet IP69K per ISO 20653. Cabled models also meet IP69K if the cable and cable entrance are protected from high-pressure spray.

Operating Conditions

-40 °C to +50 °C (-40 °F to +122 °F)

Required Overcurrent Protection



WARNING: Electrical connections must be made by qualified personnel in accordance with local and national electrical codes and regulations.

Overcurrent protection is required to be provided by end product application per the supplied table. Overcurrent protection may be provided with external fusing or via Current Limiting, Class 2 Power Supply. Supply wiring leads < 24 AWG shall not be spliced.

⁽³⁾ Mating cable required. For use with mating M12 quick-disconnect connector cables or with M12 splitter, model CSB-M1240M1240, or equivalent.

⁽⁴⁾ Contact Banner Engineering for other colors and color combinations, including: blue, white, orange.

For additional product support, go to www.bannerengineering.com.

Supply Wire (AWG)	Required Overcurrent Protection (A)	Supply Wire (AWG)	Required Overcurrent Protection (A)
20	5.0	28	1.0
22	3.0	28	0.8
24	1.0	30	0.5

Certifications

All models:



Banner Engineering BV
Park Lane, Oulligariaan 2F bus 3
1831 Diegem, BELGIUM

K50L, K50FL, T18, and T30 models only:




Turck Banner LTD Blenheim House
Blenheim Court
Wickford, Essex SS11 8YT
GREAT BRITAIN


K30L and K50L models only:

Dimensions

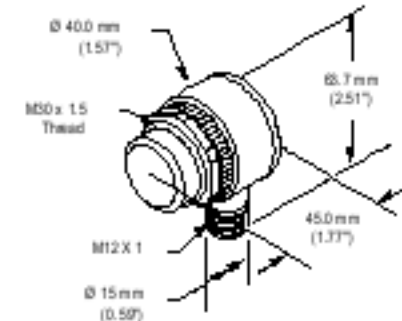
M18 Models



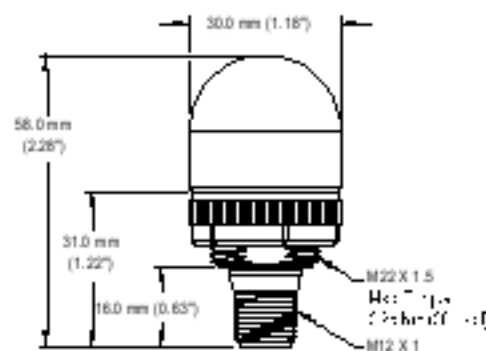
T18 Models



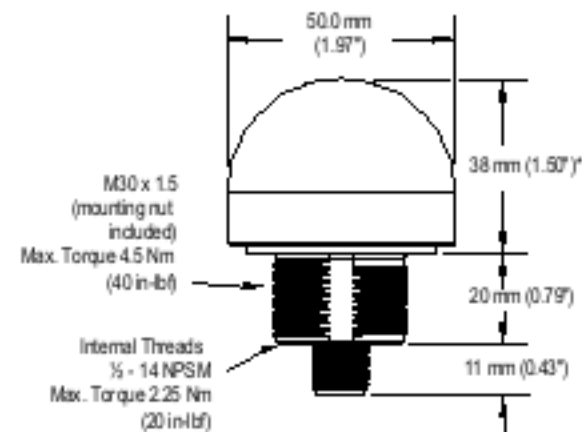
T30 Models



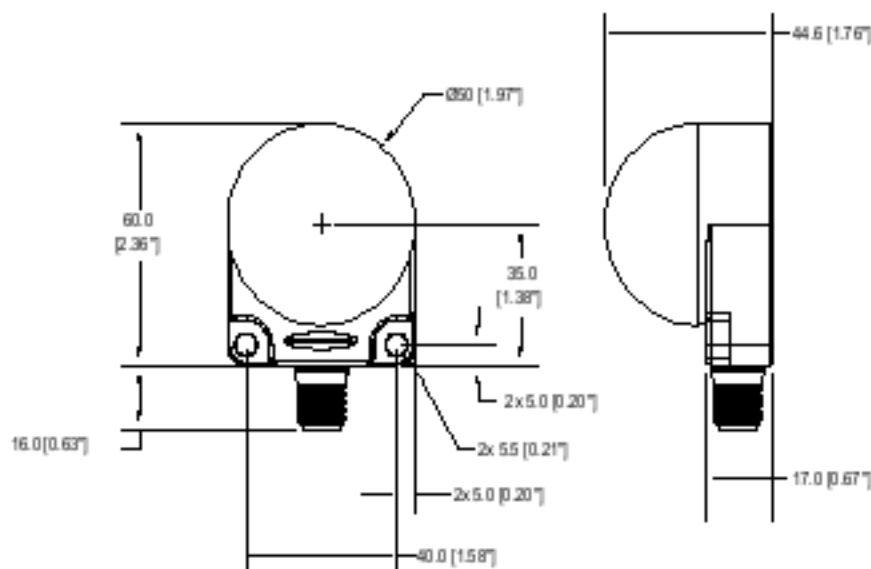
K30L Models



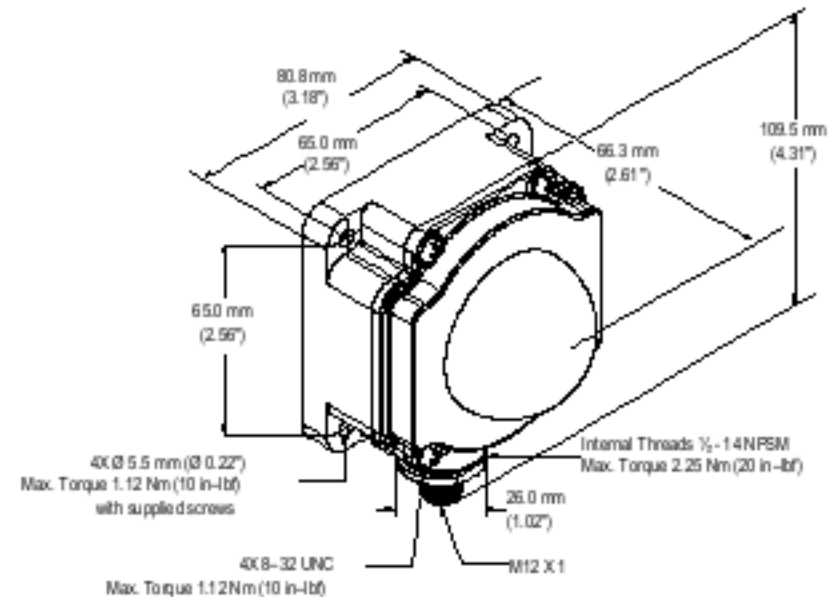
K50L Models



K50FL Models



K80L Models



Accessories

Cordsets

4-Pin Single-Ended M12 Female Cordsets				
Model	Length	Style	Dimensions	Pinout (Female)
MQDC-408	2 m (6.56 ft)	Straight		
MQDC-415	5 m (16.4 ft)			
MQDC-430	9 m (29.5 ft)			
MQDC-450	15 m (49.2 ft)	Right-Angle		
MQDC-408RA	2 m (6.56 ft)			
MQDC-415RA	5 m (16.4 ft)			
MQDC-430RA	9 m (29.5 ft)			
MQDC-450RA	15 m (49.2 ft)			


1 = Brown
2 = White
3 = Blue
4 = Black
5 = Not used




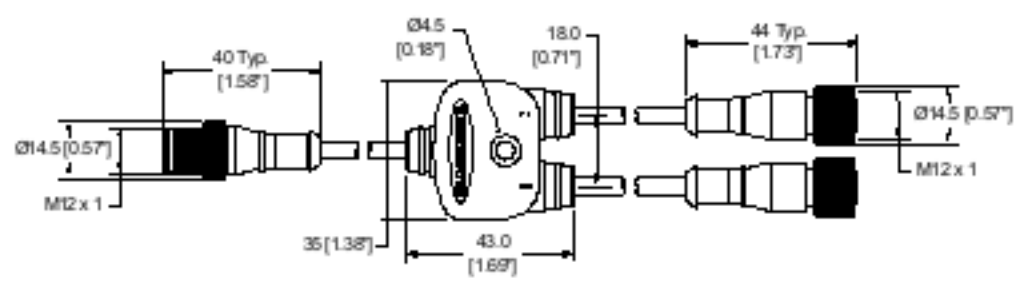
4-Pin Double-Ended M12 Female to M12 Male Cordsets				
Model	Length	Style	Dimensions	Pinout
MQDEC-401SS	0.31 m (1 ft)	Male Straight / Female Straight		Female
MQDEC-403SS	0.91 m (2.99 ft)			
MQDEC-408SS	1.83 m (6 ft)			
MQDEC-412SS	3.66 m (12 ft)			
MQDEC-415SS	4.58 m (15 ft)			
MQDEC-420SS	6.10 m (20 ft)			
MQDEC-430SS	9.14 m (30.2 ft)			
MQDEC-450SS	15.2 m (49.9 ft)	Male Right-Angle / Female Straight		Male
MQDEC-403RS	0.91 m (2.99 ft)			
MQDEC-408RS	1.83 m (6 ft)			
MQDEC-412RS	3.66 m (12 ft)			
MQDEC-420RS	6.10 m (20 ft)			
MQDEC-430RS	9.14 m (30.2 ft)			
MQDEC-450RS	15.2 m (49.9 ft)			

Continued on page 5

Continued from page 4

4-Pin Double-Ended M12 Female to M12 Male Cordsets				
Model	Length	Style	Dimensions	Pinout
MQDEC-403RR	0.9 m (2.9 ft)	Male Right-Angle / Female Right-Angle		
MQDEC-406RR	1.8 m (5.9 ft)			
MQDEC-412RR	3.6 m (11.8 ft)			
MQDEC-420RR	6.1 m (20 ft)			

4-Pin Flat Junction M12 Female Branch to M12 Male Trunk Splitter Cordsets			
Model	Branches (Female)	Trunk (Male)	Pinout
CSB-M1240M1240	No branch	No trunk	Female 
CSB-M1240M1241	2 × 0.3 m (1 ft)	No trunk	
CSB-M1241M1241		0.31 m (1 ft)	
CSB-M1248M1241		2.44 m (8 ft)	
CSB-M12415M1241		4.57 m (15 ft)	
CSB-M12425M1241		7.60 m (25 ft)	
CSB-UNT425M1241		7.60 m (25 ft) Unterminated	
CSB-M1243M1243	2 × 1 m (3.28 ft)	1 m (3.28 ft)	Male 





1 = Brown
2 = White
3 = Blue
4 = Black

Mounting Brackets

For more information about these and other available brackets, visit www.bannerengineering.com.

K50FL models include a 48 mm (1.9 in) circular hook-and-loop mounting kit for easy mounting with no additional hardware required.


For use with M18 and T18 models or base-mount T30 models

SMB18A - Right-angle mounting bracket with a curved slot for versatile orientation 12-ga. stainless steel 18 mm sensor mounting hole - Clearance for M4 (#8) hardware Hole center spacing: A to B = 24.2 Hole size: A = ø 4.6, B = 17.0 × 4.6, C = ø 18.5	
SMB312PD - Right-angle mounting bracket with a curved slot for versatile orientation 12-ga. stainless steel 18 mm sensor mounting hole - Clearance for M4 (#8) hardware Hole center spacing: A to B = 24.2 Hole size: A = ø 4.6, B = 17 × 4.6, C = ø 18.5 NOTE: Not for use with plastic fiber optic sensors	

SMB1815SF


- Swivel with set screws for mounting sensors by the cable hub
- Black reinforced thermoplastic polyester
- Stainless steel swivel locking hardware and hex wrench included

Hole center spacing: A = 36.0

Hole size: A = $\varnothing$ 5.0, B = $\varnothing$ 15.0**SMBAMS 18RA**


- Right-angle SMBAMS series bracket with 18 mm hole
- Articulation slots for 90+° rotation
- 12-ga. (2.6 mm) cold-rolled steel

Hole center spacing: A = 26.0, A to B = 13.0

Hole size: A = 26.8 x 7.0, B = $\varnothing$ 6.5, C = $\varnothing$ 19.0**SMB18Q**


- Right-angle flanged bracket
- 18 mm sensor mounting hole
- 12-ga. stainless steel

Hole center spacing: A to B = 24.2

Hole size: A = $\varnothing$ 4.6, B = 17.0 x 4.6, C = $\varnothing$ 19.0**SMBAMS 18P**


- Flat SMBAMS series bracket with 18 mm hole
- Articulation slots for 90+° rotation
- 12-ga. (2.6 mm) cold-rolled steel

Hole center spacing: A = 26.0, A to B = 13.0

Hole size: A = 26.8 x 7.0, B = $\varnothing$ 6.5, C = $\varnothing$ 19.0**SMB18SF**


- 18 mm swivel bracket with M18 x 1 internal thread
- Black thermoplastic polyester
- Stainless steel swivel locking hardware included

Hole center spacing: A = 36.0

Hole size: A = $\varnothing$ 5.3, B = $\varnothing$ 18.0**For use with base-mount K30L models****SMB22A**

- Right-angle bracket with curved slot for versatile orientation
- 12-ga. stainless steel
- Mounting hole for 22 mm sensor

Hole center spacing: A to B = 26.0

Hole size: A = $\varnothing$ 4.6, B = 4.6 x 16.9, C = 22.2


For use with T30 models or base-mount K50L models

SMB30A

- Right-angle bracket with curved slot for versatile orientation
- Clearance for M6 (1/4 in) hardware
- Mounting hole for 30 mm sensor
- 12-gauge stainless steel

Hole center spacing: A to B=40


Hole size: A=ø 6.3, B= 27.1 × 6.3, C=ø 30.5

**SMB30SC**

- Swivel bracket with 30 mm mounting hole for sensor
- Black reinforced thermoplastic polyester
- Stainless steel mounting and swivel locking hardware included

Hole center spacing: A=ø 50.8


Hole size: A=ø 7.0, B=ø 30.0

**SMBAMS30RA**

- Right-angle SMBAMS series bracket
- 30 mm hole for mounting sensors
- Articulation slots for 90°+ rotation
- 12-gauge (2.6 mm) cold-rolled steel

Hole center spacing: A=26.0, A to B=13.0

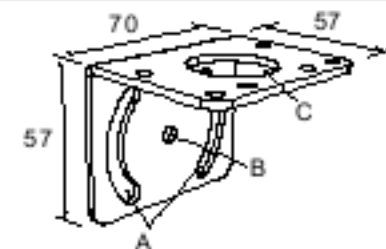
Hole size: A=26.8 × 7.0, B=ø 6.5, C=ø 31.0

**SMB30MM**

- 12-gauge stainless steel bracket with curved mounting slots for versatile orientation
- Clearance for M6 (1/4 in) hardware
- Mounting hole for 30 mm sensor

Hole center spacing: A = 51, A to B = 25.4


Hole size: A = 42.6 × 7, B = ø 6.4, C = ø 30.1

**SMBAMS30P**

- Flat SMBAMS series bracket
- 30 mm hole for mounting sensors
- Articulation slots for 90°+ rotation
- 12-gauge 300 series stainless steel

Hole center spacing: A=26.0, A to B=13.0


Hole size: A=26.8 × 7.0, B=ø 6.5, C=ø 31.0

**SMB3018SC**

- 18 mm swivel side or barrel-mount bracket
- Black reinforced thermoplastic polyester
- Stainless steel swivel locking hardware included

Hole center spacing: A = 50.8


Hole size: A = ø 7.0, B = ø 18.0



DIN-mount bracket for K80L models

SMBDX80DIN

- Black reinforced thermoplastic
- Bracket for mounting on a 35 mm DIN rail



Banner Engineering Corp Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: www.bannerengineering.com.

For patent information, see www.bannerengineering.com/patents.