

Custom Product Supplemental Instructions

Custom Model: RP-RM83F-38LT-803310



This product has been modified from the standard product. For standard product information, refer to p/n 141245 at www.bannerengineering.com, or contact Banner Engineering.

Modifications

- Derived from model RP-RM83F-38LT, p/n 10417
- SI-K30LGRX7P pre-wired
- BROWN WIRE = GREEN / ON
- BLACK WIRE = RED / STOP
- Banner reserves the right to modify this product without prior notice.

QD		RP-RM83F
1	BROWN	CH2-11
2	WHITE	CH2-12
3	BLUE	GRD
4	BLACK	CH1-11
5	GRAY	CH1-12
SI-k30		
	BLACK	CH2 -23
	BLUE	GRD
	BROWN	CH2-24
JUMPER WIRE		CH2-24 TO CH2-11

BOM	
10417	RP-RM83F-38LT
78382	PIGTAIL 5 PIN QD
16191	SI-K30LGRX7P

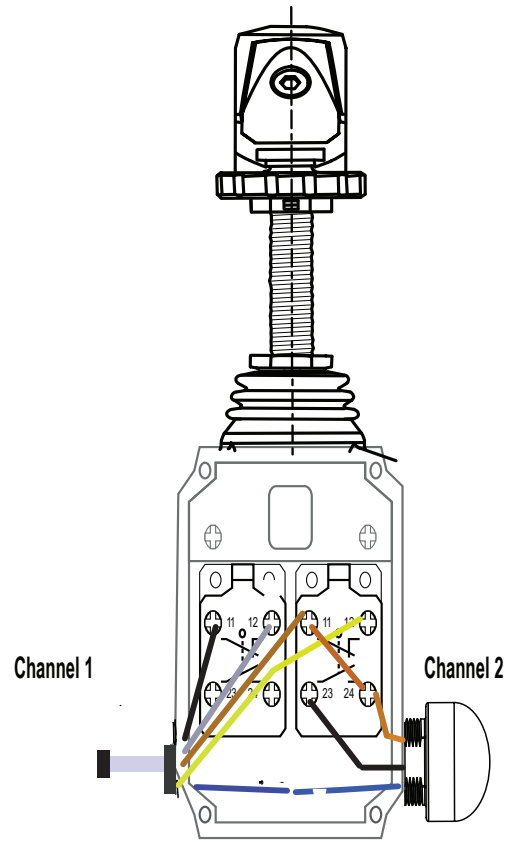


KEY

- 1 = Brown
- 2 = White
- 3 = Blue
- 4 = Black
- 5 = Gray



WARNING:

- Do not use this device for personnel protection
- Using this device for personnel protection could result in serious injury or death.
- This device does not include the self-checking redundant circuitry necessary to allow its use in personnel safety applications. A device failure or malfunction can cause either an energized (on) or deenergized (off) output



201202