

Datasheet

1 mm (0.04 in) diameter bifurcated fiber with side-view probe sensing end



- 25 mm bend radius
- Smooth ferrule
- Plastic individual fibers ideal for use in small, confined areas

Overview

Model PBPS46U is a bifurcated plastic fiber optic assembly with a 51 mm (2 in) long non-bendable side-view probe type sensing end. It is ideal for right-angle sensing in tight areas.

The PBPS46U operates in the diffuse sensing mode. Sensing light is transmitted and received through an opening located in the side of the sensing probe near the tip. Objects are detected by the light they reflect back through the opening. Fiber core diameter is 1 mm (0.04 in).



Note: The probe tip is non-bendable.

The PBPS46U may be used with plastic fiber optic sensors from the following Banner sensor families: D12, OMNI-BEAM, MAXI-BEAM, VALU-BEAM, Q45, PC44, MINI-BEAM, ECONO-BEAM. See [Fiber Installation Instructions](#) on page 1.

Fiber Installation Instructions

Sensor and Description	Installation Instructions	Drawing
<p>D12 Series sensors for use with plastic fiber optic assemblies include sensors with the letters FP in their model number suffix.</p>	<ol style="list-style-type: none"> 1. Prepare the sensor ends of the fibers (see Fiber Cutting Information on page 2). 2. Slide the fiber gripper up (open). 3. Gently insert the prepared plastic fiber sensor ends into the ports as far as they will go. 4. Slide the fiber gripper down to lock. 	
<p>PC44 Series sensors for use with plastic fiber optic assemblies include sensors with the letters FP in their model number suffix.</p>	<ol style="list-style-type: none"> 1. Prepare the sensor ends of the fibers (see Fiber Cutting Information on page 2). 2. Raise (lift up) the fiber gripper door. 3. Gently insert the prepared plastic fiber sensor ends into the ports as far as they will go. 4. Lower the fiber gripper to lock. 	



Sensor and Description	Installation Instructions	Drawing
<p>OMNI-BEAM, MAXI-BEAM, VALU-BEAM, and Q45 Series sensors for use with plastic fiber optic assemblies include sensors with the letters FP in their model number suffix.</p>	<ol style="list-style-type: none"> 1. Prepare the sensor ends of the fibers (see Fiber Cutting Information on page 2). 2. Loosen the clamp screw on the sensor face. 3. Follow steps 1-3 in the drawing at right. 	
<p>MINI-BEAM and ECONO-BEAM sensors for use with plastic fiber optic assemblies include sensors with the letters FP in their model number</p>	<ol style="list-style-type: none"> 1. Prepare the sensor ends of the fibers (see Fiber Cutting Information on page 2). 2. Loosen the clamp screw on the sensor face. 3. Follow steps 1-3 in the drawing at right. 	

Fiber Cutting Information

The plastic fiber is designed to be cut by the customer to the length required for the application. To facilitate cutting, a Banner model PFC-4 cutting device is supplied with this fiber. Cut the fiber as follows:

1. Locate the non-terminated end, and determine the length of fiber required for the application.
2. Lift the top of the cutter to open the cutting ports.
3. Insert the non-terminated end through one of the four large cutting ports on the PFC-4 cutter so that the excess fiber protrudes from the back of the cutter.
4. Double-check the fiber length, and close the cutter until the fiber is cut.
5. Gently wipe the cut ends of the fiber with a clean, dry cloth to remove any contamination.



Note: Do not use solvents or abrasives on any exposed optical fiber. Do not use a cutting port more than once. The blade may tend to dull after one cut.



Specifications

Sensing Range

A function of the sensor. Refer to the specific fiber optic/sensor combination.

Temperature Extremes

Temperatures below $-30\text{ }^{\circ}\text{C}$ ($-22\text{ }^{\circ}\text{F}$) will cause embrittlement of the plastic materials but will not cause transmission loss. Temperatures above $+70\text{ }^{\circ}\text{C}$ ($+158\text{ }^{\circ}\text{F}$) will cause both transmission loss and fiber shrinkage.

Repeat Bending/Flexing

Life expectancy of plastic fiber optic cable is in excess of one million cycles at bend radii of no less than the minimum and a bend of 90° or less. Avoid stress at the point where the cable enters the sensor (control end) and at the sensing end tip. Coiled plastic fiber optic assemblies are recommended for any application requiring reciprocating fiber motion.

Operating Temperature

$-30\text{ }^{\circ}\text{C}$ to $+70\text{ }^{\circ}\text{C}$ ($-22\text{ }^{\circ}\text{F}$ to $+158\text{ }^{\circ}\text{F}$)

Chemical Resistance

The acrylic core of the monofilament optical fiber will be damaged by contact with acids, strong bases (alkalis) and solvents. The polyethylene jacket will protect the fiber from most chemical environments. However, materials may migrate through the jacket with long term exposure. Samples of fiber optic material are available from Banner for testing and evaluation.

Minimum Bend Radius of Plastic Fiber


25 mm (1 in)

Construction

Optical Fiber: Acrylic (PMMA) monofilament
Protective Jacket: Black polyethylene
Probe End Tip: Hardened (non-bendable) T304 stainless steel

Dimensions

All measurements are listed with inches on the top and millimeters on the bottom.

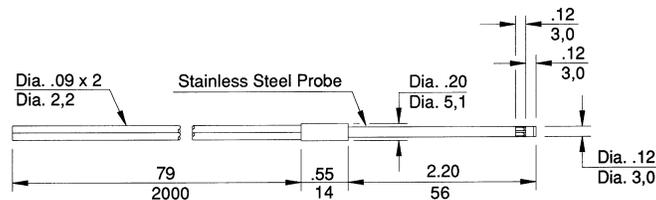

Banner Engineering Corp. Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. **IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.**

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: www.bannerengineering.com.

For patent information, see www.bannerengineering.com/patents.