

SD50 Status Display Product Manual



Original Instructions

p/n: 242994 Rev. A

06-Jan-25

© Banner Engineering Corp. All rights reserved.

Contents

Chapter 1 Features.....	3
Models	3
Chapter 2 Wiring.....	4
Chapter 3 Pro Editor Configuration for the SD50 Pro LED Status Display	5
Discrete Control	5
Basic I/O State	6
Advanced I/O State	6
I/O Block I/O State	7
Sequence Mode	7
Timer Mode.....	8
Counter Mode	8
Measure Mode	9
Factory Reset	10
Display Settings	10
Chapter 4 Specifications	11
FCC Part 15 Class A for Unintentional Radiators.....	12
Industry Canada ICES-003(A)	12
Dimensions	12
Chapter 5 Accessories.....	13
Cordsets	13
Mounting Brackets.....	13
Chapter 6 Product Support and Maintenance	15
UTF-8 Encoding Table and Unicode Characters.....	15
Clean with Mild Detergent and Water	19
Repairs	19
Contact Us	20
Banner Engineering Corp Limited Warranty	20

Chapter Contents

Models..... 3

Chapter 1

Features

The SD50 Status Display provides diagnostics and indication for control engineers and OEMs who need to improve the interaction between operators and equipment to drive response speed and productivity improvements.



- Bright programmable alphanumeric LED display
- Perimeter RGB indication for distinct visibility
- Easy configuration and default modes
- Compact, water-resistant design
- 12 V DC to 30 V DC voltage rating

Models

Model Key

Series	Height	Style	Display Length	Display Text Color	Control	Connector ⁽¹⁾
SD	50	P	300	W	D15	QP
Status Display	50 mm height	P = Pro	300 = 300 mm	W = White	D15 = Discrete 15 states	QP = 150 mm (6 in) PVC-jacketed cable with a 5-pin M12 male quick-disconnect connector

⁽¹⁾ Models with a quick-disconnect connector require a mating cordset.

Chapter Contents

Chapter 2

Wiring

SD50 Wiring

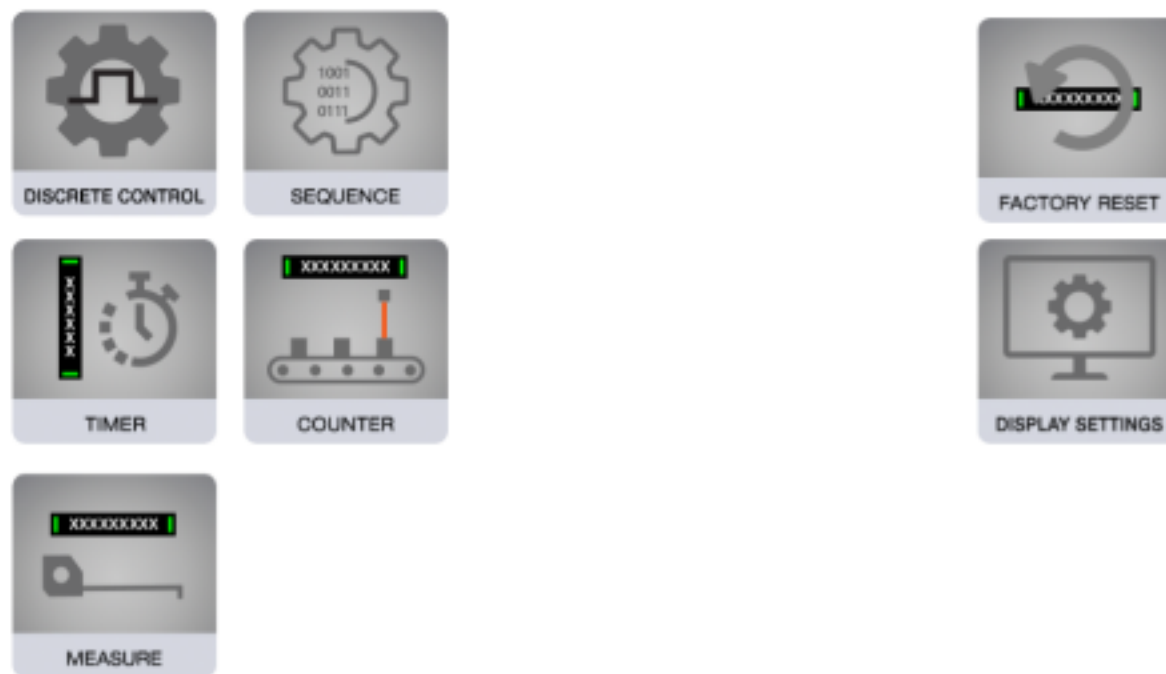
5-Pin Male M12 Pinout	Pinout Key and Wiring
	1. Brown - Input 1 2. White - Input 3 3. Blue - DC Common 4. Black - Input 2 5. Gray - Input 4

Chapter Contents

Discrete Control.....	5
Sequence Mode	7
Timer Mode	8
Counter Mode	8
Measure Mode	9
Factory Reset	10
Display Settings.....	10

Chapter 3 Pro Editor Configuration for the SD50 Pro LED Status Display

Applications



Banner's Pro Editor software offers an easy way to configure Pro Series-enabled indication, touch, and illumination devices, allowing users full control of device states and device logic modes. The easy-to-use configuration software provides a variety of tools and capabilities to solve a wide range of applications such as indicating machine status or warm-up time, indicating unique steps in an assembly process, or incorporating status information into touch buttons.

Setup any Pro Series-enabled device using the free Pro Editor software, available for download at www.bannerengineering.com/proeditor.

Discrete Control

Selecting the Discrete Control tile displays three I/O State tiles:

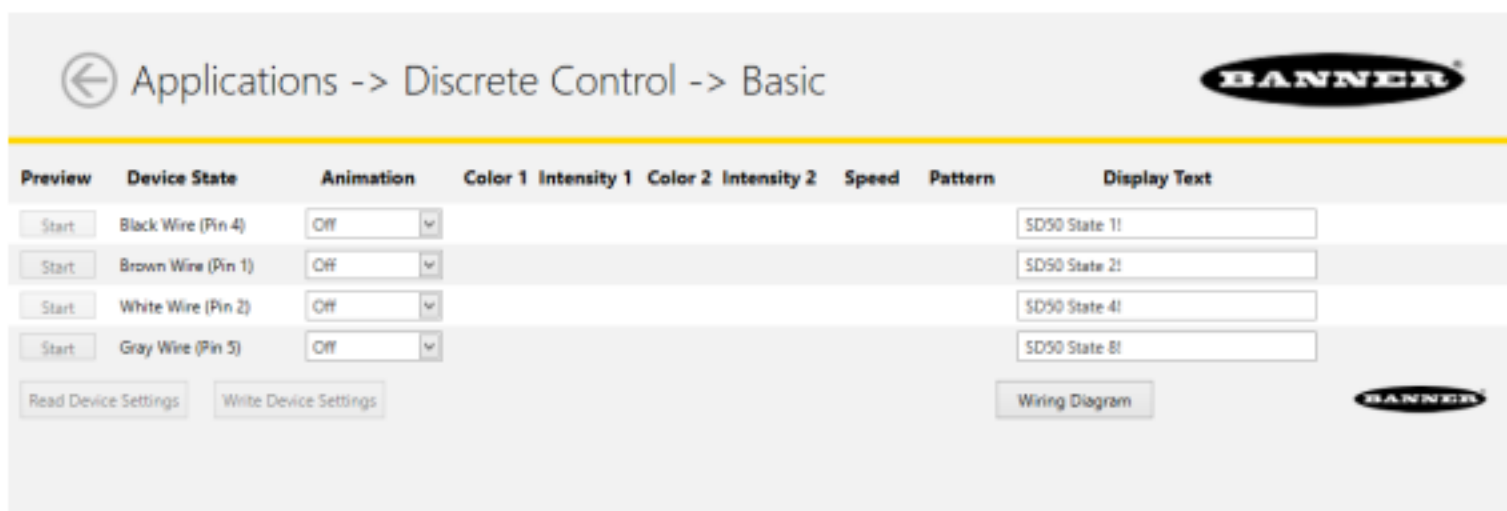
- Basic
- Advanced
- I/O Block



Basic I/O State

Basic four-state control. Configurations made in Basic I/O State assign one wire to one state, with the following override control:

- Pin 1 (Brown) overrides Pin 4 (Black)
- Pin 2 (White) overrides Pins 1 and 4 (Brown and Black)
- Pin 5 (Gray) overrides Pins 1, 2, and 4 (Brown, White, and Black)



Advanced I/O State

Advanced, default I/O state, with fifteen state options for maximum configuration ability. Configurations made in Advanced I/O State assign binary wiring combinations of all valid inputs to each state. Both the indication LEDs and the display text can be programmed for each of the states.

← Applications -> Discrete Control -> Advanced 

Preview	Device State	Animation	Color 1	Intensity 1	Color 2	Intensity 2	Speed	Pattern	Display Text
Start	Black Wire (Pin 4)	Off							SD50 State 1!
Start	Brown Wire (Pin 1)	Off							SD50 State 2!
Start	White Wire (Pin 2)	Off							SD50 State 4!
Start	Gray Wire (Pin 5)	Off							SD50 State 8!
Start	Black & Brown	Off							SD50 State 3!
Start	Black & White	Off							SD50 State 5!
Start	Black & Gray	Off							SD50 State 9!
Start	Brown & White	Off							SD50 State 6!
Start	Brown & Gray	Off							SD50 State 10!
Start	White & Gray	Off							SD50 State 12!
Start	Black & Brown & White	Off							SD50 State 7!
Start	Black & Brown & Gray	Off							SD50 State 11!
Start	Black & White & Gray	Off							SD50 State 13!
Start	Brown & White & Gray	Off							SD50 State 14!
Start	All 4 Wires	Off							SD50 State 15!

Read Device Settings Write Device Settings Wiring Diagram 

I/O Block I/O State

Three-state control for use with I/O block. Configurations made in I/O Block assign state to the black, white, and combination of black and white wires for use with the I/O blocks, for which power (brown) and common (blue) are always on for five-pin connections.

← Applications -> Discrete Control -> I/O Block 

Preview	Device State	Animation	Color 1	Intensity 1	Color 2	Intensity 2	Speed	Pattern	Display Text
Start	Black (Pin 4)	Off							SD50 State 3!
Start	White (Pin 2)	Off							SD50 State 6!
Start	Black & White	Off							SD50 State 7!

Read Device Settings Write Device Settings Wiring Diagram 

Sequence Mode

Sequence Mode allows up to sixteen states that a single input can control. A pulse on the input wire moves the SD50 to the next state.

← Applications -> Sequence 

Reset State Input: Disabled Next State Input: Disabled First Animation: 1 Last Animation: 16

Preview	State	Animation	Color 1	Intensity 1	Color 2	Intensity 2	Speed	Pattern	Display Text
Read Device Settings Write Device Settings Wiring Diagram 									

Reset State Input	Choose the desired input wire to restart the SD50 to the First Animation as chosen in the dropdown menu.
Next State Input	Choose the desired input wire to move SD50 to the next state in the series until the Last Animation is reached.
First Animation	Choose the initial state to display as the sequence is initiated.

Continued on page 8

Continued from page 7

Last Animation	Choose the final state to include in the sequence.
----------------	--

Timer Mode

Set a total time and up to four thresholds. Start and stop the timer counting up or down with discrete control. Colors change across threshold values.

Timer Mode uses the SD50 as a timer, counting up or down.



Count Seconds	The total time of the timer.
Direction	Up: Counts up from zero to Count Seconds. Down: Counts down from Count Seconds to zero.
Reset Input	Enable or disable the input wire to reset the timer to the initial value.
Auto Restart	The timer loops back to the original value automatically when it reaches its final value.

Bar Graph Orientation	Determine the starting side of the bar graph. The direction of the graph is determined by the direction of the timer.
Decimal Places	Determine the number of decimal places displayed on the Count Value.
Display Graph Only	Only display the bar graph, and not the numerical Count Value.
Display Bar Graph	Display the bar graph across the full display.
Display Slim Bar Graph	Display the bar graph as a single line of LEDs.
Display Level as Time	Display the time in HH:MM:SS format without data labels.
Data Label	Text that displays before the Count Value.
Value Label	Text that displays after the Count Value to indicate the units displayed. This can be up to three characters.
Standard Settings	Reset the SD50 to predetermined settings.

Counter Mode

Set a total count and up to four thresholds. Discrete, rising edge pulses count up or down. Colors change across threshold values.

Counter Mode uses the SD50 as a counter.



Pulses	Determine the number of counts that are either counted up to or counted down from, depending on the chosen direction.
Direction	Up: Counts from zero to Pulses. Down: Counts from Pulses to zero.
Reset Input	Enable or disable the input wire to reset the count to the initial value.

Bar Graph Orientation	Determine the starting side of the bar graph. The direction of the graph is determined by the direction of the timer.
Decimal Places	Determine the number of decimal places displayed on the Count Value.
Display Graph Only	Only display the bar graph, and not the numerical Count Value.
Display Bar Graph	Display the bar graph across the full display.
Display Slim Bar Graph	Display the bar graph as a single line of LEDs.
Data Label	Text that displays before the Count Value.
Value Label	Text that displays after the Count Value to indicate the units displayed. This can be up to three characters.
Standard Settings	Reset the SD50 to predetermined settings.

Measure Mode

Measure Mode uses the SD50 to display a measurement as either PWM control or PFM control.



PWM/PPM	PWM: Pulse-Width Modulation. PPM: Pulse-Frequency Modulation.
PWM/PPM Low	The lowest frequency of the input range.
PWM/PPM High	The highest frequency of the input range.
Filter Level	The level of filtering used to minimize the effects of noise on the output.

Continued on page 10

Continued from page 9

Hysteresis Level	The level of lag between the measurement thresholds to minimize the flickering at switch points.
Output Scale Value Low	The low-end value of the output translated from the input frequency.
Output Scale Value High	The high-end value of the output translated from the input frequency.


Bar Graph Orientation	Determine the starting side of the bar graph. The direction of the graph is determined by the direction of the timer.
Decimal Places	Determine the number of decimal places displayed on the Count Value.
Display Graph Only	Only display the bar graph, and not the numerical Count Value.
Display Bar Graph	Display the bar graph across the full display.
Display Slim Bar Graph	Display the bar graph as a single line of LEDs.
Display Level as Time	Display the time in HH:MM:SS format without data labels.
Data Label	Text that displays before the Count Value.
Value Label	Text that displays after the Count Value to indicate the units displayed. This can be up to three characters.
Standard Settings	Reset the SD50 to predetermined settings.

Factory Reset

Restore the SD50 to default settings.

Display Settings

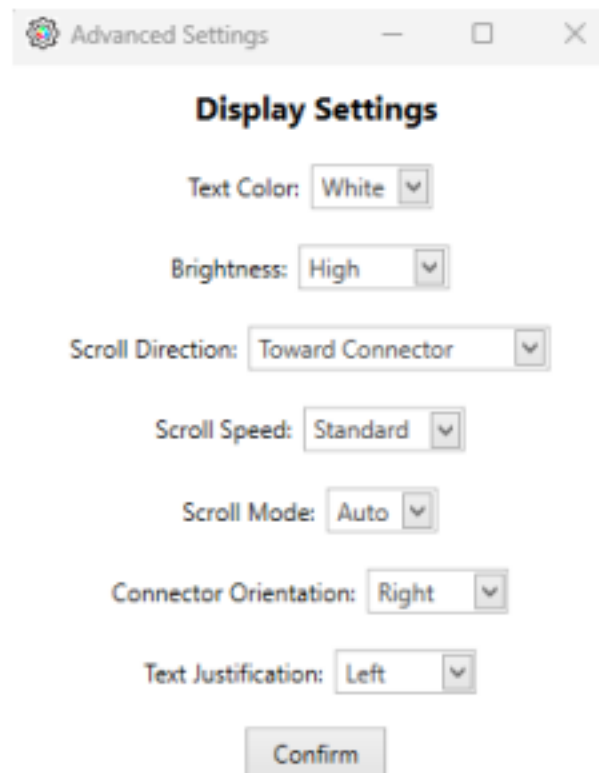Display Settings are a type of advanced settings that are accessible across all Applications.



The screenshot shows a window titled "Advanced Settings" with a close button. Inside, the "Display Settings" section is active. It contains several dropdown menus for configuration: Text Color (set to White), Brightness (set to High), Scroll Direction (set to Toward Connector), Scroll Speed (set to Standard), Scroll Mode (set to Auto), Connector Orientation (set to Right), and Text Justification (set to Left). A "Confirm" button is located at the bottom of the settings list.

Text Color	Configure the primary text color as either white or black.
Brightness	Control the brightness of the display text.
Scroll Direction	Scroll the display text either toward or away from the connector.
Scroll Speed	Control the speed the display text scrolls.
Scroll Mode	Auto: Scrolls if the number of characters is greater than sixteen. Off: Does not scroll the display text. On: Scrolls the display text regardless of the number of characters.
Connector Orientation	Determine the orientation of the connector when installed. The display text automatically adjusts to the correct orientation.
Text Justification	Control the alignment of the display text: left, right, or center.

Chapter Contents

FCC Part 15 Class A for Unintentional Radiators.....	12
Industry Canada ICES-003(A).....	12
Dimensions.....	12

Chapter 4 Specifications

Supply Voltage

12 V DC to 30 V DC

Use only with a suitable Class 2 power supply (UL) or SELV power supply (CE)

Supply Current

550 mA max. at 12 V DC

260 mA max. at 24 V DC

210 mA max. at 30 V DC

Connections

150 mm (6 in) PVC-jacketed cable with a 5-pin M12 male quick-disconnect connector

Models with a quick-disconnect connector require a mating cordset

Do not spray cable with high-pressure sprayer or cable damage will result

Operating Temperature

-20 °C to +50 °C (-4 °F to +122 °F)

Storage Temperature

-40 °C to +70 °C (-40 °F to +158 °F)

Environmental Rating

Rated IP65

Suitable for damp locations per UL 2108

Vibration and Mechanical Shock

Meets IEC 60068-2-6 requirements (Vibration: 10 Hz to 55 Hz, 1.0 mm amplitude, 5 minutes sweep, 30 minutes dwell)

Meets IEC 60068-2-27 requirements (Shock: 15G 11 ms duration, half sine wave)

Construction

Black polycarbonate housing and end caps

Internal silicone-encapsulated LEDs

Smoky polycarbonate window

Animations

Animation	Description
Off	Light is off
Steady	Color 1 is solid on at a defined intensity
Flash	Color 1 flashes at a defined speed, color intensity, and pattern (Normal, Strobe, Three Pulse, SOS, or Random)
Two Color Flash	Color 1 and Color 2 flash alternately at defined speed, color intensities, and pattern (Normal, Strobe, Three Pulse, SOS, or Random)
50/50	Color 1 and Color 2 are solid at a defined intensity
50/50 Flash	Color 1 and Color 2 flash at a defined speed, color intensity, and pattern (Normal, Strobe, Three Pulse, SOS, or Random)
Intensity Sweep	Color 1 repeatedly increases and decreases intensity between 0% to 100% at defined speed and color intensity
Two Color Sweep	Color 1 and Color 2 define the end values of a line across the color gamut. The light continuously displays a color by moving along the line at the defined speed and color intensities

Required Overcurrent Protection



WARNING: Electrical connections must be made by qualified personnel in accordance with local and national electrical codes and regulations.

Overcurrent protection is required to be provided by end product application per the supplied table.

Overcurrent protection may be provided with external fusing or via Current Limiting, Class 2 Power Supply.

Supply wiring leads < 24 AWG shall not be spliced.

For additional product support, go to www.bannerengineering.com.

Supply Wiring (AWG)	Required Overcurrent Protection (A)	Supply Wiring (AWG)	Required Overcurrent Protection (A)
20	5.0	26	1.0
22	3.0	28	0.8
24	1.0	30	0.5

Mounting

M5 and 1/4-20 compatible end caps (not included)

Clip brackets for mounting are available

FCC Part 15 Class A for Unintentional Radiators

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

(Part 15.21) Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

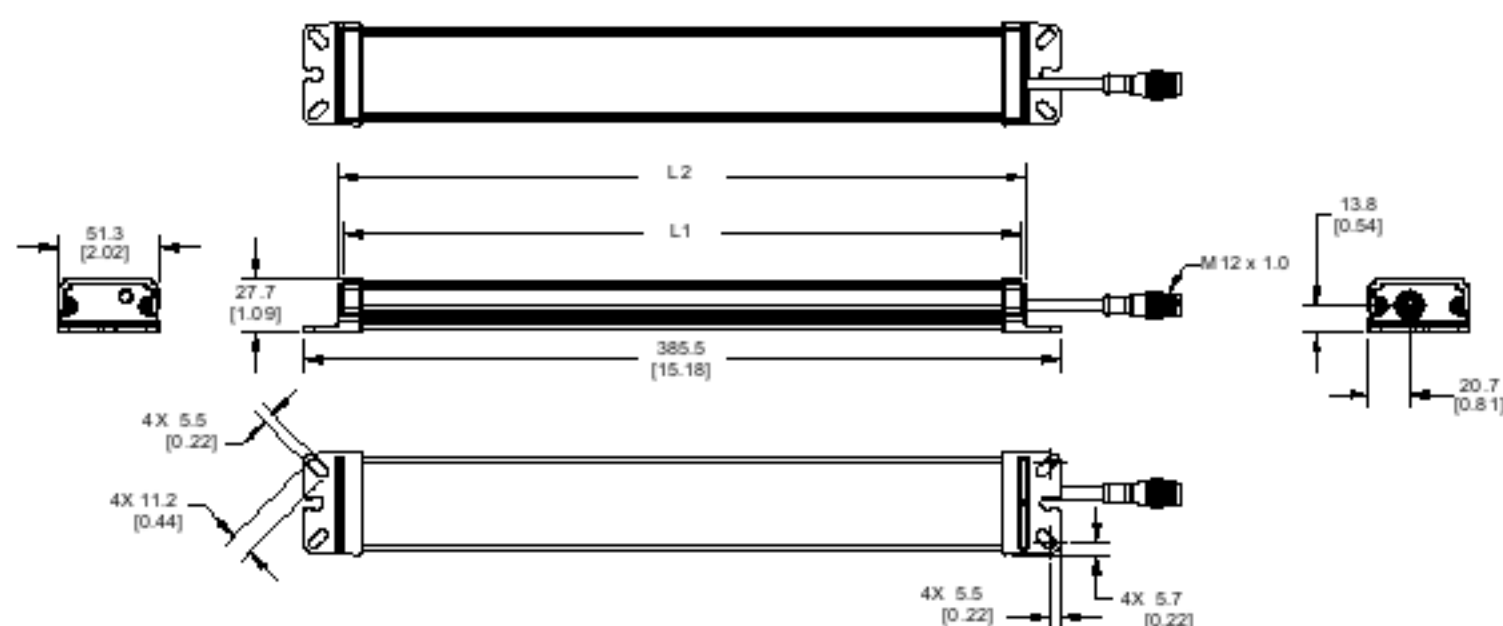
Industry Canada ICES-003(A)

This device complies with CAN ICES-3 (A)/NMB-3(A). Operation is subject to the following two conditions: 1) This device may not cause harmful interference; and 2) This device must accept any interference received, including interference that may cause undesired operation.

Cet appareil est conforme à la norme NMB-3(A). Le fonctionnement est soumis aux deux conditions suivantes : (1) ce dispositif ne peut pas occasionner d'interférences, et (2) il doit tolérer toute interférence, y compris celles susceptibles de provoquer un fonctionnement non souhaité du dispositif.

Dimensions

All measurements are listed in millimeters [inches], unless noted otherwise. The measurements provided are subject to change.



Models	L1	L2
SD50..300..	300 mm (11.81 in)	325 mm (12.8 in)



Chapter Contents

Cordsets	13
Mounting Brackets	13




Chapter 5

Accessories

Cordsets

5-Pin Double-Ended M12 Female to M12 Male Cordsets					
Model	Length	Style	Dimensions	Pinout (Male)	Pinout (Female)
MQDEC-501SS	0.31 m (1.02 ft)	Male Straight/ Female Straight			
MQDEC-503SS	0.91 m (2.99 ft)			1 = Brown 2 = White 3 = Blue	4 = Black 5 = Gray
MQDEC-506SS	1.83 m (6 ft)				
MQDEC-512SS	3.66 m (12 ft)				
MQDEC-515SS	5 m (16.4 ft)				
MQDEC-530SS	9 m (29.5 ft)				
MQDEC-550SS	15 m (49.2 ft)				

Mounting Brackets

LMBSD50 • Metal mounting bracket kit • Hardware included	
LMBSD50MAG • Magnetic mounting bracket kit • Up to 7.26 kg (16 lb) pull • Hardware included	
LMBSD50-180S • Metal mounting bracket kit with 180-degree rotation • Stainless steel • Hardware included	

LMBSD50-180SMAG

- Magnetic mounting bracket kit with 180-degree rotation
- Stainless steel
- Up to 7.26 kg (16 lb) pull
- Hardware included



Chapter Contents

UTF-8 Encoding Table and Unicode Characters	15
Clean with Mild Detergent and Water	19
Repairs	19
Contact Us	20
Banner Engineering Corp Limited Warranty	20

Chapter 6 Product Support and Maintenance

UTF-8 Encoding Table and Unicode Characters

Unicode Code Point	Character	UTF-8 (hex.)	Name
U+0020		20	SPACE
U+0021	!	21	EXCLAMATION MARK
U+0022	"	22	QUOTATION MARK
U+0023	#	23	NUMBER SIGN
U+0024	\$	24	DOLLAR SIGN
U+0025	%	25	PERCENT SIGN
U+0026	&	26	AMPERSAND
U+0027	'	27	APOSTROPHE
U+0028	(	28	LEFT PARENTHESIS
U+0029	)	29	RIGHT PARENTHESIS
U+002A	*	2a	ASTERISK
U+002B	+	2b	PLUS SIGN
U+002C	,	2c	COMMA
U+002D	-	2d	HYPHEN-MINUS
U+002E	.	2e	FULL STOP
U+002F	/	2f	SOLIDUS
U+0030	0	30	DIGIT ZERO
U+0031	1	31	DIGIT ONE
U+0032	2	32	DIGIT TWO
U+0033	3	33	DIGIT THREE
U+0034	4	34	DIGIT FOUR
U+0035	5	35	DIGIT FIVE
U+0036	6	36	DIGIT SIX
U+0037	7	37	DIGIT SEVEN
U+0038	8	38	DIGIT EIGHT
U+0039	9	39	DIGIT NINE
U+003A	:	3a	COLON
U+003B	;	3b	SEMICOLON
U+003C	<	3c	LESS-THAN SIGN
U+003D	=	3d	EQUALS SIGN
U+003E	>	3e	GREATER-THAN SIGN

Continued on page 16

Continued from page 15

Unicode Code Point	Character	UTF-8 (hex.)	Name
U+003F	?	3f	QUESTION MARK
U+0040	@	40	COMMERCIAL AT
U+0041	A	41	LATIN CAPITAL LETTER A
U+0042	B	42	LATIN CAPITAL LETTER B
U+0043	C	43	LATIN CAPITAL LETTER C
U+0044	D	44	LATIN CAPITAL LETTER D
U+0045	E	45	LATIN CAPITAL LETTER E
U+0046	F	46	LATIN CAPITAL LETTER F
U+0047	G	47	LATIN CAPITAL LETTER G
U+0048	H	48	LATIN CAPITAL LETTER H
U+0049	I	49	LATIN CAPITAL LETTER I
U+004A	J	4a	LATIN CAPITAL LETTER J
U+004B	K	4b	LATIN CAPITAL LETTER K
U+004C	L	4c	LATIN CAPITAL LETTER L
U+004D	M	4d	LATIN CAPITAL LETTER M
U+004E	N	4e	LATIN CAPITAL LETTER N
U+004F	O	4f	LATIN CAPITAL LETTER O
U+0050	P	50	LATIN CAPITAL LETTER P
U+0051	Q	51	LATIN CAPITAL LETTER Q
U+0052	R	52	LATIN CAPITAL LETTER R
U+0053	S	53	LATIN CAPITAL LETTER S
U+0054	T	54	LATIN CAPITAL LETTER T
U+0055	U	55	LATIN CAPITAL LETTER U
U+0056	V	56	LATIN CAPITAL LETTER V
U+0057	W	57	LATIN CAPITAL LETTER W
U+0058	X	58	LATIN CAPITAL LETTER X
U+0059	Y	59	LATIN CAPITAL LETTER Y
U+005A	Z	5a	LATIN CAPITAL LETTER Z
U+005B	[	5b	LEFT SQUARE BRACKET
U+005C	\	5c	REVERSE SOLIDUS
U+005D	]	5d	RIGHT SQUARE BRACKET
U+005E	^	5e	CIRCUMFLEX ACCENT
U+005F	_	5f	LOW LINE
U+0060	`	60	GRAVE ACCENT
U+0061	a	61	LATIN SMALL LETTER A
U+0062	b	62	LATIN SMALL LETTER B
U+0063	c	63	LATIN SMALL LETTER C
U+0064	d	64	LATIN SMALL LETTER D
U+0065	e	65	LATIN SMALL LETTER E
U+0066	f	66	LATIN SMALL LETTER F
U+0067	g	67	LATIN SMALL LETTER G
U+0068	h	68	LATIN SMALL LETTER H

Continued on page 17

Continued from page 16

Unicode Code Point	Character	UTF-8 (hex.)	Name
U+0069	i	69	LATIN SMALL LETTER I
U+006A	j	6a	LATIN SMALL LETTER J
U+006B	k	6b	LATIN SMALL LETTER K
U+006C	l	6c	LATIN SMALL LETTER L
U+006D	m	6d	LATIN SMALL LETTER M
U+006E	n	6e	LATIN SMALL LETTER N
U+006F	o	6f	LATIN SMALL LETTER O
U+0070	p	70	LATIN SMALL LETTER P
U+0071	q	71	LATIN SMALL LETTER Q
U+0072	r	72	LATIN SMALL LETTER R
U+0073	s	73	LATIN SMALL LETTER S
U+0074	t	74	LATIN SMALL LETTER T
U+0075	u	75	LATIN SMALL LETTER U
U+0076	v	76	LATIN SMALL LETTER V
U+0077	w	77	LATIN SMALL LETTER W
U+0078	x	78	LATIN SMALL LETTER X
U+0079	y	79	LATIN SMALL LETTER Y
U+007A	z	7a	LATIN SMALL LETTER Z
U+007B	{	7b	LEFT CURLY BRACKET
U+007C		7c	VERTICAL LINE
U+007D	}	7d	RIGHT CURLY BRACKET
U+007E	~	7e	TILDE
U+00A0		c2 a0	NO-BREAK SPACE
U+00A1	¡	c2 a1	INVERTED EXCLAMATION MARK
U+00A2	¢	c2 a2	CENT SIGN
U+00A3	£	c2 a3	POUND SIGN
U+00A4	¤	c2 a4	CURRENCY SIGN
U+00A5	¥	c2 a5	YEN SIGN
U+00A6	¦	c2 a6	BROKEN BAR
U+00A7	§	c2 a7	SECTION SIGN
U+00A8	¨	c2 a8	DIAERESIS
U+00A9	©	c2 a9	COPYRIGHT SIGN
U+00AA	ª	c2 aa	FEMININE ORDINAL INDICATOR
U+00AB	«	c2 ab	LEFT-POINTING DOUBLE ANGLE QUOTATION MARK
U+00AC	¬	c2 ac	NOT SIGN
U+00AD		c2 ad	SOFT HYPHEN
U+00AE	®	c2 ae	REGISTERED SIGN
U+00AF	ˆ	c2 af	MACRON
U+00B0	°	c2 b0	DEGREE SIGN
U+00B1	±	c2 b1	PLUS-MINUS SIGN
U+00B2	²	c2 b2	SUPERSCRPT TWO
U+00B3	³	c2 b3	SUPERSCRPT THREE

Continued on page 18

Continued from page 17

Unicode Code Point	Character	UTF-8 (hex.)	Name
U+00B4	´	c2 b4	ACUTE ACCENT
U+00B5	µ	c2 b5	MICRO SIGN
U+00B6	¶	c2 b6	PILCROW SIGN
U+00B7	·	c2 b7	MIDDLE DOT
U+00B8	¸	c2 b8	CEDILLA
U+00B9	¹	c2 b9	SUPERSCRPT ONE
U+00BA	º	c2 ba	MASCULINE ORDINAL INDICATOR
U+00BB	»	c2 bb	RIGHT-POINTING DOUBLE ANGLE QUOTATION MARK
U+00BC	¼	c2 bc	VULGAR FRACTION ONE QUARTER
U+00BD	½	c2 bd	VULGAR FRACTION ONE HALF
U+00BE	¾	c2 be	VULGAR FRACTION THREE QUARTERS
U+00BF	¿	c2 bf	INVERTED QUESTION MARK
U+00C0	À	c3 80	LATIN CAPITAL LETTER A WITH GRAVE
U+00C1	Á	c3 81	LATIN CAPITAL LETTER A WITH ACUTE
U+00C2	Â	c3 82	LATIN CAPITAL LETTER A WITH CIRCUMFLEX
U+00C3	Ã	c3 83	LATIN CAPITAL LETTER A WITH TILDE
U+00C4	Ä	c3 84	LATIN CAPITAL LETTER A WITH DIAERESIS
U+00C5	Å	c3 85	LATIN CAPITAL LETTER A WITH RING ABOVE
U+00C6	Æ	c3 86	LATIN CAPITAL LETTER AE
U+00C7	Ç	c3 87	LATIN CAPITAL LETTER C WITH CEDILLA
U+00C8	È	c3 88	LATIN CAPITAL LETTER E WITH GRAVE
U+00C9	É	c3 89	LATIN CAPITAL LETTER E WITH ACUTE
U+00CA	Ê	c3 8a	LATIN CAPITAL LETTER E WITH CIRCUMFLEX
U+00CB	Ë	c3 8b	LATIN CAPITAL LETTER E WITH DIAERESIS
U+00CC	Ì	c3 8c	LATIN CAPITAL LETTER I WITH GRAVE
U+00CD	Í	c3 8d	LATIN CAPITAL LETTER I WITH ACUTE
U+00CE	Î	c3 8e	LATIN CAPITAL LETTER I WITH CIRCUMFLEX
U+00CF	Ï	c3 8f	LATIN CAPITAL LETTER I WITH DIAERESIS
U+00D0	Ð	c3 90	LATIN CAPITAL LETTER ETH
U+00D1	Ñ	c3 91	LATIN CAPITAL LETTER N WITH TILDE
U+00D2	Ò	c3 92	LATIN CAPITAL LETTER O WITH GRAVE
U+00D3	Ó	c3 93	LATIN CAPITAL LETTER O WITH ACUTE
U+00D4	Ô	c3 94	LATIN CAPITAL LETTER O WITH CIRCUMFLEX
U+00D5	Õ	c3 95	LATIN CAPITAL LETTER O WITH TILDE
U+00D6	Ö	c3 96	LATIN CAPITAL LETTER O WITH DIAERESIS
U+00D7	×	c3 97	MULTIPLICATION SIGN
U+00D8	Ø	c3 98	LATIN CAPITAL LETTER O WITH STROKE
U+00D9	Ù	c3 99	LATIN CAPITAL LETTER U WITH GRAVE
U+00DA	Ú	c3 9a	LATIN CAPITAL LETTER U WITH ACUTE
U+00DB	Û	c3 9b	LATIN CAPITAL LETTER U WITH CIRCUMFLEX
U+00DC	Ü	c3 9c	LATIN CAPITAL LETTER U WITH DIAERESIS
U+00DD	Ý	c3 9d	LATIN CAPITAL LETTER Y WITH ACUTE

Continued on page 19

Continued from page 18

Unicode Code Point	Character	UTF-8 (hex.)	Name
U+00DE	þ	c3 9e	LATIN CAPITAL LETTER THORN
U+00DF	ß	c3 9f	LATIN SMALL LETTER SHARP S
U+00E0	à	c3 a0	LATIN SMALL LETTER A WITH GRAVE
U+00E1	á	c3 a1	LATIN SMALL LETTER A WITH ACUTE
U+00E2	â	c3 a2	LATIN SMALL LETTER A WITH CIRCUMFLEX
U+00E3	ã	c3 a3	LATIN SMALL LETTER A WITH TILDE
U+00E4	ä	c3 a4	LATIN SMALL LETTER A WITH DIAERESIS
U+00E5	å	c3 a5	LATIN SMALL LETTER A WITH RING ABOVE
U+00E6	æ	c3 a6	LATIN SMALL LETTER AE
U+00E7	ç	c3 a7	LATIN SMALL LETTER C WITH CEDILLA
U+00E8	è	c3 a8	LATIN SMALL LETTER E WITH GRAVE
U+00E9	é	c3 a9	LATIN SMALL LETTER E WITH ACUTE
U+00EA	ê	c3 aa	LATIN SMALL LETTER E WITH CIRCUMFLEX
U+00EB	ë	c3 ab	LATIN SMALL LETTER E WITH DIAERESIS
U+00EC	ì	c3 ac	LATIN SMALL LETTER I WITH GRAVE
U+00ED	í	c3 ad	LATIN SMALL LETTER I WITH ACUTE
U+00EE	î	c3 ae	LATIN SMALL LETTER I WITH CIRCUMFLEX
U+00EF	ï	c3 af	LATIN SMALL LETTER I WITH DIAERESIS
U+00F0	ð	c3 b0	LATIN SMALL LETTER ETH
U+00F1	ñ	c3 b1	LATIN SMALL LETTER N WITH TILDE
U+00F2	ó	c3 b2	LATIN SMALL LETTER O WITH GRAVE
U+00F3	ô	c3 b3	LATIN SMALL LETTER O WITH ACUTE
U+00F4	ö	c3 b4	LATIN SMALL LETTER O WITH CIRCUMFLEX
U+00F5	õ	c3 b5	LATIN SMALL LETTER O WITH TILDE
U+00F6	ö	c3 b6	LATIN SMALL LETTER O WITH DIAERESIS
U+00F7	÷	c3 b7	DIVISION SIGN
U+00F8	ø	c3 b8	LATIN SMALL LETTER O WITH STROKE
U+00F9	ù	c3 b9	LATIN SMALL LETTER U WITH GRAVE
U+00FA	ú	c3 ba	LATIN SMALL LETTER U WITH ACUTE
U+00FB	û	c3 bb	LATIN SMALL LETTER U WITH CIRCUMFLEX
U+00FC	ü	c3 bc	LATIN SMALL LETTER U WITH DIAERESIS
U+00FD	ý	c3 bd	LATIN SMALL LETTER Y WITH ACUTE
U+00FE	þ	c3 be	LATIN SMALL LETTER THORN
U+00FF	ÿ	c3 bf	LATIN SMALL LETTER Y WITH DIAERESIS

Clean with Mild Detergent and Water

Wipe down the enclosure and the display with a soft cloth that has been dampened with a mild detergent and warm water solution.

Repairs

Contact Banner Engineering for troubleshooting of this device. Do not attempt any repairs to this Banner device; it contains no field-replaceable parts or components. If the device, device part, or device component is determined to be defective by a Banner Applications Engineer, they will advise you of Banner's RMA (Return Merchandise Authorization) procedure.

IMPORTANT: If instructed to return the device, pack it with care. Damage that occurs in return shipping is not covered by warranty.

Contact Us

Banner Engineering Corp. headquarters is located at: 9714 Tenth Avenue North | Plymouth, MN 55441, USA | Phone: + 1 888 373 6767

For worldwide locations and local representatives, visit www.bannerengineering.com.

Banner Engineering Corp Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: www.bannerengineering.com.

For patent information, see www.bannerengineering.com/patents.

